



FIDO UAF Authenticator-Specific Module API

FIDO Alliance Proposed Standard 08 December 2014

This version:

<https://fidoalliance.org/specs/fido-uaf-v1.0-ps-20141208/fido-uaf-asm-api-v1.0-ps-20141208.html>

Previous version:

<https://fidoalliance.org/specs/fido-uaf-asm-api-v1.0-rd-20141008.pdf>

Editors:

[Davit Baghdasaryan, Nok Nok Labs, Inc.](#)
[John Kemp, FIDO Alliance](#)

Contributors:

[Dr. Rolf Lindemann, Nok Nok Labs, Inc.](#)
[Brad Hill, PayPal, Inc.](#)
[Roni Sasson, Discretix, Inc.](#)

The English version of this specification is the only normative version. Non-normative [translations](#) may also be available.

Copyright © 2013-2014 [FIDO Alliance](#) All Rights Reserved.

Abstract

UAF authenticators may be connected to a user device via various physical interfaces (SPI, USB, Bluetooth, etc). The UAF Authenticator-Specific Module (ASM) is a software interface on top of UAF authenticators which gives a standardized way for FIDO UAF Clients to detect and access the functionality of UAF authenticators and hides internal communication complexity from FIDO UAF Client.

This document describes the internal functionality of ASMs, defines the UAF ASM API and explains how FIDO UAF Clients should use the API.

This document's intended audience is FIDO authenticator and FIDO FIDO UAF Client

vendors.

Status of This Document

This section describes the status of this document at the time of its publication. Other documents may supersede this document. A list of current FIDO Alliance publications and the latest revision of this technical report can be found in the [FIDO Alliance specifications index](https://www.fidoalliance.org/specifications/index) at <https://www.fidoalliance.org/specifications/>.

This document was published by the [FIDO Alliance](#) as a Proposed Standard. If you wish to make comments regarding this document, please [Contact Us](#). All comments are welcome.

Implementation of certain elements of this Specification may require licenses under third party intellectual property rights, including without limitation, patent rights. The FIDO Alliance, Inc. and its Members and any other contributors to the Specification are not, and shall not be held, responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

THIS FIDO ALLIANCE SPECIFICATION IS PROVIDED “AS IS” AND WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ANY EXPRESS OR IMPLIED WARRANTY OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

This document has been reviewed by FIDO Alliance Members and is endorsed as a Proposed Standard. It is a stable document and may be used as reference material or cited from another document. FIDO Alliance's role in making the Recommendation is to draw attention to the specification and to promote its widespread deployment.

Table of Contents

1. [Notation](#)
 - 1.1 [Key Words](#)
2. [Overview](#)
 - 2.1 [Code & Example format](#)
3. [ASM Requests and Responses](#)
 - 3.1 [Request enum](#)
 - 3.2 [StatusCode Interface](#)
 - 3.2.1 [Constants](#)
 - 3.3 [ASMRequest Dictionary](#)
 - 3.3.1 [Dictionary](#) [ASMRequest](#) [Members](#)
 - 3.4 [ASMResponse Dictionary](#)
 - 3.4.1 [Dictionary](#) [ASMResponse](#) [Members](#)
 - 3.5 [GetInfo Request](#)
 - 3.5.1 [GetInfoOut Dictionary](#)
 - 3.5.1.1 [Dictionary](#) [GetInfoOut](#) [Members](#)
 - 3.5.2 [AuthenticatorInfo Dictionary](#)
 - 3.5.2.1 [Dictionary](#) [AuthenticatorInfo](#) [Members](#)
 - 3.6 [Register Request](#)
 - 3.6.1 [RegisterIn Object](#)
 - 3.6.1.1 [Dictionary](#) [RegisterIn](#) [Members](#)
 - 3.6.2 [RegisterOut Object](#)

- 3.6.2.1 Dictionary `RegisterOut` Members
- 3.6.3 Detailed Description for Processing the Register Request
- 3.7 Authenticate Request
 - 3.7.1 AuthenticateIn Object
 - 3.7.1.1 Dictionary `AuthenticateIn` Members
 - 3.7.2 Transaction Object
 - 3.7.2.1 Dictionary `Transaction` Members
 - 3.7.3 AuthenticateOut Object
 - 3.7.3.1 Dictionary `AuthenticateOut` Members
 - 3.7.4 Detailed Description for Processing the Authenticate Request
- 3.8 Deregister Request
 - 3.8.1 DeregisterIn Object
 - 3.8.1.1 Dictionary `DeregisterIn` Members
 - 3.8.2 Detailed Description for Processing the Deregister Request
- 3.9 GetRegistrations Request
 - 3.9.1 GetRegistrationsOut Object
 - 3.9.1.1 Dictionary `GetRegistrationsOut` Members
 - 3.9.2 AppRegistration Object
 - 3.9.2.1 Dictionary `AppRegistration` Members
 - 3.9.3 Detailed Description for Processing the GetRegistrations Request
- 3.10 OpenSettings Request
- 4. Using ASM API
- 5. Using the ASM API on various platforms
 - 5.1 Android ASM Intent API
 - 5.1.1 Discovering ASMs
 - 5.2 Windows ASM API
- 6. Security and Privacy Guidelines
 - 6.1 KHAccessToken
 - 6.2 Access Control for ASM APIs
- A. References
 - A.1 Normative references
 - A.2 Informative references

1. Notation

Type names, attribute names and element names are written as `code`.

String literals are enclosed in “”, e.g. “UAF-TLV”.

In formulas we use “|” to denote byte wise concatenation operations.

DOM APIs are described using the ECMAScript [ECMA-262] bindings for WebIDL [WebIDL-ED].

The notation `base64url` refers to "Base 64 Encoding with URL and Filename Safe Alphabet" [RFC4648] *without padding*.

Following [WebIDL-ED], dictionary members are optional unless they are explicitly marked as **required**.

WebIDL dictionary members **must not** have a value of null.

Unless otherwise specified, if a WebIDL dictionary member is DOMString, it **must not** be empty.

Unless otherwise specified, if a WebIDL dictionary member is a List, it **must not** be an empty list.

UAF specific terminology used in this document is defined in [FIDOGlossary].

All diagrams, examples, notes in this specification are non-normative.□

NOTE

Note: Certain dictionary members need to be present in order to comply with FIDO requirements. Such members are marked in the WebIDL definitions found in this document, as **required**. The keyword **required** has been introduced by [WebIDL-ED], which is a work-in-progress. If you are using a WebIDL parser which implements [WebIDL], then you may remove the keyword **required** from your WebIDL and use other means to ensure those fields are present.□

1.1 Key Words

The key words “**must**”, “**must not**”, “**required**”, “**shall**”, “**shall not**”, “**should**”, “**should not**”, “**recommended**”, “**may**”, and “**optional**” in this document are to be interpreted as described in [RFC2119].

2. Overview

This section is non-normative.

UAF authenticators may be connected to a user device via various physical interfaces (SPI, USB, Bluetooth, etc). The UAF Authenticator-Specific module (ASM) is a software interface on top of UAF authenticators which gives a standardized way for FIDO UAF Clients to detect and access the functionality of UAF authenticators, and hides internal communication complexity from clients.

The ASM is a platform-specific software component offering an API to FIDO UAF Clients, enabling them to discover and communicate with one or more available authenticators.

A single ASM may report on behalf of multiple authenticators.

The intended audience for this document is FIDO UAF authenticator and FIDO UAF Client vendors.

NOTE

Platform vendors might choose to not expose the ASM API defined in this document to applications. They might instead choose to expose ASM functionality through some other API (such as, for example, the Android KeyStore API, or iOS KeyChain API). In these cases it's important to make sure that the underlying ASM communicates with the FIDO UAF authenticator in a

manner defined in this document.□

The FIDO UAF protocol and its various operations is described in the FIDO UAF Protocol Specification [□AFProtocol]. The following simplified architecture diagram□ illustrates the interactions and actors this document is concerned with:

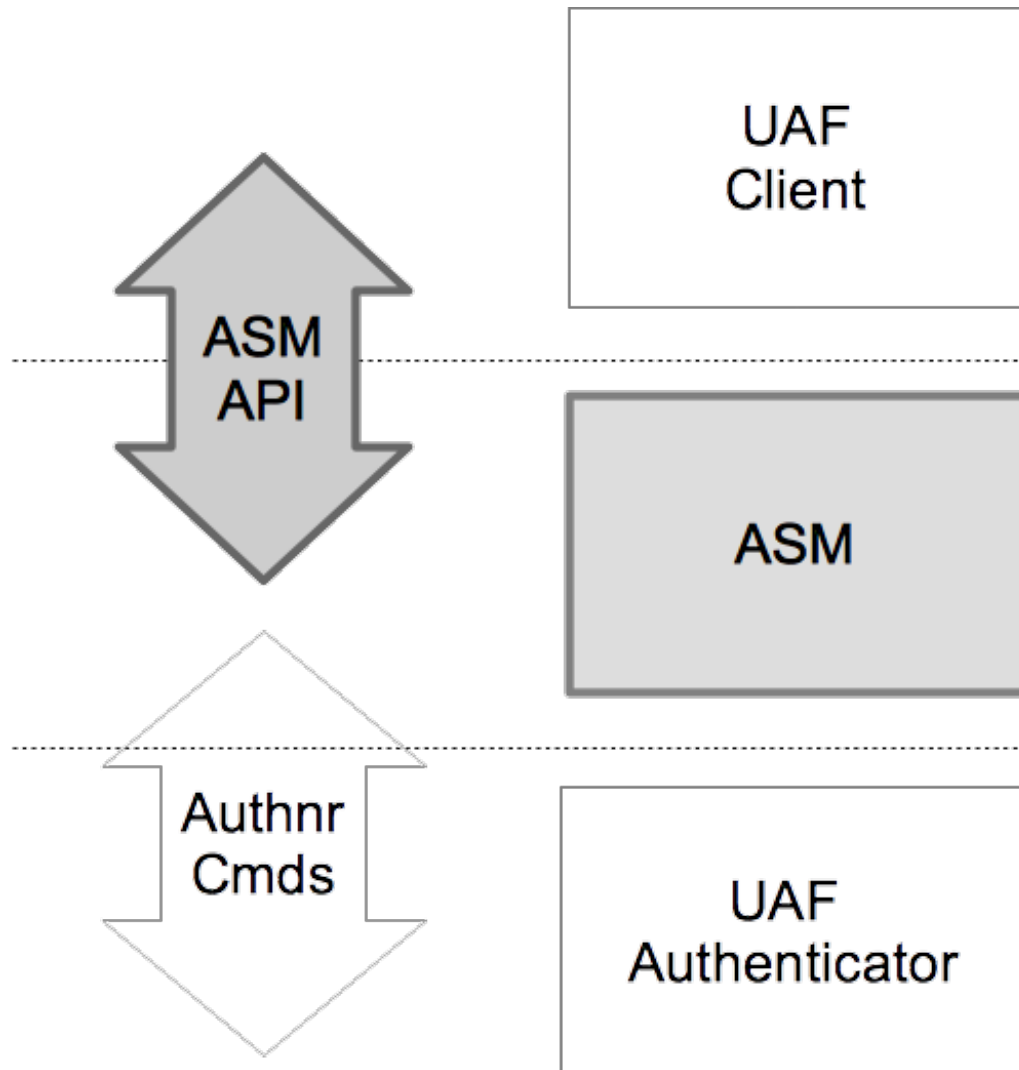


Fig. 1 UAF ASM API Architecture

2.1 Code & Example format

ASM requests and responses are presented in WebIDL format.

3. ASM Requests and Responses

This section is normative.

The ASM API is defined in terms of JSON-formatted [ECMA-404] request and reply messages. In order to send a request to an ASM, a FIDO UAF Client creates an appropriate object (e.g., in ECMAScript), "stringifies" it (also known as serialization) into a JSON-formatted string, and sends it to the ASM. The ASM de-serializes the JSON-formatted string, processes the request, constructs a response, stringifies it,□ returning it as a JSON-formatted string.

NOTE

The ASM request processing rules in this document explicitly assume that the underlying authenticator implements the "UAFV1TLV" assertion scheme (e.g. references to TLVs and tags) as described in [UAFProtocol]. If an authenticator supports a different assertion scheme then the corresponding processing rules must be replaced with appropriate assertion scheme-specific rules.

Authenticator implementers **may** create custom authenticator command interfaces other than the one defined in [OAFAuthnrCommands]. Such implementations are not required to implement the exact message-specific processing steps described in this section. However,

1. the command interfaces **must** present the ASM with external behavior equivalent to that described below in order for the ASM to properly respond to the client request messages (e.g. returning appropriate UAF status codes for specific conditions).
2. all authenticator implementations **must** support an assertion scheme as defined [UAFRegistry] and **must** return the related objects, i.e. TAG_UAFV1_REG_ASSERTION and TAG_UAFV1_AUTH_ASSERTION.

3.1 Request enum

WebIDL

```
enum Request {  
    "GetInfo",  
    "Register",  
    "Authenticate",  
    "Deregister",  
    "GetRegistrations",  
    "OpenSettings"  
};
```

Enumeration description

GetInfo	GetInfo
Register	Register
Authenticate	Authenticate
Deregister	Deregister
GetRegistrations	GetRegistrations
OpenSettings	OpenSettings

3.2 StatusCode Interface

WebIDL

```
interface StatusCode {  
    const short UAF_ASM_STATUS_OK = 0x00;  
    const short UAF_ASM_STATUS_ERROR = 0x01;  
    const short UAF_ASM_STATUS_ACCESS_DENIED = 0x02;  
    const short UAF_ASM_STATUS_USER_CANCELLED = 0x03;  
};
```

3.2.1 Constants

UAF_ASM_STATUS_OK of type **short**
No error condition encountered.

UAF_ASM_STATUS_ERROR of type **short**
An unknown error has been encountered during the processing.

UAF_ASM_STATUS_ACCESS_DENIED of type **short**
Access to this request is denied.

UAF_ASM_STATUS_USER_CANCELLED of type **short**
Indicates that user explicitly canceled the request.

3.3 ASMRequest Dictionary

All ASM requests are represented as **ASMRequest** objects.

WebIDL

```
dictionary ASMRequest {  
    required Request requestType;  
    Version asmVersion;  
    unsigned short authenticatorIndex;  
    object args;  
    Extension[] exts;  
};
```

3.3.1 Dictionary **ASMRequest** Members

requestType of type **required Request**
Request type

asmVersion of type **Version**
ASM message version to be used with this request. For the definition of the **Version** dictionary see [UAFProtocol]. The ASM version **must** be 1.0 (i.e. major version is 1 and minor version 0).

authenticatorIndex of type **unsigned short**
Refer to the **GetInfo** request for more details. Field **authenticatorIndex** **must not** be set for **GetInfo** request.

args of type **object**
Request-specific arguments. If set, this attribute **may** take one of the following types:

- **RegisterIn**
- **AuthenticateIn**
- **DeregisterIn**

exts of type array of **Extension**
List of UAF extensions. For the definition of the **Extension** dictionary see [UAFProtocol].

3.4 ASMResponse Dictionary

All ASM responses are represented as **ASMResponse** objects.

WebIDL

```
dictionary ASMResponse {
    required short statusCode;
    object responseData;
    Extension[] exts;
};
```

3.4.1 Dictionary **ASMResponse** Members

statusCode of type **required short**
must contain one of the values defined in the **statusCode** interface

responseData of type **object**
Request-specific response data. This attribute **must** have one of the following types:

- **GetInfoOut**
- **RegisterOut**
- **AuthenticateOut**
- **GetRegistrationOut**

exts of type array of **Extension**
List of UAF extensions. For the definition of the **Extension** dictionary see [\[UAFProtocol\]](#).

3.5 GetInfo Request

Return information about available authenticators.

1. Enumerate all of the authenticators this ASM supports
2. Collect information about all of them
3. Assign indices to them (**authenticatorIndex**)
4. Return the information to the caller

NOTE

Where possible, an **authenticatorIndex** should be a persistent identifier that uniquely identifies an **Authenticator** over time, even if it is repeatedly disconnected and reconnected. This avoids possible confusion if the set of available authenticators changes between a **GetInfo** request and subsequent ASM requests, and allows a FIDO client to perform caching of information about removable authenticators for a better user experience.

For a **GetInfo** request, the following **ASMRequest** member(s) **must** have the following value(s). The remaining **ASMRequest** members **should** be omitted:

- **ASMRequest.requestType** **must** be set to **GetInfo**

For a **GetInfo** response, the following **ASMResponse** member(s) **must** have the following value(s). The remaining **ASMResponse** members **should** be omitted:

- **ASMResponse.statusCode** **must** have one of the following values
 - **UAF_ASM_STATUS_OK**
 - **UAF_ASM_STATUS_ERROR**

- `ASMRResponse.responseData` **must** be an object of type `GetInfoOut`

3.5.1 GetInfoOut Dictionary

WebIDL

```
dictionary GetInfoOut {
    required AuthenticatorInfo[] Authenticators;
};
```

3.5.1.1 Dictionary `GetInfoOut` Members

Authenticators of type array of `required AuthenticatorInfo`

List of authenticators reported by the current ASM. **may** be empty an empty list.

3.5.2 AuthenticatorInfo Dictionary

WebIDL

```
dictionary AuthenticatorInfo {
    required unsigned short authenticatorIndex;
    required Version[] asmVersions;
    required boolean isUserEnrolled;
    required boolean hasSettings;
    required AAID aaid;
    required DOMString assertionScheme;
    required unsigned short authenticationAlgorithm;
    required unsigned short[] attestationTypes;
    required unsigned long userVerification;
    required unsigned short keyProtection;
    required unsigned short matcherProtection;
    required unsigned long attachmentHint;
    required boolean isSecondFactorOnly;
    required boolean isRoamingAuthenticator;
    required DOMString[] supportedExtensionIDs;
    required unsigned short tcDisplay;
    DOMString tcDisplayContentType;
    DisplayPNGCharacteristicsDescriptor[] tcDisplayPNGCharacteristics;
    DOMString title;
    DOMString description;
    DOMString icon;
};
```

3.5.2.1 Dictionary `AuthenticatorInfo` Members

authenticatorIndex of type `required unsigned short`

Authenticator index. Unique, within the scope of all authenticators reported by the ASM, index referring to an authenticator. This index is used by the UAF Client to refer to the appropriate authenticator in further requests.

asmVersions of type array of `required Version`

A list of ASM Versions that this authenticator can be used with. For the definition of the `Version` dictionary see [\[UAFProtocol\]](#).

isUserEnrolled of type `required boolean`

Indicates whether a user is enrolled with this authenticator. Authenticators which don't have user verification technology **must** always return true. Bound

authenticators which support different profiles per operating system (OS) user **must** report enrollment status for the current OS user.

hasSettings of type **required boolean**

A boolean value indicating whether the authenticator has its own settings. If so, then a FIDO UAF Client can launch these settings by sending a **OpenSettings** request.

aaid of type **required AAID**

The "Authenticator Attestation ID" (AAID), which identifies the type and batch of the authenticator. See [UAFProtocol] for the definition of the AAID structure.

assertionScheme of type **required DOMString**

The assertion scheme the authenticator uses for attested data and signatures.

AssertionScheme identifiers are defined in the UAF Protocol Specification [UAFProtocol].

authenticationAlgorithm of type **required unsigned short**

Indicates the authentication algorithm that the authenticator uses. Authentication algorithm identifiers are defined in [UAFRegistry] with **UAF_ALG** prefix.

attestationTypes of type **array of required unsigned short**

Indicates attestation types supported by the authenticator. Attestation type TAGs are defined in [UAFRegistry] with **TAG_ATTESTATION** prefix

userVerification of type **required unsigned long**

A set of bit flags indicating the user verification method(s) supported by the authenticator. The values are defined by the **USER_VERIFY** constants in [UAFRegistry].

keyProtection of type **required unsigned short**

A set of bit flags indicating the key protections used by the authenticator. The values are defined by the **KEY_PROTECTION** constants in [UAFRegistry].

matcherProtection of type **required unsigned short**

A set of bit flags indicating the matcher protections used by the authenticator. The values are defined by the **MATCHER_PROTECTION** constants in [UAFRegistry].

attachmentHint of type **required unsigned long**

A set of bit flags indicating how the authenticator is currently connected to the system hosting the FIDO UAF Client software. The values are defined by the **ATTACHMENT_HINT** constants defined in [UAFRegistry].

NOTE

Because the connection state and topology of an authenticator may be transient, these values are only hints that can be used by server-supplied policy to guide the user experience, e.g. to prefer a device that is connected and ready for authenticating or confirming a low-value transaction, rather than one that is more secure but requires more user effort. These values are not reflected in authenticator metadata and cannot be relied on by the relying party, although some models of authenticator may provide attested measurements with similar semantics as part of UAF protocol messages.

isSecondFactorOnly of type [required boolean](#)

Indicates whether the authenticator can be used only as a second factor.

isRoamingAuthenticator of type [required boolean](#)

Indicates whether this is a roaming authenticator or not.

supportedExtensionIDs of type [array of required DOMString](#)

List of supported UAF extension ids. **may** be an empty list.

tcDisplay of type [required unsigned short](#)

A set of bit flags indicating the availability and type of the authenticator's transaction confirmation display. The values are defined by the `TRANSACTION_CONFIRMATION_DISPLAY` constants in [\[UAFRegistry\]](#).

This value **must** be 0 if transaction confirmation is not supported by the authenticator.

tcDisplayContentType of type [DOMString](#)

Supported transaction content type [\[UFAuthnrMetadata\]](#).

This value **must** be present if transaction confirmation is supported, **if** `tcDisplay` is non-zero.

tcDisplayPNGCharacteristics of type [array of DisplayPNGCharacteristicsDescriptor](#)

Supported transaction Portable Network Graphic (PNG) type [\[UFAuthnrMetadata\]](#). For the definition of the

`DisplayPNGCharacteristicsDescriptor` structure see [\[UFAuthnrMetadata\]](#).

This list **must** be present if transaction confirmation is supported, **if** `tcDisplay` is non-zero.

title of type [DOMString](#)

A human-readable short title for the authenticator. It should be localized for the current locale.

NOTE

If the ASM doesn't return a title, the FIDO UAF Client must provide a title to the calling App. See section "Authenticator interface" in [\[UFAAppAPIAndTransport\]](#).

description of type [DOMString](#)

Human-readable longer description of what the authenticator represents.

NOTE

This text should be localized for current locale.

The text is intended to be displayed to the user. It might deviate from the description specified in the metadata statement for the authenticator [\[UFAuthnrMetadata\]](#).

If the ASM doesn't return a description, the FIDO UAF Client will provide a description to the calling application. See section "Authenticator interface" in [\[UFAAppAPIAndTransport\]](#).

icon of type [DOMString](#)

Portable Network Graphic (PNG) format image file representing the icon encoded as a data: url [RFC2397].

NOTE

If the ASM doesn't return an icon, the FIDO UAF Client will provide a default icon to the calling application. See section "Authenticator interface" in [UAFAppAPIAndTransport].

3.6 Register Request

Verify the user and return an authenticator-generated UAF registration assertion.

For a Register request, the following **ASMRequest** member(s) **must** have the following value(s). The remaining **ASMRequest** members **should** be omitted:

- **ASMRequest.requestType** **must** be set to **Register**
- **ASMRequest.asmVersion** **must** be set to the desired version
- **ASMRequest.authenticatorIndex** **must** be set to the target authenticator index
- **ASMRequest.args** **must** be set to an object of type **RegisterIn**

For a Register response, the following **ASMResponse** member(s) **must** have the following value(s). The remaining **ASMResponse** members **should** be omitted:

- **ASMResponse.statusCode** **must** have one of the following values:
 - **UAF_ASM_STATUS_OK**
 - **UAF_ASM_STATUS_ERROR**
 - **UAF_ASM_STATUS_ACCESS_DENIED**
 - **UAF_ASM_STATUS_USER_CANCELLED**
- **ASMResponse.responseData** **must** be an object of type **RegisterOut**

3.6.1 RegisterIn Object

WebIDL

```
dictionary RegisterIn {  
    required DOMString appID;  
    required DOMString username;  
    required DOMString finalChallenge;  
    required unsigned short attestationType;  
};
```

3.6.1.1 Dictionary **RegisterIn** Members

appID of type **required DOMString**

The FIDO server Application Identity.

username of type **required DOMString**

Human-readable user account name

finalChallenge of type **required DOMString**
base64url-encoded challenge data [RFC4648]

attestationType of type **required unsigned short**
Single requested attestation type

3.6.2 RegisterOut Object

WebIDL

```
dictionary RegisterOut {  
  required DOMString assertion;  
  required DOMString assertionScheme;  
};
```

3.6.2.1 Dictionary RegisterOut Members

assertion of type **required DOMString**
FIDO UAF authenticator registration assertion, base64url-encoded

assertionScheme of type **required DOMString**
Assertion scheme.

AssertionScheme identifiers are defined in the UAF Protocol Specification [UAFProtocol].

3.6.3 Detailed Description for Processing the Register Request

Refer to [UAFAuthnrCommands] document for more information about the TAGs and structure mentioned in this paragraph.

1. Locate authenticator using **authenticatorIndex**. If the authenticator cannot be located, then fail with **UAF_ASM_STATUS_ERROR**.
2. If a user is already enrolled with this authenticator (such as biometric enrollment, PIN setup, etc. for example) then the ASM **must** request that the authenticator verifies the user.

NOTE

If the authenticator supports **UserVerificationToken** (see [UAFAuthnrCommands]), then the ASM must obtain this token in order to later include it with the **Register** command.

- If verification fails, return **UAF_ASM_STATUS_ACCESS_DENIED**
3. If the user is not enrolled with the authenticator then take the user through the enrollment process.
 - If enrollment fails, return **UAF_ASM_STATUS_ACCESS_DENIED**
4. Construct **KHAccessToken** (see section **KHAccessToken** for more details)
5. Hash the provided **RegisterIn.finalChallenge** using the authenticator-specific hash function (**FinalChallengeHash**)

An authenticator's preferred hash function information **must** meet the algorithm defined in the **AuthenticatorInfo.authenticationAlgorithm** field.

6. Create a `TAG_UAFV1_REGISTER_CMD` structure and pass it to the authenticator
 1. Copy `FinalChallengeHash`, `KHAccessToken`, `RegisterIn.Username`, `UserVerificationToken`, `RegisterIn.AppID`, `RegisterIn.AttestationType`
 1. Depending on `AuthenticatorType` some arguments may be optional. Refer to [[UAFAuthnrCommands](#)] for more information on authenticator types and their required arguments.
7. Invoke the command and receive the response
8. Parse `TAG_UAFV1_REGISTER_CMD_RESP`
 1. Parse the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_REG_ASSERTION`) and extract `TAG_KEYID`
9. If the authenticator is a bound authenticator
 1. Store `CallerID`, `AppID`, `TAG_KEYHANDLE`, `TAG_KEYID` and `CurrentTimestamp` in the ASM's database.

NOTE

What data an ASM will store at this stage depends on underlying authenticator's architecture. For example some authenticators might store AppID, KeyHandle, KeyID inside their own secure storage. In this case ASM doesn't have to store these data in its database.

10. Create a `RegisterOut` object
 1. Set `RegisterOut.assertionScheme` according to `AuthenticatorInfo.assertionScheme`
 2. Encode the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_REG_ASSERTION`) in base64url format and set as `RegisterOut.assertion`.
 3. Return `RegisterOut` object

3.7 Authenticate Request

Verify the user and return authenticator-generated UAF authentication assertion.

For an Authenticate request, the following `ASMRequest` member(s) **must** have the following value(s). The remaining `ASMRequest` members **should** be omitted:

- `ASMRequest.requestType` **must** be set to `Authenticate`.
- `ASMRequest.asmVersion` **must** be set to the desired version.
- `ASMRequest.authenticatorIndex` **must** be set to the target authenticator index.
- `ASMRequest.args` **must** be set to an object of type `AuthenticateIn`

For an Authenticate response, the following `ASMResponse` member(s) **must** have the following value(s). The remaining `ASMResponse` members **should** be omitted:

- `ASMResponse.statusCode` **must** have one of the following values:
 - `UAF_ASM_STATUS_OK`
 - `UAF_ASM_STATUS_ERROR`
 - `UAF_ASM_STATUS_ACCESS_DENIED`
 - `UAF_ASM_STATUS_USER_CANCELLED`

- `ASMSResponse.responseData` **must** be an object of type `AuthenticateOut`

3.7.1 AuthenticateIn Object

WebIDL

```
dictionary AuthenticateIn {  
  required DOMString appID;  
  DOMString[] keyIDs;  
  required DOMString finalChallenge;  
  Transaction[] transaction;  
};
```

3.7.1.1 Dictionary `AuthenticateIn` Members

appID of type `required DOMString`
appID string

keyIDs of type array of `DOMString`
base64url [RFC4648] encoded keyIDs

finalChallenge of type `required DOMString`
base64url [RFC4648] encoded final challenge

transaction of type array of `Transaction`
An array of transaction data to be confirmed by user. If multiple transactions are provided, then the ASM **must** select the one that best matches the current display characteristics.

NOTE

This may, for example, depend on whether user's device is positioned horizontally or vertically at the moment of transaction.

3.7.2 Transaction Object

WebIDL

```
dictionary Transaction {  
  required DOMString contentType;  
  required DOMString content;  
  DisplayPNGCharacteristicsDescriptor tcDisplayPNGCharacteristics;  
};
```

3.7.2.1 Dictionary `Transaction` Members

contentType of type `required DOMString`
Contains the MIME Content-Type supported by the authenticator according to its metadata statement (see [UAFAuthnrMetadata])

content of type `required DOMString`
Contains the base64url-encoded [RFC4648] transaction content according to the `contentType` to be shown to the user.

`tcDisplayPNGCharacteristics` of type `DisplayPNGCharacteristicsDescriptor`
Transaction content PNG characteristics. For the definition of the `DisplayPNGCharacteristicsDescriptor` structure See [\[UAFAuthnrMetadata\]](#).

3.7.3 AuthenticateOut Object

WebIDL

```
dictionary AuthenticateOut {  
    required DOMString assertion;  
    required DOMString assertionScheme;  
};
```

3.7.3.1 Dictionary `AuthenticateOut` Members

`assertion` of type `required DOMString`
Authenticator UAF authentication assertion.

`assertionScheme` of type `required DOMString`
Assertion scheme

3.7.4 Detailed Description for Processing the Authenticate Request

Refer to the [\[UAFAuthnrCommands\]](#) document for more information about the TAGs and structure mentioned in this paragraph.

1. Locate the authenticator using `authenticatorIndex`
2. If no user is enrolled with this authenticator (such as biometric enrollment, PIN setup, etc.), return `UAF_ASM_STATUS_ACCESS_DENIED`
3. The ASM **must** request the authenticator to verify the user.
 - If verification fails, return `UAF_ASM_STATUS_ACCESS_DENIED`

NOTE

If the authenticator supports `UserVerificationToken` (see [\[UAFAuthnrCommands\]](#)), the ASM must obtain this token in order to later pass to `Sign` command.

4. Construct `KHAccessToken` (see section [KHAccessToken](#) for more details)
5. Hash the provided `AuthenticateIn.finalChallenge` using an authenticator-specific hash function (`FinalChallengeHash`).

The authenticator's preferred hash function information **must** meet the algorithm defined in the `AuthenticatorInfo.authenticationAlgorithm` field.

6. If this is a Second Factor authenticator and `AuthenticateIn.keyIDs` is empty, then return `UAF_ASM_STATUS_ACCESS_DENIED`
7. If `AuthenticateIn.keyIDs` is not empty,
 1. If this is a bound authenticator, then look up ASM's database with `AuthenticateIn.appID` and `AuthenticateIn.keyIDs` and obtain the KeyHandles associated with it.
 - Return `UAF_ASM_STATUS_ACCESS_DENIED` if no entry has been found

2. If this is a roaming authenticator, then treat `AuthenticateIn.keyIDs` as `KeyHandles`
8. Create `TAG_UAFV1_SIGN_CMD` structure and pass it to the authenticator.
 1. Copy `AuthenticateIn.AppID`, `AuthenticateIn.Transaction.content` (if not empty), `FinalChallengeHash`, `KHAccessToken`, `UserVerificationToken`, `KeyHandles`
 - Depending on `AuthenticatorType` some arguments may be optional. Refer to [[UAFAuthnrCommands](#)] for more information on authenticator types and their required arguments.
 - If multiple transactions are provided, select the one that best matches the current display characteristics.

NOTE

This may, for example, depend on whether user's device is positioned horizontally or vertically at the moment of transaction.

- Decode the base64url encoded `AuthenticateIn.Transaction.content` before passing it to the authenticator
9. Invoke the command and receive the response
 10. Parse `TAG_UAFV1_SIGN_CMD_RESP`
 - If it's a first-factor authenticator and the response includes `TAG_USERNAME_AND_KEYHANDLE`, then
 1. Extract usernames from `TAG_USERNAME_AND_KEYHANDLE` fields
 2. If two equal usernames are found, then choose the one which has registered most recently
 3. Show remaining distinct usernames and ask the user to choose a single username
 4. Set `TAG_UAFV1_SIGN_CMD.KeyHandles` to the single `KeyHandle` associated with the selected username.
 5. Go to step #8 and send a new `TAG_UAFV1_SIGN_CMD` command
 11. Create the `AuthenticateOut` object
 1. Set `AuthenticateOut.assertionScheme` as `AuthenticatorInfo.assertionScheme`
 2. Encode the content of `TAG_AUTHENTICATOR_ASSERTION` (e.g. `TAG_UAFV1_AUTH_ASSERTION`) in base64url format and set as `AuthenticateOut.assertion`
 3. Return the `AuthenticateOut` object

NOTE

Some authenticators might support "Transaction Confirmation Display" functionality not inside the authenticator but within the boundaries of the ASM. Typically these are software based Transaction Confirmation Displays. When processing the `Sign` command with a given transaction such ASM should show transaction content in its own UI and after user confirms it -- pass the content to authenticator so that the authenticator includes it in the final assertion.

See [[UAFRegistry](#)] for flags describing Transaction Confirmation Display type.

The authenticator metadata statement **must** truly indicate the type of transaction confirmation display implementation. Typically the "Transaction Confirmation Display" flag **will** be set to `TRANSACTION_CONFIRMATION_DISPLAY_ANY` or `TRANSACTION_CONFIRMATION_DISPLAY_PRIVILEGED_SOFTWARE`.

3.8 Deregister Request

Delete registered UAF record from the authenticator.

For a Deregister request, the following **ASMRequest** member(s) **must** have the following value(s). The remaining **ASMRequest** members **should** be omitted:

- **ASMRequest.requestType** **must** be set to `Deregister`
- **ASMRequest.asmVersion** **must** be set to the desired version
- **ASMRequest.authenticatorIndex** **must** be set to the target authenticator index
- **ASMRequest.args** **must** be set to an object of type `DeregisterIn`

For a Deregister response, the following **ASMResponse** member(s) **must** have the following value(s). The remaining **ASMResponse** members **should** be omitted:

- **ASMResponse.statusCode** **must** have one of the following values:
 - `UAF_ASM_STATUS_OK`
 - `UAF_ASM_STATUS_ERROR`
 - `UAF_ASM_STATUS_ACCESS_DENIED`

3.8.1 DeregisterIn Object

WebIDL

```
dictionary DeregisterIn {  
    required DOMString appID;  
    required DOMString keyID;  
};
```

3.8.1.1 Dictionary **DeregisterIn** Members

appID of type `required DOMString`
FIDO Server Application Identity

keyID of type `required DOMString`
Base64url-encoded [RFC4648] key identifier of the authenticator to be de-registered.

3.8.2 Detailed Description for Processing the Deregister Request

Refer to [UAFAuthnrCommands] for more information about the TAGs and structures mentioned in this paragraph.

1. Locate the authenticator using `authenticatorIndex`
2. Construct `KHAccessToken` (see section [KHAccessToken](#) for more details).
3. If this is a bound authenticator, then
 - Lookup the authenticator related data in the ASM database and delete the

record associated with `DeregisterIn.appID` and `DeregisterIn.keyID`

4. Create the `TAG_UAFV1_DEREGISTER_CMD` structure, copy `KHAccessToken`, `DeregisterIn.keyID` and pass it to the authenticator.
5. Invoke the command and receive the response

3.9 GetRegistrations Request

Return all registrations made for the calling FIDO UAF Client.

For a GetRegistrations request, the following `ASMRequest` member(s) **must** have the following value(s). The remaining `ASMRequest` members **should** be omitted:

- `ASMRequest.requestType` **must** be set to `GetRegistrations`
- `ASMRequest.asmVersion` **must** be set to the desired version
- `ASMRequest.authenticatorIndex` **must** be set to corresponding ID

For a GetRegistrations response, the following `ASMResponse` member(s) **must** have the following value(s). The remaining `ASMResponse` members **should** be omitted:

- `ASMResponse.statusCode` **must** have one of the following values:
 - `UAF_ASM_STATUS_OK`
 - `UAF_ASM_STATUS_ERROR`
- The `ASMResponse.responseData` **must** be an object of type `GetRegistrationsOut`

3.9.1 GetRegistrationsOut Object

WebIDL

```
dictionary GetRegistrationsOut {  
    required AppRegistration[] appRegs;  
};
```

3.9.1.1 Dictionary `GetRegistrationsOut` Members

appRegs of type array of required `AppRegistration`

List of registrations associated with an `appID` (see `AppRegistration` below). **may** be an empty list.

3.9.2 AppRegistration Object

WebIDL

```
dictionary AppRegistration {  
    required DOMString appID;  
    required DOMString[] keyIDs;  
};
```

3.9.2.1 Dictionary `AppRegistration` Members

appID of type required `DOMString`

FIDO Server Application Identity.

`keyIDs` of type array of required `DOMString`
List of key identifiers associated with the `appID`

3.9.3 Detailed Description for Processing the GetRegistrations Request

1. Locate the authenticator using `authenticatorIndex`
2. If this is bound authenticator, then
 - Lookup the registrations associated with CallerID and AppID in the ASM database and construct a list of `AppRegistration` objects

NOTE

Some ASMs might not store this information inside their own database. Instead it might have been stored inside the authenticator's secure storage area. In this case the ASM must send a proprietary command to obtain the necessary data.

3. Create `GetRegistrationsOut` object and return

3.10 OpenSettings Request

Display the authenticator-specific settings interface. If the authenticator has its own built-in user interface, then the ASM **must** invoke `TAG_UAFV1_OPEN_SETTINGS_CMD` to display it.

For an OpenSettings request, the following `ASMRequest` member(s) **must** have the following value(s). The remaining `ASMRequest` members **should** be omitted:

- `ASMRequest.requestType` **must** be set to `OpenSettings`
- `ASMRequest.asmVersion` **must** be set to the desired version
- `ASMRequest.authenticatorIndex` **must** be set to the target authenticator index

For an OpenSettings response, the following `ASMResponse` member(s) **must** have the following value(s). The remaining `ASMResponse` members **should** be omitted:

- `ASMResponse.statusCode` **must** have one of the following values:
 - `UAF_ASM_STATUS_OK`

4. Using ASM API

This section is non-normative.

In a typical implementation, the FIDO UAF Client will call `GetInfo` during initialization and obtain information about the authenticators. Once the information is obtained it will typically be used during FIDO UAF message processing to find a match for given FIDO UAF policy. Once a match is found the FIDO UAF Client will send the appropriate request (Register/Authenticate/Deregister...) to this ASM.

The FIDO UAF Client may use the information obtained from a `GetInfo` response to display relevant information about an authenticator to the user.

5. Using the ASM API on various platforms

This section is normative.

5.1 Android ASM Intent API

On Android systems FIDO UAF ASMs **may** be implemented as a separate APK-packaged application.

The FIDO UAF Client invokes ASM operations via Android Intents. All interactions between the FIDO UAF Client and an ASM on Android takes place through the following intent identifier:□

```
org.fidoalliance.intent.FIDO_OPERATION
```

To carry messages described in this document, an intent **must** also have its `type` attribute set to `application/fido.uaf_asm+json`.

ASMs **must** register that intent in their manifest file and implement a handler for it.□

FIDO UAF Clients **must** append an extra, `message`, containing a `String` representation of a `ASMRequest`, before invoking the intent.

FIDO UAF Clients **must** invoke ASMs by calling `startActivityForResult()`

FIDO UAF Clients **should** assume that ASMs will display an interface to the user in order to handle this intent, e.g. prompting the user to complete the verification□ ceremony. However, the ASM **should not** display any user interface when processing a `GetInfo` request.

After processing is complete the ASM will return the response intent as an argument to `onActivityResult()`. The response intent will have an extra, `message`, containing a `String` representation of a `ASMResponse`.

5.1.1 Discovering ASMs

FIDO UAF Clients can discover the ASMs available on the system by using `PackageManager.queryIntentActivities(Intent intent, int flags)` with the FIDO Intent described above to see if any activities are available.

A typical FIDO UAF Client will enumerate all ASM applications using this function and will invoke the `GetInfo` operation for each one discovered.

5.2 Windows ASM API

On Windows, an ASM is implemented in the form of a Dynamic Link Library (DLL). The following is an example `asmplugin.h` header file defining a Windows ASM API:□

EXAMPLE 1

```
/*! @file asm.h
*/

#ifndef __ASM_H__
#define __ASM_H__
#ifdef _WIN32
#define ASM_API __declspec(dllexport)
#endif

#ifdef _WIN32
#pragma warning ( disable : 4251 )
#endif
```

```

#define ASM_FUNC extern "C" ASM_API
#define ASM_NULL 0

/*! \brief Error codes returned by ASM Plugin API.
 * Authenticator specific error codes are returned in JSON form.
 * See JSON schemas for more details.
 */

enum asmResult_t
{
    Success = 0, /**< Success */
    Failure /**< Generic failure */
};

/*! \brief Generic structure containing JSON string in UTF-8
 * format.
 * This structure is used throughout functions to pass and receives
 * JSON data.
 */

struct asmJSONData_t
{
    int length; /**< JSON data length */
    char pData; /**< JSON data */
};

/*! \brief Enumeration event types for authenticators.
These events will be fired when an authenticator becomes
available (plugged) or unavailable (unplugged).
*/

enum asmEnumerationType_t
{
    Plugged = 0, /**< Indicates that authenticator Plugged to system */
    Unplugged /**< Indicates that authenticator Unplugged from system */
};

namespace ASM
{
    /*! \brief Callback listener.
    FIDO UAF Client must pass an object implementating this interface to
    Authenticator::Process function. This interface is used to provide
    ASM JSON based response data.*/
    class ICallback
    {
    public
        virtual ~ICallback() {}
        /**
        This function is called when ASM's response is ready.
        *
        @param response JSON based event data
        @param exchangeData must be provided by ASM if it needs some
        data back right after calling the callback function.
        The lifecycle of this parameter must be managed by ASM. ASM must
        allocate enough memory for getting the data back.
        */

        virtual void Callback(const asmJSONData_t &response,
            asmJSONData_t &exchangeData) = 0;
    };

    /*! \brief Authenticator Enumerator.
    FIDO UAF Client must provide an object implementing this
    interface. It will be invoked when a new authenticator is plugged or
    when an authenticator has been unplugged. */

    class IEnumerator
    {
    public
        virtual ~IEnumerator() {}
        /**
        This function is called when an authenticator is plugged or
        unplugged.

```

```

    * @param eventType event type (plugged/unplugged)
    * @param AuthenticatorInfo JSON based GetInfoResponse object
    */

    virtual void Notify(const asmEnumerationType_t eventType, const
        asmJSONData_t &AuthenticatorInfo) = 0;
};
}

/**
Initializes ASM plugin. This is the first function to be
called.
*
@param pEnumerationListener caller provided Enumerator
*/

ASM_FUNC asmResult_t asmInit(ASM::IEnumerator
    *pEnumerationListener);
/**
Process given JSON request and returns JSON response.
*
If the caller wants to execute a function defined in ASM JSON
schema then this is the function that must be called.
*
@param pInData input JSON data
@param pListener event listener for receiving events from ASM
*/
ASM_FUNC asmResult_t asmProcess(const asmJSONData_t *pInData,
    ASM::ICallback *pListener);
/**
Unitializes ASM plugin.
*
*/
ASM_FUNC asmResult_t asmUninit();
#endif // __ASMPLUGINH_

```

A Windows-based FIDO UAF Client **must** look for ASM DLLs in the following registry paths:

`HKCU\Software\FIDO\UAF\ASM`

`HKLM\Software\FIDO\UAF\ASM`

The FIDO UAF Client iterates over all keys under this path and looks for "path" field:□

`[HK*\Software\FIDO\UAF\ASM\<exampleASMName>]`

`"path"="<ABSOLUTE_PATH_TO_ASM>.dll"`

`path` **must** point to the absolute location of the ASM DLL.

6. Security and Privacy Guidelines

This section is normative.

ASM developers must carefully protect the FIDO UAF data they are working with. ASMs must follow these security guidelines:

- ASMs **must** implement a mechanism for isolating UAF credentials registered by two different FIDO UAF Clients from one another. One FIDO UAF Client **must not** have access to FIDO UAF credentials that have been registered via a different FIDO UAF Client. This prevents malware from exercising credentials associated with a legitimate FIDO Client.

- **NOTE**

ASMs must properly protect their sensitive data against malware using platform-provided isolation capabilities in order to follow the assumptions made in [FIDOSecRef]. Malware with root access to the system or direct physical attack on the device are out of scope for this requirement.

- **NOTE**

The following are examples for achieving this:

- If an ASM is bundled with a FIDO UAF Client, this isolation mechanism is already built-in.
- If the ASM and FIDO UAF Client are implemented by the same vendor, the vendor may implement proprietary mechanisms to bind its ASM exclusively to its own FIDO UAF Client.
- On some platforms ASMs and the FIDO UAF Clients may be assigned with a special privilege or permissions which regular applications don't have. ASMs built for such platforms may avoid supporting isolation of UAF credentials per FIDO UAF Clients since all FIDO UAF Clients will be considered equally trusted.

- An ASM designed specifically for bound authenticators **must** ensure that FIDO UAF credentials registered with one ASM cannot be accessed by another ASM. This is to prevent an application pretending to be an ASM from exercising legitimate UAF credentials.
 - Using a [KHAccessToken](#) offers such a mechanism.
- An ASMs must implement platform-provided security best practices for protecting UAF related stored data.
- ASMs **must not** store any sensitive FIDO UAF data in its local storage, except the following:
 - `CallerID`, `ASMToken`, `PersonaID`, `KeyID`, `KeyHandle`, `AppID`

- **NOTE**

An ASM, for example, must never store a username provided by a FIDO Server in its local storage in a form other than being decryptable exclusively by the authenticator.

- ASMs **should** ensure that applications cannot use silent authenticators for tracking purposes. ASMs implementing support for a silent authenticator **must** show, during every registration, a user interface which explains what a silent authenticator is, asking for the users consent for the registration. Also, it is

recommended that ASMs designed to support roaming silent authenticators either

- Run with a special permission/privilege on the system, or
- Have a built-in binding with the authenticator which ensures that other applications cannot directly communicate with the authenticator by bypassing this ASM.

6.1 KHAccessToken

KHAccessToken is an access control mechanism for protecting an authenticator's FIDO UAF credentials from unauthorized use. It is created by the ASM by mixing various sources of information together. Typically, a **KHAccessToken** contains the following four data items in it: **AppID**, **PersonaID**, **ASMToken** and **CallerID**.

AppID is provided by the FIDO Server and is contained in every FIDO UAF message.

PersonaID is obtained by the ASM from the operational environment. Typically a different **PersonaID** is assigned to every operating system user account.

ASMToken is a randomly generated secret which is maintained and protected by the ASM.

NOTE

In a typical implementation an ASM will randomly generate an **ASMToken** when it is launched the first time and will maintain this secret until the ASM is uninstalled.

CallerID is the ID the platform has assigned to the calling FIDO UAF Client (e.g. "bundle ID" for iOS). On different platforms the caller ID can be obtained differently.

NOTE

For example on Android platform ASM can use the hash of the caller's **apk-signing-cert**.

The ASM uses the **KHAccessToken** to establish a link between the ASM and the key handle that is created by authenticator on behalf of this ASM.

The ASM provides the **KHAccessToken** to the authenticator with every command which works with key handles.

NOTE

The following example describes how the ASM constructs and uses **KHAccessToken**.

- During a **Register** request
 - Append **AppID**
 - **KHAccessToken = AppID**
 - If a bound authenticator, append **ASMToken**, **PersonaID** and **CallerID**

- `KHAccessToken` = `ASMToken` | `PersonaID` | `CallerID`
- Hash `KHAccessToken`
 - Hash `KHAccessToken` using the authenticator's hashing algorithm. The reason of using authenticator specific hash function is to make sure of interoperability between ASMs. If interoperability is not required, an ASM can use any other secure hash function it wants.
 - `KHAccessToken=hash(KHAccessToken)`
- Provide `KHAccessToken` to the authenticator
- The authenticator puts the `KHAccessToken` into `RawKeyHandle` (see [UAFAuthnrCommands] for more details)
- During other commands which require `KHAccessToken` as input argument
 - The ASM computes `KHAccessToken` the same way as during the `Register` request and provides it to the authenticator along with other arguments.
 - The authenticator unwraps the provided key handle(s) and proceeds with the command only if `RawKeyHandle.KHAccessToken` is equal to the provided `KHAccessToken`.

Bound authenticators **must** support a mechanism for binding generated key handles to ASMs. The binding mechanism **must** have at least the same security characteristics as mechanism for protecting `KHAccessToken` described above. As a consequence it is **recommended** to securely derive `KHAccessToken` from `AppID`, `ASMToken`, `PersonaID` and the `CallerID`.

NOTE

It is recommended for roaming authenticators that the `KHAccessToken` contains only the `AppID` since otherwise users won't be able to use them on different machines (`PersonaID`, `ASMToken` and `CallerID` are platform specific). If the authenticator vendor decides to do that in order to address a specific use case, however, it is allowed.

Including `PersonaID` in the `KHAccessToken` is optional for all types of authenticators. However an authenticator designed for multi-user systems will likely have to support it.

6.2 Access Control for ASM APIs

The following table summarizes the access control requirements for each API call.

ASMs **must** implement the access control requirements defined below. ASM vendors **may** implement additional security mechanisms.

Terms used in the table:

- `NoAuth` -- no access control
- `CallerID` -- FIDO UAF Client's platform-assigned ID is verified
- `UserVerify` -- user must be explicitly verification
- `KeyIDList` -- must be known to the caller

Commands	First-factor bound authenticator	Second-factor bound authenticator	First-factor roaming authenticator	Second-factor roaming authenticator
GetInfo	NoAuth	NoAuth	NoAuth	NoAuth
OpenSettings	NoAuth	NoAuth	NoAuth	NoAuth
Register	UserVerify	UserVerify	UserVerify	UserVerify
Authenticate	UserVerify AppID CallerID PersonalID	UserVerify AppID KeyIDList CallerID PersonalID	UserVerify AppID	UserVerify AppID KeyIDList
GetRegistrations*	CallerID PersonalID	CallerID PersonalID	X	X
Deregister	AppID KeyID PersonalID CallerID	AppID KeyID PersonalID CallerID	AppID KeyID	AppID KeyID

A. References

A.1 Normative references

[ECMA-262]

ECMAScript Language Specification, Edition 5.1 June 2011. URL: <http://www.ecma-international.org/publications/standards/Ecma-262.htm>

[FIDOGlossary]

R. Lindemann, D. Baghdasaryan, B. Hill, J. Hodges, *FIDO Technical Glossary*. FIDO Alliance Proposed Standard. URLs:
HTML: [fido-glossary-v1.0-ps-20141208.html](http://www.fidoalliance.org/specifications/fido-glossary-v1.0-ps-20141208.html)
PDF: [fido-glossary-v1.0-ps-20141208.pdf](http://www.fidoalliance.org/specifications/fido-glossary-v1.0-ps-20141208.pdf)

[RFC2119]

S. Bradner. *Key words for use in RFCs to Indicate Requirement Levels* March 1997. Best Current Practice. URL: <https://tools.ietf.org/html/rfc2119>

[RFC4648]

S. Josefsson, *The Base16, Base32, and Base64 Data Encodings (RFC 4648)*, IETF, October 2006, URL: <http://www.ietf.org/rfc/rfc4648.txt>

[UAFAuthnrCommands]

D. Baghdasaryan, J. Kemp, R. Lindemann, R. Sasson, B. Hill, *FIDO UAF Authenticator Commands v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: [fido-uaf-authnr-cmds-v1.0-ps-20141208.html](http://www.fidoalliance.org/specifications/fido-uaf-authnr-cmds-v1.0-ps-20141208.html)
PDF: [fido-uaf-authnr-cmds-v1.0-ps-20141208.pdf](http://www.fidoalliance.org/specifications/fido-uaf-authnr-cmds-v1.0-ps-20141208.pdf)

[UAFAuthnrMetadata]

B. Hill, D. Baghdasaryan, J. Kemp, *FIDO UAF Authenticator Metadata Statements v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: [fido-uaf-authnr-metadata-v1.0-ps-20141208.html](http://www.fidoalliance.org/specifications/fido-uaf-authnr-metadata-v1.0-ps-20141208.html)
PDF: [fido-uaf-authnr-metadata-v1.0-ps-20141208.pdf](http://www.fidoalliance.org/specifications/fido-uaf-authnr-metadata-v1.0-ps-20141208.pdf)

[UAFProtocol]

R. Lindemann, D. Baghdasaryan, E. Tiffany, D. Balfanz, B. Hill, J. Hodges, *FIDO UAF Protocol Specification v1.0*. FIDO Alliance Proposed Standard. URLs:
HTML: [fido-uaf-protocol-v1.0-ps-20141208.html](http://www.fidoalliance.org/specifications/fido-uaf-protocol-v1.0-ps-20141208.html)
PDF: [fido-uaf-protocol-v1.0-ps-20141208.pdf](http://www.fidoalliance.org/specifications/fido-uaf-protocol-v1.0-ps-20141208.pdf)

[UAFRegistry]

R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO UAF Registry of Predefined*

Values. FIDO Alliance Proposed Standard. URLs:

HTML: fido-uaf-reg-v1.0-ps-20141208.html

PDF: fido-uaf-reg-v1.0-ps-20141208.pdf

[WebIDL-ED]

Cameron McCormack, [Web IDL](http://www.w3.org/TR/WebIDL/), W3C. Editor's Draft 13 November 2014. URL:

<http://heycam.github.io/webidl/>

A.2 Informative references

[ECMA-404]

. *The JSON Data Interchange Format*. 1 October 2013. Standard. URL:

<http://www.ecma-international.org/publications/files/ECMA-ST/ECMA-404.pdf>

[FIDOSecRef]

R. Lindemann, D. Baghdasaryan, B. Hill, *FIDO Security Reference*. FIDO Alliance Proposed Standard. URLs:

HTML: fido-security-ref-v1.0-ps-20141208.html

PDF: fido-security-ref-v1.0-ps-20141208.pdf

[RFC2397]

L. Masinter. *The "data" URL scheme*. August 1998. Proposed Standard. URL:

<https://tools.ietf.org/html/rfc2397>

[UAFAppAPIAndTransport]

B. Hill, D. Baghdasaryan, B. Blanke, *FIDO UAF Application API and Transport Binding Specification*. FIDO Alliance Proposed Standard. URLs:

HTML: fido-uaf-client-api-transport-v1.0-ps-20141208.html

PDF: fido-uaf-client-api-transport-v1.0-ps-20141208.pdf

[WebIDL]

Cameron McCormack. *Web IDL*. 19 April 2012. W3C Candidate

Recommendation. URL: <http://www.w3.org/TR/WebIDL/>