

FIDO Authenticator Security and Privacy Requirements

FIDO Alliance Review Draft 06 May 2026

This version:

<https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-security-requirements-v1.7-rd-20260506.html>

Previous version:

<https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-security-requirements-v1.6-fd-20250312.html>

Editors:

[Beatrice Peirani, Thales](#)
[Johan Verrept, OneSpan](#)

Contributors:

[Laurence Lundblade, NTT Docomo](#)
[Rolf Lindemann, Nok Nok Labs, Inc.](#)
[Dr. Joshua E. Hill, InfoGard Laboratories](#)
[Douglas Biggs, InfoGard Laboratories](#)
[Roland Atoui, The FIDO Alliance](#)
[Meagan Karlsson, The FIDO Alliance](#)
[Adam Powers, The FIDO Alliance](#)
[Carolina Lavatelli, Internet of Trust](#)
[Nitin Sarangdhar, Intel](#)
[Marcus Janke, Infineon](#)

Copyright © 2013-2026 [FIDO Alliance](#) All Rights Reserved.

Abstract

This documents defines the security and privacy requirements for FIDO Authenticators.

Status of This Document

This section describes the status of this document at the time of its publication. Other documents may supersede this document. The most recent version of this document can be found on the [FIDO Alliance Website](#) at <https://fidoalliance.org>.

This document was published by the [FIDO Alliance](#) as a Review Draft. This document is intended to become a FIDO Alliance Proposed Standard. If you wish to make comments regarding this document, please [Contact Us](#). All comments are welcome.

This is a Review Draft Specification and is not intended to be a basis for any implementations as the Specification may change. Permission is hereby granted to use the Specification solely for the purpose of reviewing the Specification. No rights are granted to prepare derivative works of this Specification. Entities seeking permission to reproduce portions of this Specification for other uses must contact the FIDO Alliance to determine whether an appropriate license for such use is available.

Implementation of certain elements of this Requirements Document may require licenses under third party intellectual property rights, including without limitation, patent rights. The FIDO Alliance, Inc. and its Members and any other contributors to the Requirements Document are not, and shall not be held, responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.

THIS FIDO ALLIANCE REQUIREMENTS DOCUMENT IS PROVIDED "AS IS" AND WITHOUT ANY WARRANTY OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ANY EXPRESS OR IMPLIED WARRANTY OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Table of Contents

- 1. [Introduction](#)
 - 1.1 [Version](#)
 - 1.2 [Key Words](#)
 - 1.3 [Definitions and Acronyms](#)
 - 1.3.1 [Definitions](#)
 - 1.3.2 [Acronyms](#)
 - 1.4 [How to Read this Document](#)
 - 1.5 [FIDO Specifications](#)
 - 1.6 [Security Measures](#)
 - 1.7 [Testing Style](#)
 - 1.7.1 [Test Assurance Modes](#)
 - 1.7.2 [Test Procedures - Key Words](#)
- 2. [Security and Certification](#)
 - 2.1 [Security levels](#)
 - 2.1.1 [Enhanced software based authenticator \(L1+\)](#)
 - 2.1.2 [Authenticator Hardware Examples](#)
 - 2.2 [Certification and Companion Programs](#)
 - 2.2.1 [Specific calibration for L1+](#)
 - 2.3 [Documents for Certification](#)
- 3. [Requirements](#)
 - 3.1 [Authenticator definition Derived Requirements](#)
 - 3.2 [Key Management and Authenticator Security Parameters](#)
 - 3.2.1 [Documentation](#)

- 3.2.2 Random Number Generation
- 3.2.3 Signature Counters
- 3.2.4 Backup and Syncing
- 3.3 Authenticator's Test for User Presence and User Verification
- 3.4 Privacy
- 3.5 Physical Security, Side Channel Attack Resistance and Fault Injection Resistance
- 3.6 Attestation
- 3.7 Operating Environment
- 3.8 Self-Tests and Firmware Updates
- 3.9 Manufacturing and Development
- 3.10 Operational Guidance
- A. Differences between versions
- B. Old version of Table 2.2
- C. References
 - C.1 Normative references
 - C.2 Informative references

1. Introduction

1.1 Version

This document version (DV) is DV 1.7. Associated documents to this document include FIDO Security Laboratory Accreditation Policy [FIDOLabPolicy] and FIDO Authenticator Certification Policy [FIDOAuthenticatorCertificationPolicy].

1.2 Key Words

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

In summary:

1. "MUST", "REQUIRED", or "SHALL", mean that the definition is an absolute requirement of this document.
2. "MUST NOT", or "SHALL NOT", mean that the definition is an absolute prohibition of this document.
3. "SHOULD", or "RECOMMENDED", mean that there may exist valid reasons in particular circumstances to ignore a particular item, but the full implications **MUST** be understood are carefully weighed before choosing a different course.
4. "SHOULD NOT", or "NOT RECOMMENDED" mean that there may exist valid reasons in particular circumstances when the particular behavior is acceptable or even useful, but the full implications **SHOULD** be understood and the case carefully weighed before implementing any behavior described with this label.
5. "MAY", or "OPTIONAL", mean that an item is truly optional.

The terms "vendor" and "implementer" are used interchangeably in FIDO security certification documents. The term "implementer" is preferred.

1.3 Definitions and Acronyms

1.3.1 Definitions

- **Anti-emulation:** a technique to protect from code emulation, where a binary code is fed to a virtual/software processing unit rather than a physical processor. The virtual unit mimics what a physical one would do, though at a much slower speed.
NOTE Emulation is a powerful approach as it lets attackers do cross-platform analysis: for example, an ARM emulator can run on an x86-64 platform. The virtual unit can be turned into an analysis tool, providing an in-depth view of the behavior of a binary and the possibility to analyze, react or interfere with it while it is being processed. By placing the virtual processor in a chosen context, it is even possible to emulate a part of the whole binary, letting an attacker focus on very specific aspects of its target. Anti-emulation typically relies on discrepancies between a physical processor and its emulator to detect whether a code is run on an actual device or not. For example: execution speed is much slower on an emulator an emulator could implement only a subset of the instructions available on a real processor a side-effect of the execution of an instruction could differ slightly between the two
- **Anti-tracing:** a software protection technique to prevent dynamic information collection from a target application through a tool such as a debugger, an emulator or a dynamic binary instrumentation framework.
- **Authenticator:** a set hardware and software that implements the Authenticator portion of the FIDO UAF, FIDO U2F, or FIDO2 protocols.
- **Authenticator Application:** the entity that (a) is provided by the Authenticator Vendor, and (b) combines with the underlying operating environment (hardware and firmware) in a way that results in a FIDO Authenticator.
- **Bucketing Computation Analysis (BCA):** a chosen-plaintext attack on block-ciphers such as DES or AES. It detects a correct key guess by checking if two sets of intermediate values have an empty intersection, as an expected result of a choice of messages for a given key hypothesis. It is an attack that requires access to intermediate values during an execution, which is suitable in the whitebox context.
NOTE See https://www.cosade.org/presentations/another_look.pdf
- **Configuration item:** all the objects managed by the configuration management system during the product development. These may be either parts of the product (e.g. source code) or objects related to the development of the product like guidance documents, development tools, tests results, etc.
- **Consumer Profile:** applicable by default, the Authenticator is intended to be used by consumers and sold on the open market. In [Consumer Profile](#), [Enterprise Attestation](#) is not be supported.
- **Dynamic Binary Instrumentation framework (DBI):** a tool that lets you analyze into detail the behavior of a target program. Initially designed for performance or memory leak detection, this kind of feature also is of great interest for side-channel analysis (through data collection) or fault injection techniques (through dynamic data or control flow modification).
NOTE Frida (<https://www.frida.re/>) and Triton (<https://triton.quarkslab.com/>) are DBIs that are security-oriented, while Pin (<https://software.intel.com/en-us/articles/pin-a-dynamic-binary-instrumentation-tool>), Valgrind (<http://valgrind.org/docs/valgrind2007.pdf>) or DynamoRIO (<https://www.dynamorio.org/>) have plugins meant for security analysis.
- **Enterprise:** some form of organization, often a business entity.
- **Enterprise Attestation:** a per-authenticator unique attestation, which may be configured to support either of both:
 - **vendor-facilitated enterprise attestation (also called EA mode 1)**
In this case, the Authenticator Vendor pre-configures into the Authenticator, upon request of the Enterprise, a (non-updateable) list of RP IDs, for those RPs allowed to request enterprise attestation.
 - **platform-managed enterprise attestation(also called EA mode 2)**
In this case, the platform/browser, managed by the Enterprise, knows which RPs are allowed to request enterprise attestation, e.g. through a local policy lookup.
- **Enterprise Profile:** it applies if the Authenticator is intended for employees of an enterprise and the authenticator is sold directly to the Enterprise. It allows the [Enterprise Attestation](#) option to be enabled on a FIDO Authenticator compliant with CTAP 2.1 ([FIDOCTAP](#)). Enterprise Attestation allows Enterprises to uniquely identify Authenticators upon registration with their corporate systems. In the [Enterprise Profile](#), [Enterprise Attestation](#) **MAY** be supported.
- **Factory reset:** a function allowing the user resetting the Authenticator to the original (factory) state, i.e. deleting all user specific information.
- **Key protection type:** SW, HW, TEE, SE or remote, as described in [FIDORegistry](#). Key protection means here where the key is stored and manipulated.
- **Operating Environment:** a set of hardware and software components (e.g. hardware processing unit, physical memory, etc.) that provides facilities (e.g. Computing, Memory Management, input/output, etc.), necessary to support running of applications.

- **Profile:** a context for certification, assigning an intended user environment for the authenticator. The current version of this document defines Consumer Profile and Enterprise Profile.
- **Secure boot (or verified boot):** a process that ensures that the device boots an unmodified, authorized image.
- **Zero Difference Enumeration attack (ZDE):** a chosen-plaintext attack on AES, which detects a correct key guess by minimizing the number of differences in the algorithm state for a given key hypothesis and carefully chosen messages. It is an attack that requires access to intermediate values during an execution, which is suitable in the whitebox context.
NOTE See <https://eprint.iacr.org/2017/183.pdf>
- **Security property (or security service, as defined by ISO/IEC 7498-2 [ISOIEC-7498-2]):** an answer to a security requirement, including data confidentiality, data integrity, authentication, non-repudiation, access control and availability.

1.3.2 Acronyms

- **AES:** Advanced Encryption Standard (cryptographic algorithm)
- **AROE:** Allowed ROE
- **ASM:** Authenticator Specific Module
- **ASP:** Authenticator Security Parameters
- **CC:** Common Criteria
- **CTAP:** Client To Authenticator Protocol
- **DCA:** Differential Computation Analysis
- **DFA:** Differential Fault Analysis
- **ECC:** Elliptic Curve Cryptography
- **ECDAA:** Elliptic Curve based Direct Anonymous Attestation (cryptographic algorithm)
- **FAR:** False Acceptance Rate
- **GDPR:** General Data Privacy Regulation (regulation on data protection and privacy in the European Union)
- **HLOS:** High-Level Operating System
- **HW:** Hardware
- **KDF:** Key Derivation Function
- **PIN:** Personal Identification Number
- **PP:** Protection Profile
- **ROE:** Restricted Operating Environment
- **RP:** Relying Party
- **RP ID:** Relying Party Identifier
- **RNG:** Random Number Generator
- **RSA:** Rivest Shamir Adleman (cryptographic algorithm)
- **SAR:** Security Assurance Requirements (CC context)
- **SE:** Secure Element
- **SFR:** Security Functional Requirements (CC context)
- **SoC:** System on Chip
- **SW:** Software
- **TEE:** Trusted Execution Environment
- **TOE:** Target Of Evaluation
- **TUI:** Trusted User Interface
- **UV:** User Verification
- **UVM:** User Verification Method
- **WBC:** White Box Cryptography

1.4 How to Read this Document

This section is non-normative.

This document is a combination of FIDO Alliance Security and Privacy Requirements, Test Procedures, and Mapping Table (companion program) and Vendor Questionnaires. Each Requirement has the following elements:

- **Requirement Number:** Unique identifier for each Requirement
- **Specification:** The FIDO Specification for which this Requirement is applicable. For example, UAF, U2F, FIDO2, or UAF + U2F + FIDO2 (meaning it is applicable to UAF, U2F, and FIDO2)
- **Profile:** The profile for which this Requirement is applicable. Each requirement is assigned one or more profiles. For example, Consumer, Enterprise, or Consumer + Enterprise (meaning it is applicable to Consumer and Enterprise). A requirements is valid for that profile if it is tagged with that profile.
- **Testing Style:** The testing style of the Security Requirement, explained in the [Testing Style](#) section below.
- **Requirement Level:** The Security Level to which the Requirement applies.

All requirements apply to all **Security Levels** unless otherwise noted. If a requirement is marked "L<n> and higher" then it applies to level L<n> and all levels above L<n> and not to levels below L<n>.

- **Security Measures:** The Security Measures from the FIDO Security References [FIDOSecRef](#). These are mechanisms to implement in order to satisfy a Security Requirement.
- **Requirement:** The text of the Security Requirement - a description of necessary conditions to enforce security. It provides an exact description of what is to be evaluated and could be applied on all the life-cycle stages of the Authenticator.
- **Note:** An optional section that contains informative text to support the Requirement.
- **Relation to Companion Program:** This is for L3/L3+ only. The text is extracted from the mapping table and describes how the Requirement can be met by a particular Companion Program. Whether a requirement can be met through a Companion Program or not varies by Requirement, Security Level and the Companion Program. Companion Programs are explained in the [Companion Programs](#) section below.
- **Calibration:** The Calibration box reflects the required strength of the protection measures to meet the Requirement. The higher security levels generally require greater strength and more thorough evaluation. For example, for Common Criteria based programs higher security levels calibrate by require a higher attack potential be achieved.
- **Vendor Questionnaire:** This is for L1, L1+ and L2 only. The Vendor Questionnaire boxes reflect the information the Vendor must provide to prove the Requirement is met prior to the Security Evaluation. The Vendor shall complete the Vendor Questionnaire that corresponds to the Level of Authenticator Certification they are seeking.
- **Test Procedure:** The Test Procedure boxes are divided by Level, and describes how the Authenticator is to be evaluated. More specifically, it describes the actions the Test Proctor (e.g., for L1), or the Accredited Security Laboratory (e.g., for L2 and higher) must complete during the Security Evaluation to verify the Requirement is met. The Test Procedure will be followed that corresponds to the Level of Authenticator Certification indicated by the Vendor.
 - **Test Assurance Mode:** Each Test Procedure includes a Test Assurance Mode to provide additional clarification on how the Test Procedure will be performed. The Assurance Modes are explained in the [Test Assurance Modes](#) section below.

The following table is an example of the Requirement structure within this document:

No.	Requirement	Security Measures
[Requirement Number]	[Specification]; [Profile]; [Testing Style]; [Level]	
	Requirement text.	
	NOTE Note text.	
	Relation to Companion Program [Level] [Companion Program]: Relation to Companion Program text.	
	Calibration Calibration text.	[Security Measures]
	[Level] Vendor Questionnaire Vendor Questionnaire text.	
	[Level] Test Procedure {Test Assurance Mode} Test Procedure text.	
	VQ TP L1 L2 L2+ L3 L3+	

Example Requirement

1.5 FIDO Specifications

Some requirements are prefaced by "(UAF)", "(U2F)", or "(FIDO2)". These are applicability statements indicating that the requirement applies only to the UAF, U2F, or FIDO2 protocol families.

For requirements that relate to normative requirements of the UAF, U2F, or FIDO2 specifications, a reference is included citing the relevant section of the specifications. These references are included in square brackets, for example "[U2FRawMsgs], [Section 5.1]" refers to the U2F Authenticator specification, section 5.1.

1.6 Security Measures

All of the requirements end with a reference to the **security measures** that are supported by the requirement in question. These references are included within parentheses, for example "(SM-2)". The security measure references are described in the the FIDO Security Reference document [FIDOSecRef].

1.7 Testing Style

Each requirement is also tagged with the testing style.

The following testing styles are included in this document:

- Documentation and Definition Requirements (**DaD**): These requirements are associated with the existence of documentation, thus are easy to confirm through simple checks.
- Generate and Verify Rationale Requirements (**GaVR**): These requirements are divided into three subtypes:
 - GaVR-1**: Requirement that is nearly transparently verifiable, but which are expected to have the possibility of significant per-Authenticator variation.
 - GaVR-2**: Requirement that pertains to disallowed functionality or functionality that can only occur in proscribed situations.
 - GaVR-3**: Requirement where tester knowledge, skill and experience are significant factors in test efficacy.
- Transparently Verifiable Functional requirements (**TVFR**): These requirements are expected to be easy to confirm in almost all Authenticator designs, but there is some functional requirement to be verified.

1.7.1 Test Assurance Modes

Because GaVR and TVFR relate to functional requirements, there are different **test assurance modes** that we can seek depending on the importance of the requirement in question. These are as follows:

- A0**: The vendor asserts compliance to the requirement.
 - Guidance: An **assertion of compliance** is done through demonstration of the requirement during the Conformance Self-Validation or Interoperability Testing phases of FIDO Functional Certification. No Additional documentation is required.
- A1**: The FIDO Security Secretariat confirms that there is a sufficient rationale that describes how the requirement is fulfilled.
 - Guidance: This **rationale** can be a detailed written description, architectural diagrams, a specially constructed document that addresses this particular requirement, or can be one or more existing design documents which, together, convince the tester that the requirement is fulfilled.
- A2**: In addition to the testing for A0, the tester (FIDO Accredited Security Laboratory) additionally confirms that there is design documentation that describes how the requirement is fulfilled.
- A3**: In addition to the testing for A2, the tester confirms that the Authenticator satisfies the requirement by targeted review of the implementation (by source / HDL / schematic code review).
 - Guidance: If this requirement has been verified as part of a separate FIPS 140-2 or Common Criteria validation effort for the Authenticator or one of its subcomponents, this verification can be used to fulfill the A3 assurance mode tests.
- A4**: In addition to the testing for A3, the tester confirms that the Authenticator satisfies the requirement by exercising the Authenticator (through operational testing).

1.7.2 Test Procedures - Key Words

- Review**: This is a high-level check to confirm that desired data or rationale is present. It is often followed by a verification task (see **verify**) to ensure the evidence meets the requirement. The reporting for this style of procedural verb is simple assertion and a reference to the document/section that satisfied the review.
- Verify**: This is a more in-depth verification and/or analysis performed by the tester. The reporting for this style of procedural verb is more extensive, and requires that the tester outlines the steps and rationale used in the task.
- Conduct**: The tester performs either some review procedure that was supplied by the vendor or a vulnerability assessment and a penetration testing. Note that vulnerability assessment and penetration testing **SHALL** follow the style of the relevant Companion Program. The tester **MUST** retain evidence that these procedures were followed, and **SHOULD** provide a high-level summary of the procedure and its results within the report.
- Execute**: The tester runs a procedure which could be either a defined action or a sample test documented by the vendor. The tester **MUST** retain evidence of this procedure and **SHOULD** provide a high-level summary of the action and its results within the report.

2. Security and Certification

This section is normative.

2.1 Security levels

2.1.1 Enhanced software based authenticator (L1+)

At L1+, the Authenticator Application executes in an operating environment it has no control, that can be compromised and which cannot be a priori trusted. The Authenticator Application cannot solely rely on hardware security features of the operating environment. All security features are provided by the Authenticator Application itself. The following figure gives a high level view of architecture for L1+.

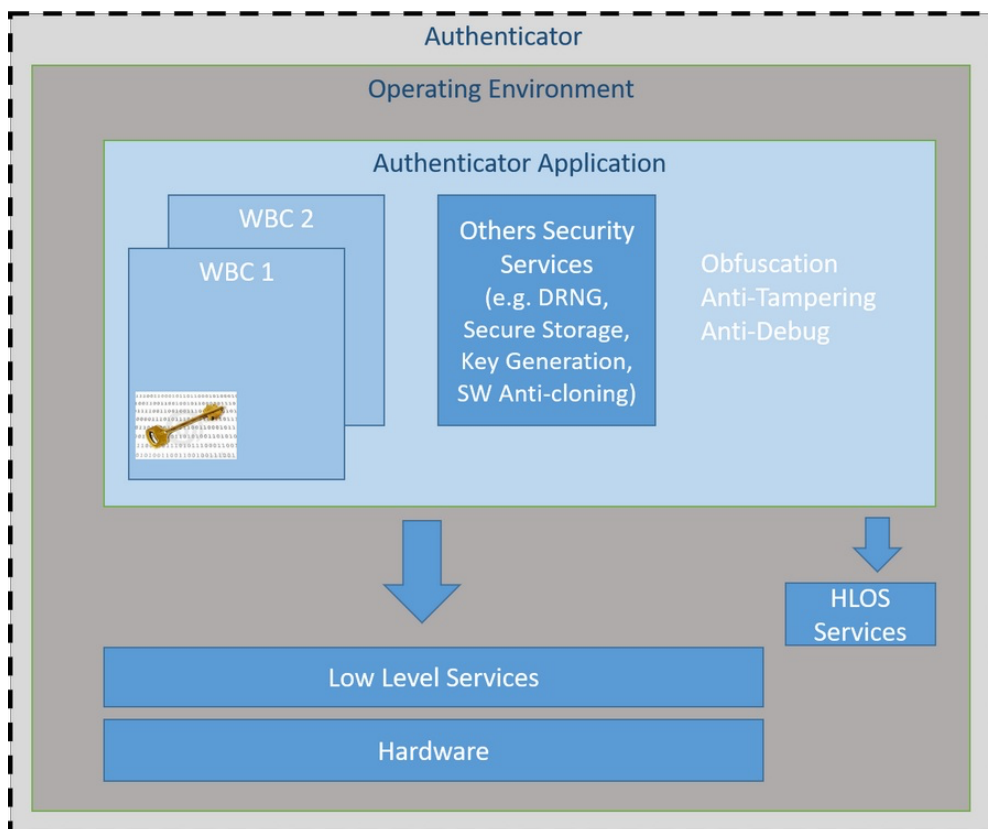


Fig. 1 Typical High Level Architecture of a Level 1+ Authenticator Application

There are several tools available for software protection. ETSI CYBER TR 103 642 [CYBER] provides a list of such tools, with description of attacks in a white box model. **In this model, software attacks (including side-channel and fault attacks) are the most straightforward means.** A detailed description of the tools, including white box crypto and code and data protection (obfuscation, anti-tampering, anti-debug, ...) can be found in [CYBER]. The use of these tools is not mandatory but it is unlikely that the Authenticator Application can achieve the targeted security level without their use.

The following terms are used in this document and their definition can be found in section 3.1 of [CYBER]:

- obfuscation
- anti-tampering
- anti-debug
- anti-reversing
- anti-cloning
- anti-xxx (see section 5.3.2 in [CYBER]) includes the four previous ones
- whitebox crypto (or WBC)
- differential computation analysis (or DCA)
- differential fault analysis (or DFA)
- device binding

2.1.2 Authenticator Hardware Examples

This section is non-normative.

These examples are solely illustrative and demonstrative. No information in this section may be used as justification for requirements met.

The relation between FIDO certification levels and the attacks defended against is roughly summarized in the following table.

FIDO Security Level	HW & SW Requirements	Defends against	Implementation examples
L1	Any device HW or SW	Unprivileged client applications and data cloning but only assuming execution environment is genuine.	L1 is the by-default security level required for any functional certification.

FIDO Security Level	HW & SW Requirements	Defends against	Implementation examples
L1+	Authenticator Application only implementation with security focus (state-of-the-art software protection)	Temporary privileged escalation on HLOS (others applications and some root exploits)	As defined and certified by FIDO: • Use of whitebox crypto (WBC) for handling of secrets • Use of software protection techniques (e.g. anti-tampering) for protecting Authenticator usage
L2	Authenticator implementation supported by a Restricted Operating Environment (ROE). ROE is supporting segregation protection but is sharing computational resources with the HLOS (same CPU, same memory, same cache ...). A list of Allowed ROE (AROE) is published in [FIDORestrictedOperatingEnv].	Permanent privilege escalation on HLOS including kernel level exploits (e.g. root exploit)	Within the list of Allowed ROE: - Security Key (BLE/NFC/USB) - TEE based on ARM Trustzone - TEE Based on Intel VT HW ...
L2+	ROE has access to fully isolated resources (segregation enforced by a hardware CPU mechanism or by usage of distinct computational resource)	Permanent privilege escalation on HLOS including hypervisor level exploits	TBD (no Companion Program is available for this level)
L3	Authenticator implementation supported by a ROE with security resistance against physical attacks	Attacker with physical access to the device HW but with non-invasive attacks (probing, emanations analysis, limited fault injections)	GlobalPlatform certified TEE (L3 TEE PP Companion Program) CC certified Secure Element (L3 IC PP or 3S in SoC PP or Java Card PP Companion Program)
L3+	Authenticator implementation supported by a ROE or standalone with security resistance against advanced physical attacks	Attacker with physical access to the device HW but with invasive attacks (tampering, advanced emanations analysis and fault injections)	CC certified Secure Element (L3+ IC PP or 3S in SoC PP or Java Card PP Companion Program)

Table 2.1: Sample Device Hardware and Software Requirements Defence Profile

The following table contains examples of underlying platform on which an authenticator executes to illustrate the possible security levels to be targeted for a FIDO certification.

The typical FIDO certification levels given are again only illustrative. The actual certification level granted depends on many things other than what is listed in this table. The authenticator must meet all the FIDO security and privacy requirements for the given level.

Case#	Examples	(May target) FIDO security level	Companion Program
A	Mobile phone with HW key store	L1	NA
B	IoT device 100MHz 32-bit CPU accessing DIMM socket memory. Low speed memory socket interface	L2+	No Companion Program for L2+ is available at the moment.
C	Laptop with high performance 2GHz CPU accessing DDR4 memory in a SO-DIMM. High speed memory socket interface	L2 by default. L2+ or L3 if there is an existing certification.	No Companion Program for L2+ is available at the moment. FIDO proposes 3 Companion Programs, based on Common Criteria, to target FIDO L3 security level.
D	Laptop with high performance 2GHz CPU accessing DDR4 memory in a SO-DIMM with buried trace	L2 by default. L2+ or L3 if there is an existing certification.	No Companion Program for L2+ is available at the moment. FIDO proposes 3 Companion Programs, based on Common Criteria, to target FIDO L3 security level.
E	Mobile phone SoC with 2GHz CPU with PoP memory	L2 by default. L2+ or L3 if there is an existing certification.	No Companion Program for L2+ is available at the moment. FIDO proposes 3 Companion Programs, based on Common Criteria, to target FIDO L3 security level.
F	Mobile phone SoC with 2GHz CPU with memory and CPU die in the same package	L2 by default. L2+ or L3 if there is an existing certification.	No Companion Program for L2+ is available at the moment. FIDO proposes 3 Companion Programs, based on Common Criteria, to target FIDO L3 security level.

Case#	Examples	(May target) FIDO security level	Companion Program
G	IoT device 32-bit 100MHz CPU with memory and CPU on the same die	L2 by default. L2+ if there is an existing certification.	No Companion Program for L2+ is available at the moment.
H	SoC built on a CC-certified TEE	L3	FIDO proposes a dedicated Companion Program based on GlobalPlatform, with security level L3.
I	SoC with CPU with strong inline memory encryption and integrity protection HW	L2 by default. L3/L3+ if there is an existing certification.	FIDO proposes 3 Companion Programs, based on Common Criteria, to target FIDO L3/L3+ security levels, and in particular a dedicated one for SoC, the 3S on SoC PP.
J	Smart Card or Secure Element. Memory and CPU on the same die with hardware countermeasures	L2 by default. L3/L3+ if there is an existing certification.	FIDO proposes 3 dedicated Companion Programs based on CC for SE devices, targeting L3 or L3+.

Table 2.2: Examples of underlying platforms used by FIDO Authenticators

2.2 Certification and Companion Programs

The FIDO Alliance is the issuer of FIDO certifications. All vendors receiving certification must go through a process with the FIDO Alliance including paying a fee to the FIDO Alliance. At all levels the authenticator vendor must fill out a detailed vendor questionnaire and provide supporting documents. At L1, certification is through design document review by the FIDO Alliance Security Certification Secretariat. No lab is involved. For all except L1, the authenticator vendor must engage a FIDO-accredited lab. At L2, the security lab performs only a comprehensive design document review. At L1+, L2+, L3 and L3+ the lab performs a deeper evaluation including penetration testing and sometimes source code review.

To qualify for Certification, an Authenticator needs to fulfill all Security and Privacy Requirements (this document), depending on the targeted security level, and more generally be compliant with the set of documents listed in Table 1.

Companion Programs make use of Certification Programs independent from FIDO with which FIDO relies on to offer joint FIDO Certification Programs to reduce the certification burden on Vendors. In this version, Companion Programs are relevant to certification levels 3 and 3+. All vendors targeting L3 or L3+ certification **MUST** provide responses to cover the FIDO Authenticator Security and Privacy Requirements using a mapping table including supported Companion Programs. This mapping **SHOULD** be based on [FIDO-SR-Mapping-Table] provided by FIDO.

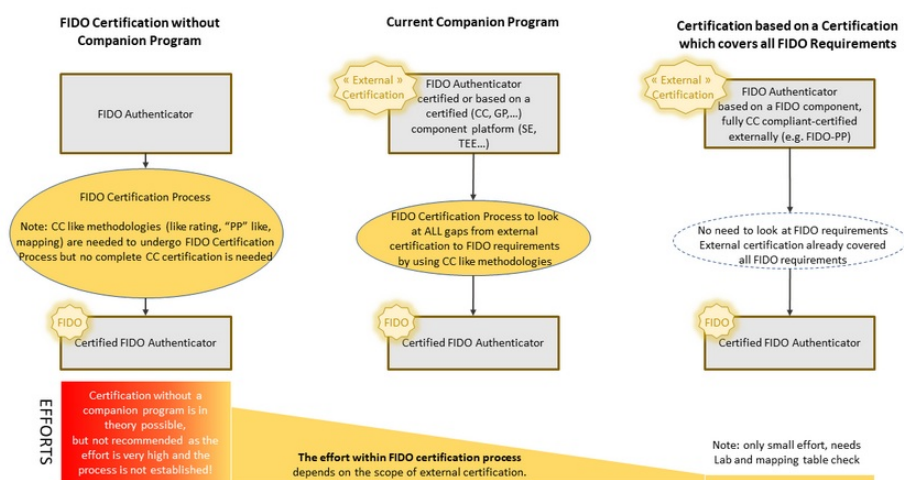


Fig. 2 Scenarios for FIDO L3/L3+ certification and their efforts

There is no Companion Program for certification level 1+. FIDO has developed a methodology for evaluation of a software authenticator protected using software techniques such as white box cryptography. This method is based on a combination of other related industry methods such as [CEMV3-1R5], [AttackPotentialSmartcards] and Annex A of [TEE-PP] but adapted to software specificities [1plus-Eval].

In the Companion Program boxes, the term **NOT COVERED** means the corresponding FIDO requirement is not covered by the PP and needs to be provided by the Authenticator Application. In addition, this requirement needs to be expressed in the Security Target and verified as part of the FIDO evaluation by the Lab.

The terms **OPTIONALLY COVERED** and **PARTIALLY COVERED** may also be used and are detailed in the boxes.

NOTE

This table is provided only as a guidance document for both vendors and labs to simplify evidence writing and evaluation tasks. This mapping table does not add or replace any FIDO Authenticator Security or Privacy Requirements. This version of the table translates FIDO security and privacy requirements into Common Criteria (CC) Security Functional Requirements (SFR) and Security Assurance Requirements (SAR) and maps these to either the Java Card Open Configuration Protection Profile (PP) [JCAPP], 3S in SoC PP [PP-0117], Security IC Platform PP [PP0084] or GP TEE PP [TEE-PP]. FIDO U2F Authenticator PP [U2FPP] is kept for legacy reasons only in the mapping table, but is not reflected in this document.

NOTE

This version of the FIDO Security and Privacy Requirements accepts Common Criteria (for L3 and L3+) and the GlobalPlatform TEE Protection Profile (for L3). Future FIDO Companion Programs may cover certifications endorsed by the security industry such as FIPS 140-3, EMVCo and more.

2.2.1 Specific calibration for L1+

Starting from Common Criteria and its Common Methodology for Information Technology Security Evaluation [ISO/IEC-18045], which is the default applicable method to all Common Criteria certified products or systems, and inspiring from existing recognized exceptions to it, specific to a particular domain (e.g. JIL Smart Card [AttackPotentialSmartcards] or GlobalPlatform Trusted Execution Environment [TEE-EM]), the method has been adapted to software products specificities, where not all software instances are identical, where software attacks are multi-steps and where the environment has some influence. The calibration for L1+ thus deviates from the calibration of the other (higher) levels and is based on this new method, described in [L1plus-Eval].

The security requirement is evaluated by penetration testing, conducted by an Accredited Security Laboratory (mixing reverse engineering, side-channel and crypto skills), in a restricted time period (i.e. carried out in 40 man days, within a calendar period of 10 weeks).

The threat model is the white-box model. The analysis will determine the effectiveness of the FIDO security requirements proposed by the product.

The vendor will provide to the Lab for testing:

1. the binary code (for a given platform, iOS or Android) of the Authenticator Application,
2. or a demo application (in case of a SDK certification) with an integration guide describing the security requirements to be fulfilled when integrating the SDK to the final application

The evaluation will try at least (but not limited) to reverse engineer and/or modify the Authenticator Application code (including defeating anti-tampering mechanisms), to exploit interfaces between components and system and external calls (e.g. to spy exchanged data and/or to inject fake data), to extract assets at rest or in runtime and/or modify the Authenticator Application code flow (analyze and bypass anti-tamper protection), including:

- For white box crypto
 - Statistical analysis (including DCA if applicable)
 - Fault analysis (including DFA if applicable)
- For code and data protection
 - Identification of control flows and data flows
 - Obfuscation measures analysis
 - De-obfuscation of protected code
 - Circumvent anti-debug protection
 - Circumvent anti-emulation, anti-rooting, anti-hooking and anti-DBI protections
- Internal communication channel monitoring and manipulation

2.3 Documents for Certification

Depending on which level you wish to certify at, you will need to submit one or more of the following documents. These can be submitted as a single document or as separate documents.

- **FIDO Biometric Evaluation Report:** This report is delivered by the FIDO accredited lab for the biometric certification program after evaluating the biometric sensor against FIDO biometric requirements.
- **Configuration Management Scope and Capabilities:** All documentation covering the configuration items, their system records, plan and usage. This evidence is intended to prove that there is discipline and control in the processes of refinement and modification of the TOE and the related information. These are put in place to ensure the integrity of the portions of the TOE that they control, by providing a method of tracking any changes, and by ensuring that all changes are authorized.
- **Development Information:** A set of documents describing the TOE such as its design, security architecture, implementation of the security and privacy requirements, source code, etc. These are used as the basis for conducting vulnerability analysis and testing by the lab.
- **Development Security Life-Cycle Support:** Documentation describing the life-cycle phases of the TOE, the developer's physical, procedural, personnel, and other security measures; tools and implementation standards used; measures handling of security flaws and the procedures used for the delivery of the TOE to the consumer.
- **Operational User Guidance:** Documentation that is intended to be used by all types of users of the TOE in its evaluated configuration: end-users, persons responsible for maintaining and administering the TOE in a correct manner for maximum security, and by others (e.g. programmers) using the TOE's external interfaces. Operational User Guidance describes the security functionality, provides instructions and guidelines (including warnings), includes the security-critical information, and the security-critical actions required, for its secure use.
- **Preparative Procedures Guidance:** Documentation useful for ensuring that the TOE has been received and installed in a secure manner as intended by the developer. The requirements for preparation call for a secure transition from the delivered TOE to its initial operational environment. This includes investigating whether the TOE can be configured or installed in a manner that is insecure but that the user of the TOE would reasonably believe to be secure.
- **Security Target:** A document including implementation-dependent statements of security needs for a specific identified TOE. The TOE in the context of the FIDO authentication certification program corresponds to the Authenticator security boundary.
- **Test Documentation:** A set of documents describing the security and functional tests procedures and how these cover the security functionality. The goal is to provide evidence that all security functionalities operate according to the design descriptions. Note that this does not address penetration testing which is based upon an analysis that specifically seeks to identify vulnerabilities in the design and implementation.

3. Requirements

This section is normative.

3.1 Authenticator definition Derived Requirements

For the purpose of these requirements, the Authenticator is the set of hardware and software within the Authenticator boundary, as defined in the response to requirement 1.1.

The underlying operating environment of the Authenticator Application might be clearly separated from a high-level operating system (HLOS). In this case we call it "**Restricted Operating Environment**" (ROE). If such separation meets the requirements defined in [FIDORestrictedOperatingEnv], we call it **Allowed Restricted Operating Environment** (AROE).

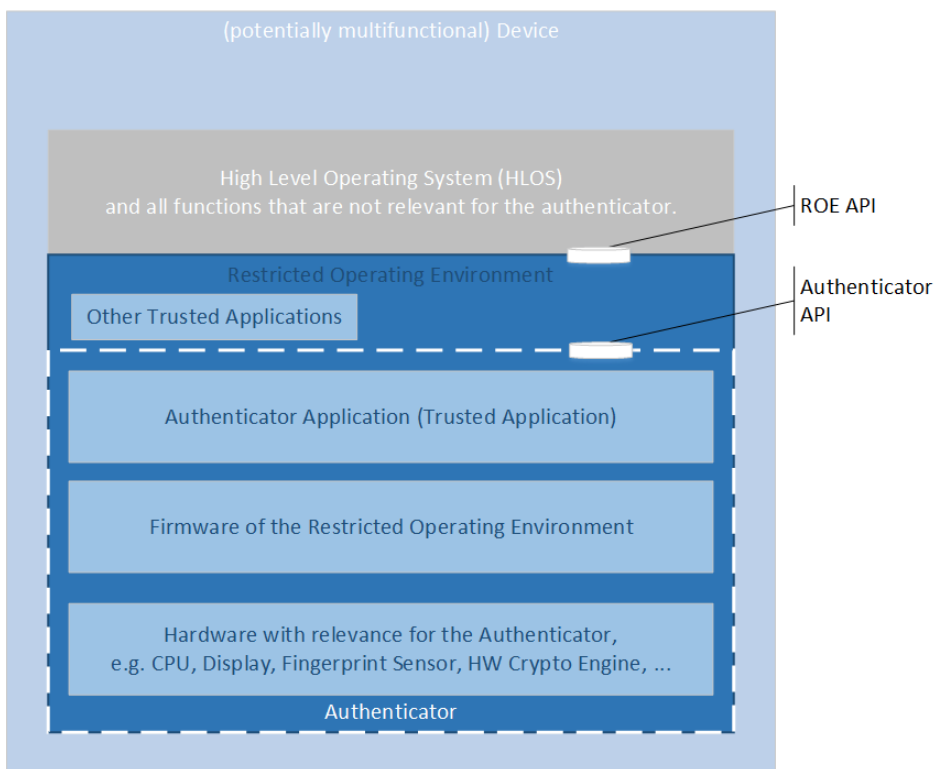


Fig. 3 Restricted Operating Environments Architectural Overview

At L1 and L1+, the Restricted Operating Environment as used in the figure above might be identical with the HLOS plus underlying HW and doesn't need to be an Allowed Restricted Operating Environment (AROE).

At L2 and above the Restricted Operating Environment is an Allowed Restricted Operating Environment according to [FIDORestrictedOperatingEnv], e.g. a Trusted Execution Environment or a Secure Element.

In these requirements, the term "FIDO Relevant" means "used to fulfill or support FIDO Security Goals or FIDO Authenticator Security or Privacy Requirements".

NOTE

For the certification levels L1, L1+ and L2 the Authenticator doesn't need to restrict the private authentication key (Uauth.priv) to signing valid FIDO messages only (see requirement 2.1.15 which is label L2+ and higher). As a consequence, the generation of the to-be-signed object could be performed outside of the Authenticator.

VQ TP L1 L2 L2+ L3 L3+

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The vendor SHALL document an explicit Authenticator boundary. The Authenticator's boundary SHALL include any hardware that performs or software that implements functionality used to fulfill FIDO Authenticator Security and Privacy Requirements, or FIDO Relevant user verification, key generation, secure transaction confirmation display, or signature generation. If the Authenticator includes a software component, the boundary SHALL contain the processor that executes this software. If Transaction Confirmation Display [UAFProtocol] is supported and the Metadata Statement related to this Authenticator claims Transaction Confirmation Display support with tcDisplay including the flag TRANSACTION_CONFIRMATION_DISPLAY_PRIVILEGED_SOFTWARE (0x0002), then the Transaction Confirmation Display MAY be implemented outside of an AROE - even when the Authenticator aims for a certification at L2 and higher. However, in such case the vendor SHALL document where and how Transaction Confirmation Display is implemented. The Authenticator boundary as defined by FIDO is comprised of the hardware and software where the Authenticator runs. The Authenticator Application by definition, is always inside the authenticator boundary. The vendor MUST describe the operational environment for the Authenticator Application, including any specific hardware or operating system requirements to completely define this boundary. The Authenticator always comprises hardware and software and the vendor SHALL describe the boundary. An Authenticator typically belongs to one of the 4 categories: 1. Authenticator Application running on some HLOS without an effective protection of the Authenticator Security Parameters against most other applications running in the same environment. 2. Authenticator Application running on some HLOS with an effective protection of the Authenticator Security Parameters against most other applications running in the same environment - without breaking the HLOS. 3. as #2, but having the Secret Authenticator Security Parameters protected by an AROE. 4. entire Authenticator is implemented in an AROE (i.e. typically qualifying for L2 and higher). For Authenticators falling under #1-3 above, the Authenticator is qualified for L1 Authenticator Certification only, and SHOULD refer to the L1 portions of this Requirements document. For Authenticators meeting #4, the Authenticator is qualified for L1 or above. It is up to the vendor to review the requirements in this document to determine the Level of Authenticator Certification they wish to complete. Authenticators meeting #2, might qualify for L1+ Authenticator Certification. Authenticators meeting the following category might qualify for L1+ Authenticator Certification: Authenticator Application running on some HLOS with an effective protection of the Authenticator Security Parameters against most other applications running in the same environment - with breaking the HLOS. Cloud services and computer networks cannot be part of the Authenticator boundary.	
	NOTE	

No.	Requirement	Security Measures
1.1	The Vendor should provide a clear description of the HW, supported OS versions that the evaluation is covering. See below: - Name of the authenticator: - Hardware Type & Version: - Underlying Software Platform/OS: In addition, the vendor must provide a high-level physical and logical representation of the Authenticator security boundary. The documentation provided by the vendor should cover software attack protection and, if required, hardware attack protection.	(SM-1, SM-9, SM-26)
	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ASE_INT, and ASE_SPD Security Target: The security boundary (mostly HW) should be defined in the TOE definition part of the Security Target, depending on the targeted FIDO security level (L3/L3+). Any additional component, inside the Authenticator boundary, not part of the CC certification, needs to be evaluated by FIDO. L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ASE_INT, and ASE_SPD Security Target: The security boundary (mostly HW) should be defined in the TOE definition part of the Security Target, depending on the targeted FIDO security level (L3/L3+). Any additional component, inside the Authenticator boundary, not part of the CC certification, needs to be evaluated by FIDO. L3/L3+ - Java Card PP (Common Criteria) Security Target with: ASE_INT, and ASE_SPD Security Target: The security boundary should be defined in the TOE definition part of the Security Target, depending on the targeted FIDO security level (L3/L3+). Any additional component, inside the Authenticator boundary, not part of the CC certification, needs to be evaluated by FIDO. L3 - TEE PP (GlobalPlatform) Security Target with: ASE_INT, and ASE_SPD Security Target: The boundary should be defined in the TOE defininon part of the Security Target. Any additional component inside the Authenticator boundary which is not part of the GP certification, needs to be evaluated by FIDO.	
	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with arationale of how the requirement above is met. At L1, the Authenticator vendor SHALL declare and describe to which of the above mentioned categories the Authenticator Application belongs. At L1, the vendor SHALL also describe what portions of functionality the Authenticator uses from any underlying operating environment that belongs to the Authenticator but that is not included in the Authenticator Application.	
	L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:	

No.	Requirement	Security Measures
	- Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
1.2	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The vendor SHALL document all FIDO Relevant security and cryptographic functions implemented within the Authenticator, both those on the "Allowed Cryptography List" [FIDOAllowedCrypto] and those not on this list. NOTE Some algorithms may only be allowed for certain Security Certification Levels. For example, not all cryptographic algorithms that are acceptable for L1 may be acceptable for L3. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with FCS cryptographic security requirements and Security Functional specification of cryptographic functions ADV_FSP.4 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with FCS cryptographic security requirements and Security Functional specification of cryptographic functions ADV_FSP.4 L3/L3+ - Java Card PP (Common Criteria) Security Target with FCS cryptographic security requirements and Security Functional specification of cryptographic functions ADV_FSP.4 L3 - TEE PP (GlobalPlatform) Security Target with FCS cryptographic security requirements and Development information (architecture and interfaces) Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. At L1, the vendor SHALL mark the FIDO Relevant security and cryptographic functions implemented in the Authenticator but implemented <i>outside the</i>	(SM-1, SM-9,

No.	Authenticator Application (i.e. in the underlying OS or HW). Requirement	SA-16 Security Measures
	L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The vendor SHALL document where Authenticator User Private Keys (Uauth.priv) are stored, the structure of all KeyIDs/CredentialIDs and Key Handles used by the Authenticator, and explain how these private keys are related to the KeyIDs/CredentialIDs and Key Handles used by the Authenticator. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with - TOE design: ADV_TDS.3 and - Security architecture: ADV_ARC.1 with key storage, handle and use focus L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with - TOE design: ADV_TDS.3 and - Security architecture: ADV_ARC.1 with key storage, handle and use focus Note: PP0117 offers a Root of Trust (firmware + data/keys) that provides security services for the initial phase of the TOE. L3/L3+ - Java Card PP (Common Criteria) Security Target with - TOE design: ADV_TDS.3 and - Security architecture: ADV_ARC.1 with key storage, handle and use focus L3 - TEE PP (GlobalPlatform) Security Target with:	

No.	Development (ADV) information (architecture and interfaces)	Requirement	Security Measures
1.3	Calibration		(SM-1, SM-6, SM-26)
	GlobalPlatform Calibration at L3 No calibration required		
	CC Calibration at L3/L3+ No calibration required		
	L1 Vendor Questionnaire Provide the Security Secretariat with arationale of how the requirement above is met. At L1, the private keys, KeyIDs/CredentialIDs etc. that are generated outside the <u>Authenticator Application</u> SHALL be documented, but their internal structure does not need to be explained in detail.		
	L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.		
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.		
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • Mapping to Companion Program Requirements • Source Code (optionally)		
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Mapping to Companion Program Requirements • Source Code		
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • Mapping to Companion Program Requirements • Source Code		
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.		
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
	L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.		
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.		
L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.			
UAF: FIDO2, Consumer L1, L2, L3, L3+ and Higher			

No.	Requirement	Security Measures
1.4	The vendor SHALL document an Authenticator as a first-factor Authenticator or a second-factor Authenticator. [UAFAuthnrCommands], [Section 6.3.4] and [FIDOGlossary] entries "Authenticator, 1stF / First Factor" and "Authenticator, 2ndF / Second Factor".	(SM-26)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria)	
	Security Target Introduction: ASE_INT	
	L3 - TEE PP (GlobalPlatform)	
	Security Target Introduction: ASE_INT	
	Calibration	
	GlobalPlatform Calibration at L3	
	No calibration required	
	CC Calibration at L3/L3+	
	No calibration required	
	L1 Vendor Questionnaire	
	Provide the Security Secretariat with a rationale of how the requirement above is met.	
	At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.	
	L1+ Vendor Questionnaire	
	Provide the tester with documentation that specifies how the requirement above is met.	
L2 Vendor Questionnaire		
Provide the tester with documentation that specifies how the requirement above is met.		
L3 GlobalPlatform Vendor Questionnaire		
Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence:		
- Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)		
L3 Vendor Questionnaire		
Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:		
- Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code		
L3+ Vendor Questionnaire		
Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:		
- Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code		
L1 Test Procedure		
{A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing.		
L1+ Test Procedure		
{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
L2 Test Procedure		
{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
L3 GlobalPlatform Test Procedure		
The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.		
L3 Test Procedure		
The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.		
L3+ Test Procedure		
The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.		

No.	VQ	TP	L1	L2	L2+	L3	L3+	Requirement	Security Measures
1.5	UAF = FIDO2, Consumer = Enterprise, TVFR, L1 and higher							If the Authenticator is a second-factor Authenticator, then the Authenticator SHALL NOT store user names (UAF) / PublicKeyCredentialUserEntity (FIDO2) inside a Raw Key Handle [UAFAuthnrCommands], [Section 5.1]. A cryptographically wrapped Raw Key Handle is called Key Handle.	(SM-23)
	Relation to Companion Program								
	L3/L3+ - IC PP (Common Criteria)							NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria)							NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria)							NOT COVERED	
	L3 - TEE PP (GlobalPlatform)							NOT COVERED	
	Calibration								
	GlobalPlatform Calibration at L3							No calibration required	
	CC Calibration at L3/L3+							No calibration required	
	L1 Vendor Questionnaire							Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>Provide</i> the Security Secretariat with a description of how the requirement above is met.	
	L1+ Vendor Questionnaire							Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>Provide</i> the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire							Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>Describe</i> how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire							Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire							Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire							Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure							{A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure							{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure							{A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure							The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	

No.	The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. Requirement	Security Measures
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
1.6	UAF + FIDO2; Consumer + Enterprise; TVFR; L1 and higher Supporting Transaction Confirmation is OPTIONAL for Authenticators. If the Authenticator supports Transaction Confirmation Display, then it SHALL hash the Transaction Content using an Allowed Hashing Cryptographic Function ([UAFAuthnCommands] Section 6.3.4, [WebAuthn] Section 10.2 and 10.3). Relation to Companion Program L3/L3+ - IC PP (Common Criteria) If Transaction Confirmation Display is present: Security Target with: FCS_COP.1.1 / SHA L3/L3+ - 3S in SoC PP (Common Criteria) If Transaction Confirmation Display is present: Security Target must list the hash functions in the supported crypto operations (FCS_COP) in the Package for Cryptographic Services L3/L3+ - Java Card PP (Common Criteria) If Transaction Confirmation Display is present: Security Target with: FCS_COP.1 / SHA L3 - TEE PP (GlobalPlatform) If Transaction Confirmation Display is present: Security Target with: FCS_COP.1 / SHA Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	(SM-16)

No.	Requirement	Security Measures
	- Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	UAF+FIDO2; Consumer + Enterprise; TVFR; L1 and higher When responding to a "Register", "Sign", "Deregister", "MakeCredentials", or "GetAssertion" command, the Authenticator SHALL use an Allowed Hashing or Data Authentication Cryptographic Function to bind keys to the app or the RP ID. In the case of a UAF Authenticator, if using KHAAccessToken method of binding keys to apps, it SHALL be mixed with <u>ASM</u>-provided KHAAccessToken and AppID. In the case of FIDO2 authenticator, any use of a hashing function SHALL be applicable, including in Key Derivation Functions. If the Authenticator uses an alternative method of binding keys to apps, the vendor SHALL describe why this method provides equivalent security. Equivalent security means, (1) it prevents other apps (not originating from the same RP) from using the key and (2) in the case of bound Authenticators, it prevents other FIDO Clients of triggering the use of that key, and (3) it may rely on the underlying <u>HLOS</u> platform to work as expected. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is partially covered by the <u>PP</u> (FCS_COP.1) provided the <u>Authenticator Application</u> uses allowed algorithms provided by the platform. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is partially covered by the <u>PP</u> (FCS_COP.1) provided the <u>Authenticator Application</u> uses allowed algorithms provided by the platform. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is partially covered by the <u>PP</u> (FCS_COP.1) provided the <u>Authenticator Application</u> uses allowed algorithms provided by the platform. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) PARTIALLY COVERED This FIDO requirement is partially covered by the <u>PP</u> (FCS_COP.1) provided the <u>Authenticator Application</u> uses allowed algorithms provided by the platform. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	

No.	L1 Vendor Questionnaire Requirement Provide the Security Secretariat with a rationale of how the requirement above is met.	Security Measures
1.7	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: <u>Development Information</u> (Architecture and Interfaces) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: <u>Development Information</u> (High Level Design) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: <u>Development Information</u> (Low Level Design) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+ UAF; Consumer + Enterprise; TVFR; LT and higher	(SM-16)
	If the Authenticator uses the KHAAccessToken method of binding keys to apps, then the Authenticator SHALL NOT process a "Deregister" command prior to validating the KHAAccessToken. [<u>UAFAuthnrCommands</u>], [Section 6.4.4] Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	

No.	Requirement	Security Measures
1.8	GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-13)
	UAF + FIDO2; Consumer + Enterprise; TVFR; L1 and higher Supporting Transaction Confirmation is OPTIONAL for Authenticators. If the Authenticator supports Transaction Confirmation Display, then it SHALL display the transaction content supplied in the "Sign" command. [UAFAuthnrCommands], Section 6.3.4, [FIDOGlossary], and [WebAuthn] Sections 10.2 and 10.3. If the Metadata Statement related to this Authenticator claims Transaction Confirmation Display support with tcDisplay including the flag TRANSACTION_CONFIRMATION_DISPLAY_PRIVILEGED_SOFTWARE (0x0002), the Transaction Confirmation Display MAY be implemented outside of an AROE. If tcDisplay includes the flag TRANSACTION_CONFIRMATION_DISPLAY_TEE, or TRANSACTION_CONFIRMATION_DISPLAY_HARDWARE, then the Transaction Confirmation Display SHALL be implemented inside the AROE as part of the Authenticator. Relation to Companion Program	

No.	L3/L3+ - IC PP (Common Criteria) Requirement	Security Measures
1.9	NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) OPTIONALLY COVERED If TUI PP-Module is used, the display is covered by the AROE Security Target, Development information (architecture and interfaces), Security guidance, Test documentation SFR: TUI PP-Module (FDP_ACC.1, FDP_ACF.1, FTP_TRP.1). The FIDO specific parts of Display usage by the Authenticator Application need to be expressed in the Security Target and expressed in the Security Target and verified as part of the FIDO evaluation by the Lab. Additional note: According to the requirements, the display (if present) is to be included in the AROE in order to be suitable for L3.	(SM-10)
	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.	
	L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	
	L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>describe</i> how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing.	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure	

No.	Requirement	Security Measures
	The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
1.10	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1 and higher Authenticators SHALL validate data input to the Authenticator to defend against buffer overruns, stack overflows, integer under/overflow or other such invalid input-based attack vectors. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is partially covered by the PP (FAU_ARP.1 and FDP_ITC.2/Installer). This requirement (i.e. input validation to the application) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) PARTIALLY COVERED This FIDO requirement is partially covered by the PP (FAU_ARP.1, FDP_IFC.1, FDP_IFF.1 and FMT_MSA.3). This requirement (i.e. input validation to the application) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration L1: At L1, the Authenticator Application needs to verify only the inputs to the Authenticator Application before they are processed further by the underlying operating environment. L1+: At L1+, the Authenticator Application needs to verify only the inputs to the Authenticator Application before they are processed further by the underlying operating environment. This characteristic will be verified as specified in section <u>Specific Calibration for Level 1+</u>. L2: At L2, this requirement SHALL be applied to all inputs that can impact FIDO Security Goals or fulfillment of the FIDO Authenticator Security Requirements, including all those inputs into the FIDO implementation. All inputs to the Authenticator, including those not directly related to the FIDO implementation such as general inputs to the AROE, SHOULD meet this requirement. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN.AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5). L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. L1+ Vendor Questionnaire Provide a rationale that the Authenticator validates all data input to the Authenticator. Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Provide a rationale that the Authenticator validates all data input to the Authenticator.	(SM-28)

No.	Requirement	Security Measures
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+ UAF + FIDO2; Consumer + Enterprise; DaD; L2+ and higher	

No.	Requirement	Security Measures
1.11	If the Authenticator has a Transaction Confirmation Display, the AppID/RP ID <u>SHALL</u> be displayed to the user when a "Register", "Sign", or "Deregister" (UAF) command is received. Displaying the AppID/RP ID <u>SHALL</u> meet the same security properties that apply to the Transaction Confirmation Display (see requirement 1.9). Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) OPTIONALLY COVERED If TUI PP-Module is used, the display is covered by the AROE Security Target. Development information (architecture and interfaces), Security guidance, Test documentation SFR: TUI PP-Module (FDP_ACC.1, FDP_ACF.1, FTP_TRP.1). The FIDO specific parts of Display usage by the <u>Authenticator Application</u> need to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Additional note: According to the requirements, the display (if present) is to be included in the <u>AROE</u> in order to be suitable for L2/L2+/L3/L3+. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3 GlobalPlatform Test Procedure The tester <u>SHALL</u> <u>verify</u> that the provided rationale and evidence meet the requirement. The tester <u>SHALL</u> <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester <u>SHALL</u> <u>verify</u> the provided rationale and documentation meets the requirement. The Tester <u>SHALL</u> <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester <u>SHALL</u> <u>verify</u> the provided rationale and documentation meets the requirement. The Tester <u>SHALL</u> <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	(SM-10)

No.	VQ	TP	L1	L2	L2+	L3	L3+	Requirement	Security Measures
FIDO2: Consumer + Enterprise; DaD; L1 and higher									
1.12	If an Authenticator supports Multi-Device Credentials, it MUST support the Device Public Key extension.								(SM-10)
	Relation to Companion Program								
	L3/L3+ - IC PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u> , FSP and ATE and verified as part of the FIDO evaluation by the Lab.								
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u> , FSP and ATE and verified as part of the FIDO evaluation by the Lab.								
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u> , FSP and ATE and verified as part of the FIDO evaluation by the Lab.								
	L3 - TEE PP (GlobalPlatform) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u> , FSP and ATE, and verified as part of the FIDO evaluation by the Lab.								
	Calibration No calibration required.								
	L1 Vendor Questionnaire <i>Provide the Security Secretariat with arationale of how the requirement above is met.</i>								
	L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, includingDevelopment Information (High level design).</i>								
	L2 Vendor Questionnaire <i>Provide the tester with documentation that specifies how the requirement above is met.</i> <i>Provide a documentation review procedure to confirm that the Authenticator’s design is consistent with the provided rationale. Please provide explicit design document references.</i>								
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements								
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements								
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements								
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.								
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.								
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.								
VQ TP L1 L2 L2+ L3 L3+									

No.	Requirement	Security Measures
R1.13	FIDO2 + U2F; Consumer + Enterprise; DaD; L1 and higher	
	An Authenticator MUST NOT implement proprietary features that violate the FIDO technical specs.	
	The Vendor MUST document any proprietary features that impact FIDO functionality.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) Security Target with: ADV_ARC ADV_FSP	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ADV_ARC ADV_FSP	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: ADV_ARC ADV_FSP	
	L3 - TEE PP (GlobalPlatform) Security Target with: ADV_ARC ADV_FSP	
	Calibration	
	No calibration required.	
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the requirement above is met.	
	L2 Vendor Questionnaire Provide the tester with a rationale of how the requirement above is met.	(SM-10)
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements	
	L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	VQ TP L1 L2 L2+ L3 L3+	

3.2 Key Management and Authenticator Security Parameters

3.2.1 Documentation

No.	Requirement	Security Measures
2.1.1	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The vendor SHALL document all Authenticator Security Parameters (ASPs). Data parameters used by or stored within the Authenticator which are FIDO Relevant are called Authenticator Security Parameter. These SHALL, at minimum, include all FIDO user verification reference data, FIDO biometric data, Key Handle Access Tokens, User Verification Tokens (see [UAFAuthnrCommands], Section 5.3 and [FIDOGlossary]), signature or registration operation counters, FIDO Relevant cryptographic keys, privacy sensitive data, and FIDO relevant Allowed Random Number Generator state data. Biometric data is defined as raw captures off the sensor, stored templates, candidate match templates, and any intermediate forms of biometric data. Biometric data not used with FIDO is excluded. NOTE Note that the User Verification Token defined by UAF is different from the pinToken and pinUvAuthToken defined by CTAP [FIDOCTAP]. It is entirely internal to the authenticator whereas the others are passed in and out of the authenticator via CTAP. NOTE Note that the keys generated when using FIDO2 ClientPIN subcommands are considered ASPs. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ASE_SPD including all relevant ASPs. Missing ASPs (as not all ASPs may be covered by the HW CC) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ASE_SPD including all relevant ASPs. Missing ASPs (as not all ASPs may be covered by the HW CC) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) Security Target with: ASE_SPD including all relevant ASPs. Missing ASPs (as not all ASPs may be covered by the OS CC) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) Security Target with: ASE_SPD including all relevant ASPs. Missing ASPs (as not all ASPs may be covered by the GP TEE) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration L1: At L1, this <u>Authenticator boundary</u> includes the underlying operating environment. L1+: At L1+, this <u>Authenticator boundary</u> includes the underlying operating environment. L2: No calibration required. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire <i>Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.</i> L1+ Vendor Questionnaire <i>Provide the tester with documentation that specifies how the requirement above is met.</i> L2 Vendor Questionnaire <i>Provide the tester with documentation that specifies how the requirement above is met.</i> L3 GlobalPlatform Vendor Questionnaire	(SM-1, SM-2, SM-6, SM-13, SM-15, SM-16, SM-26)

No.	Requirement	Security Measures
	- Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
	UAF, U2F, FIDO2: Consumer + Enterprise, DaD: L1 and higher For each Authenticator Security Parameter, the vendor SHALL document the protections that are implemented for this parameter in order to support the FIDO Authenticator Security Goals or FIDO Authenticator Security Requirements, the location where this parameter is stored, how the parameter is protected in each storage location, how and when the parameter is input or output from the Authenticator, in what form the parameter is input or output, and when (if ever) the parameter is destroyed. Those Authenticator Security Parameters whose confidentiality MUST be protected in order to support the FIDO Security Goals or FIDO Authenticator Security Requirements SHALL be documented as 'Secret Authenticator Security Parameters'; these SHALL, at minimum, include any of the following that are FIDO Relevant: secret and private keys, Allowed Random Number Generators' state data, FIDO user verification reference data, and FIDO biometric data. NOTE Please note that the keys stored for the FIDO2 large-blob support and for credBlob extension are Authenticator Security Parameters but not <u>Secret Authenticator Security Parameters</u> as they are passed outside the Authenticator Boundary. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ADV_FSP and ADV_ARC L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ADV_FSP, ADV_ARC, FPT_INI Note: ADV_ARC for PP-0117 has been extended (compared to the one relevant to Smart Cards) to cover the specifics of integrated security subsystem L3/L3+ - Java Card PP (Common Criteria) Security Target with: ADV_FSP and ADV_ARC L3 - TEE PP (GlobalPlatform) Security Target with: Development information (architecture and interfaces) Remark: Protection of biometric data should be provided through the <u>AROE</u> biometric system: BIO PP-Module Calibration	

No.	GlobalPlatform Calibration at L3	Requirement	Security Measures	
2.1.2		No calibration required	(SM-1, SM-2, SM-6, SM-13, SM-15, SM-16, SM-26)	
		CC Calibration at L3/L3+ No calibration required		
		L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, the vendor SHALL describe the reliance of the Authenticator Application on the underlying operating environment for those Authenticator Security Parameters which are not fully maintained in the Authenticator Application.		
		L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.		
		L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.		
		L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source code (optionally)		
		L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements		
		L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements		
		L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.		
		L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.		
		L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.		
		L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement.		
		L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.		
		L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.		
		VQ TP L1 L2 L2+ L3 L3+		
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher			
	For each Authenticator Security Parameter that is a cryptographic key that is generated, used, or stored within the Authenticator, the vendor SHALL document how this key is generated, whether the key is unique to a particular Authenticator or shared between multiple Authenticators, and the key's claimed security strength. This claimed security strength SHALL NOT be larger than the maximal allowed claimed security strength for the underlying algorithm, as specified in the "Allowed Cryptography List" [FIDOAllowedCrypto]. If the key is used with an algorithm not listed on the "Allowed Cryptography List" [FIDOAllowedCrypto], then the claimed security strength for this key SHALL be zero.			
	NOTE This requirement interacts with requirement 5.4 as the security strength of a key might get degraded - depending on potential side channel attacks - slightly each time the key is used.			
	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_CKM and ADV_FSP L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_CKM in Package for Cryptographic Services and ADV_FSP			

No.	L3/L3+ - Java Card PP (Common Criteria) Requirement	Security Measures
2.1.3	Security Target with: FCS_CKM and ADV_FSP L3 - TEE PP (GlobalPlatform) Security Target with: Development information (architecture and interfaces) SFR: FCS_CKM Calibration L1+: At L1+, the key may be used with an algorithm listed on the "Allowed Cryptography List" [FIDOAllowedCrypto] but with a different configuration (e.g. AES with different configuration taken from Rijndael specification [AES-Proposal]) than the standard one. In this case, the claimed security strength is equivalent to the one with a standard configuration. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, the vendor SHALL describe the reliance of the Authenticator Application on the underlying operating environment for those Authenticator Security Parameters (where stored, how protected, ...) which are not fully maintained in the Authenticator Application. If a cryptographic key is generated using an RNG with an unknown security strength, the security strength of that key is unknown. L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements L1 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-2, SM-6, SM-13, SM-16, SM-26)
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The vendor SHALL document the Authenticator's Overall Claimed Security Strength; the Overall Authenticator Claimed Security Strength SHALL be less than or equal to the claimed security strength of all the Authenticator Security Parameters that are cryptographic keys. Relation to Companion Program	

No.	L3/L3+ - IC PP (Common Criteria) Requirement	Security Measures
2.1.4	NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration L1: At L1, if the security strength for the <u>RNG</u> is not known, an unknown Overall Claimed Security Strength SHALL be assumed - which is allowed at L1. L1+: At L1+, the Authenticator's Overall Claimed Security Strength SHALL at least be greater than or equal to 100 bits and it SHOULD be greater than or equal to 112 bits. L2: At L2, the Authenticator's Overall Claimed Security Strength SHALL at least be greater than or equal to 100 bits and it SHOULD be greater than or equal to 112 bits. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, the Authenticator's Overall Claimed Cryptographic Strength SHALL at least be greater than or equal to 100 bits and it SHOULD be greater than or equal to 112 bits. CC Calibration at L3/L3+ L3: At L3, the Authenticator's Overall Claimed Cryptographic Strength SHALL at least be greater than or equal to 100 bits and it SHOULD be greater than or equal to 112 bits. L3+: At L3+, the Authenticator's Overall Claimed Cryptographic Strength SHALL at least be greater than or equal to 100 bits and it SHOULD be greater than or equal to 112 bits.	
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	(SM-1, SM-16, SM-26)
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Operational User Guidance</u> • Mapping to Companion Program Requirements	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Operational User Guidance</u> • Mapping to Companion Program Requirements	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	

No.	L3 Test Procedure Requirement The Tester SHALL verify the provided rationale and documentation meets the requirement.	Security Measures
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
2.1.5	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1 and higher All Authenticator Security Parameters within the Authenticator SHALL be protected against modification and substitution. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3.1 As the FPT_PHP is focusing on the HW protection, the not fully covered ASPs (e.g. on OS level) needs to be verified by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3.1 As the FPT_PHP is focusing on the HW protection, the not fully covered ASPs (e.g. on OS level) needs to be verified by the Lab. L3/L3+ - Java Card PP (Common Criteria) Security Target with: FDP_ACC.1, FDP_ACF.1, FDP_IFC.2, FDP_IFF.1, FDP_ITT.1, FDP_ROL.1, FDP_SDI.2, FMT_MSA.3, FMT_MTD.1, FPT_FLS.1, FPT_INI.1, and FPT_ITT.1 FPT_TST.1 (not mandatory) but if the platform is also FIPS compliant, this requirement must be enforced. L3 - TEE PP (GlobalPlatform) Security Target with: FDP_ACC.1, FDP_ACF.1, FDP_IFC.2, FDP_IFF.1, FDP_ITT.1, FDP_ROL.1, FDP_SDI.2, FMT_MSA.3, FMT_MTD.1, FPT_FLS.1, FPT_INI.1, FPT_ITT.1, and FPT_TEE.1 Calibration Calibration L1: At L1, the Authenticator Application SHALL follow best security practices specific to the underlying operating environment for protecting the Authenticator Security Parameters against being modified or substituted by (1) the user and (2) other applications. Due to the nature of L1 it is acceptable for the Authenticator Application to rely on the underlying operating environment for protecting the Authenticator Security Parameters against other applications running in the same operating environment. L1+: At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment and it SHALL implement software protection techniques to protect against modification and substitution (e.g. device binding and anti-tampering). This characteristic will be verified as specified in section Specific Calibration for Level 1+. The code of the Authenticator Application is considered a Security Parameter and hence need to be protected against modification. L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5)).	(SM-1, SM-6,

No.	L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5)).	SA-13 Security Measures Siv-16)
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale that all Authenticator Security Parameters within the Authenticator are protected against modification and substitution. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1 and higher All Secret Authenticator Security Parameters within the Authenticator SHALL be protected against unauthorized disclosure. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FDP_ITT.1,	

No.	Requirement	Security Measures
2.1.6	FTP_ITT.1, FDP_IFC.1, and FPT_PHP.3 As the FPT_PHP is focusing on the HW protection, the not fully covered ASPs (e.g. on OS level) needs to be verified by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FDP_ITT.1, FTP_ITT.1, FDP_IFC.1, and FPT_PHP.3 + OPTIONAL : if Security Target uses external NVM for persistent storage, Security Target with: FDP_SDC (protection in confidentiality) FDP_SDI (protection in integrity) FDP_URC (protection against unauthorized rollback) L3/L3+ - Java Card PP (Common Criteria) Security Target with: FDP_ACC.1, FDP_ACF.1, FDP_IFC.2, FDP_IFF.1, FDP_ROL.1, FMT_MSA.1, FMT_MSA.3, and FPR_UNO.1 L3 - TEE PP (GlobalPlatform) Security Target with: FDP_ACC.1, FDP_ACF.1, FDP_IFC.2, FDP_IFF.1, FDP_ITT.1, FDP_ROL.1, FMT_MSA.1, FMT_MSA.3, FPT_ITT.1, and FPT_INI.1	
	Calibration L1: At L1, the Authenticator Application SHALL follow best security practices specific to the underlying operating environment for protecting the Authenticator Security Parameters against being disclosed to (1) the user and (2) other applications. At L1, the Authenticator Application (either by implementing appropriate protection mechanisms directly in the Authenticator Application or by leveraging the underlying operating environment for implementing those) SHALL protect the Secret Authenticator Security Parameters from being disclosed to other application running in the same operating environment. If the Authenticator Application cannot leverage mechanisms of the underlying operating environment for that, it SHALL at least store such parameters in encrypted form such that the decryption key is not available to the other applications running in the same operating environment. For example, by using a user provided secret to be entered or a key derived from some biometric at startup of the Authenticator Application using a best practice key derivation function (for converting a low entropy password into a cryptographic key, e.g. according to [SP800-132]).	
	L1+: At L1+, the Authenticator Application SHOULD minimize its dependency on the underlying operating environment and it SHALL implement software protection techniques to protect against reverse engineering (e.g. with encryption, obfuscation and whitebox cryptography for secret keys), against software induced side-channel and fault attacks, and against WBC code/data lifting (e.g. with anti-emulation, device binding). This characteristic will be verified as specified in section Specific Calibration for Level 1+.	
	L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE.	
	GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5)). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5)).	(SM-1, SM-13, SM-16)
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	

No.	Requirement	Security Measures
	L2 Vendor Questionnaire Provide a rationale that all Secret Authenticator Security Parameters within the Authenticator are protected against unauthorized disclosure. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher The Authenticator SHALL use an Allowed Data Authentication, Signature, or Key Protection Cryptographic Function to protect any externally-stored Authenticator Security Parameters against modification or the replay of stale (but possibly previously authenticated) data. NOTE In this requirement, externally-stored refers to parameters stored outside of the <u>Authenticator boundary</u>. For example, cloud storage services. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria)	

No.	Requirement	Security Measures
2.1.7	Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) in Package for Cryptographic Services Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the evaluation by the Lab.	(SM-1, SM-6, SM-13, SM-15, SM-16, SM-25)
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) FDP_ACC.1/EXT_MEM Missing ASPs (as not all ASPs may be covered) needs to be expressed in the <u>Security Target</u> and verified as part of the evaluation by the Lab.	
	L3 - TEE PP (GlobalPlatform) Security Target with: FCS_COP.1, FDP_ACC.1, FDP_ACF.1, FCS_COP.1 for signature generation, FDP_SDI.2 for replay protection Missing ASPs (as not all ASPs may be covered by the GP TEE) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab.	
	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A1} The Security Secretariat <u>SHALL review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester <u>SHALL verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester <u>SHALL conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure The tester <u>SHALL verify</u> that the provided rationale and evidence meet the requirement. The tester <u>SHALL execute</u> independent tests and/or a sample of vendor tests to verify the test results.	

No.	Requirement	Security Measures
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
2.1.8	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher The Authenticator SHALL protect any externally-stored Secret Authenticator Security Parameters using an Allowed Key Protection Cryptographic Function. [UAFAuthnrCommands], [Sections 5.1, 6.3.4] for RawKeyHandles. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) in Package for Cryptographic Services Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) FDP_ACC.1/EXT_MEM Missing ASPs (as not all ASPs may be covered) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) Security Target with: FCS_COP.1, FDP_ACC.1, FDP_ACF.1 Missing ASPs (as not all ASPs may be covered by the GP TEE) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u>	(SM-1, SM-6, SM-13, SM-15, SM-16, SM-25)

No.	• Mapping to Companion Program Requirements • Source Code Requirement	Security Measures
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher Any key used with an Allowed Key Protection Cryptographic Function to protect an externally-stored secret or private key which is an Authenticator Security Parameter SHALL have a claimed security strength greater than or equal to the claimed security strength of the key being wrapped. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: OSP, AGD_PRE L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: OSP, AGD_PRE L3/L3+ - Java Card PP (Common Criteria) Security Target with: OSP, AGD_PRE L3 - TEE PP (GlobalPlatform) Security Target with: Development information (architecture and interfaces) Test documentation Security guidance SFR: PP TEE: FCS_COP.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, externally-stored means stored outside the <u>Authenticator</u> boundary. In the case of L1 this <u>Authenticator</u> boundary includes the underlying	

No.	Requirement	Security Measures
2.1.9	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-6, SM-16, SM-25)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher Authenticators might offload the persistent storage of key material to components outside the Authenticator boundary if they cryptographically wrap it appropriately. Such structure containing cryptographically wrapped key material or information related to keys is called Key Handle containing a key (in WebAuthn the term Credential ID is used instead of Key Handle). If the Authenticator uses such Key Handle approach, the Authenticator SHALL verify that any Key Handle containing a key provided to the Authenticator was generated by that Authenticator using an Allowed Data Authentication or Signature Cryptographic Function; if not, then no signature using this key SHALL be generated. [U2FRawMsgs], [Section 5.1] and [UAFAuthnrCommands], [Annex A Security Guidelines, entry Wrap.sym]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the Security Target and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria)	

No.	Requirement	Security Measures
2.1.10	Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) in Package for Cryptographic Services Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_COP.1 (in case present according to the list of allowed cryptographic algorithms) Missing ASPs (as not all ASPs may be covered by the HW) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) Security Target with: FCS_COP.1, FDP_ACC.1, FDP_ACF.1 Missing ASPs (as not all ASPs may be covered by the GP TEE) needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab.	
	Calibration L1: At L1, this <u>Authenticator boundary</u> includes the underlying operating environment. L1+: At L1+, this <u>Authenticator boundary</u> includes the underlying operating environment. L2: No calibration required. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	(SM-1, SM-2, SM-16, SM-25, SM-27)
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure	

No.	{A2} The tester <u>SHALL</u> <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	Security Measures
	L3 GlobalPlatform Test Procedure The tester <u>SHALL</u> <u>verify</u> that the provided rationale and evidence meet the requirement. The tester <u>SHALL</u> <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester <u>SHALL</u> <u>verify</u> the provided rationale and documentation meets the requirement. The Tester <u>SHALL</u> <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester <u>SHALL</u> <u>verify</u> the provided rationale and documentation meets the requirement. The Tester <u>SHALL</u> <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
2.1.11	UAF; Consumer + Enterprise; TVFR; L1 and higher If the Authenticator supports the KHAAccessToken [UAFAuthnrCommands] method of binding keys to apps, then the Authenticator <u>SHALL</u> verify that the supplied KHAAccessToken is associated with the referenced Key Handle prior to using that Key Handle to generate a signature; if not, then no signature associated with this Key Handle <u>SHALL</u> be generated. [UAFAuthnrCommands], [Section 6.3.4]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	(SM-13)

No.	- Development Information (Low Level Design) - Test Documentation Requirement	Security Measures
	- Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
2.1.12	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher If the Authenticator supports the Key Handle approach, then the Authenticator SHALL verify that any Key Handle containing a key provided to the Authenticator is associated with the application parameter (U2F) or AppID (UAF) or RP ID (FIDO2) by using an Allowed Data Authentication or Signature Cryptographic Function; if not, then no signature using this key SHALL be generated. [U2FRawMsgs], [Section 5.1] and [UAFAuthnrCommands], [Section 6.3.4]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally)	(SM-1, SM-2, SM-16, SM-25, SM-27)

No.	L3 Vendor Questionnaire Requirement Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:	Security Measures
	- Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator SHALL generate an independent User Authentication Key for each registration [UAFAuthnrCommands], [Section 6.2.4]. NOTE Any User Authentication Key (Uauth) will only be used for authenticating one user account to one particular Relying Party. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	

No.	Requirement	Security Measures
2.1.13	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-2, SM-27)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher The Authenticator SHALL support Full Basic attestation (or a defined attestation method with equal or better security), or Attestation CA [WebAuthn] section 6.3.3, or ECDAAtestattestation [FIDOEdaaAlgorithm]. The attestation type "none" cannot be the only attestation type supported and "self" is excluded at L1+ and higher. If an Authenticator supports Multi-Device Credentials, attestationsSHALL be supported for the main credential and for the Device Public Key. In specific, • if it is a Multi-Device Credentials, Device Public Key Attestation must be supported. • if it is a Single-Device Credential, User Credential Attestation must be supported. An Authenticator MAY only support a single Attestation per request as long as it obeys the rules above. The Attestation Private Key SHALL only be used to sign well-formed FIDO attestation objects. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	

No.	L3/L3+ - Java Card PP (Common Criteria)	Requirement	Security Measures
2.1.14	NOT COVERED		(SM-3)
	L3 - TEE PP (GlobalPlatform) NOT COVERED		
	Calibration		
	GlobalPlatform Calibration at L3 No calibration required		
	CC Calibration at L3/L3+ No calibration required		
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).		
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.		
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)		
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code		
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code		
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.		
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.		
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.		
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.		
	VQ TP L1 L2 L2+ L3 L3+		
	UAF + U2F + FIDO2: Consumer + Enterprise; TVFP; L2 and higher		

No.	Requirement	Security Measures
2.1.15	All Authenticator User Private Keys (Uauth.priv) SHALL only be usable for generating well-formed FIDO signature assertions. [U2FImplCons], [Section 2.7] and [UAFAuthnrCommands], [Section 5.2].	(SM-1)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
	L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
	L2 Test Procedure {A2} The tester SHALL <i>conduct</i> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL <i>verify</i> that the provided rationale and evidence meet the requirement. The tester SHALL <i>execute</i> independent tests and/or a sample of vendor tests to verify the test results.	
	L3 Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results.	
VQ TP L1 L2 L2+ L3 L3+		

No.	Requirement	Security Measures
2.1.16	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher	
	In the event that an Authenticator Security Parameter is "destroyed" it SHALL be made permanently unavailable so it can never be read or used again.	
	NOTE The means by which this is accomplished is implementation and level dependent. It may be simply deleting it, overwriting it, destroying the key material used to encrypt it or other.	
	NOTE The purpose of this requirement is primarily so that a factory reset carried out by an end user before they sell or dispose of their device giving assurance that the new owner cannot re-instate authentication keys.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_CKM.4	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_CKM.4 in Package for Cryptographic Services	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_CKM.4	
	L3 - TEE PP (GlobalPlatform) Security Target with: FCS_CKM.4, and FDP_RIP.1	
	Calibration	
	L1: At L1, the Authenticator Application SHALL follow best security practices specific to the underlying operating environment for protecting the Authenticator Security Parameters against being recovered and used.	
	L1+: At L1+, the Authenticator Application SHALL follow best security practices to protect the Authenticator Security Parameters against being recovered and used (e.g. by erasing with zeroes or randoms). This characteristic will be verified as specified in section Specific Calibration for Level 1+ .	
	L2: At L2, the requirements SHALL be fulfilled by mechanisms functioning entirely inside the AROE .	
	GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP] . The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]).	
	CC Calibration at L3/L3+ L3: At L3, the means for making the Authenticator Security Parameter permanently unavailable SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards] . The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see [CEMV3-1R5]). L3+: At L3+, the means for making the Authenticator Security Parameter permanently unavailable SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards] . The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see [CEMV3-1R5]).	(SM-1, SM-24)
	L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).</i>	
	L2 Vendor Questionnaire <i>Describe how this requirement can be verified through documentation review. Please provide explicit design document references.</i>	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation	

No.	• Mapping to Companion Program Requirements • Source Code Requirement	Security Measures
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L2 and higher Authenticators might support factory reset. In the event of a factory reset, the Authenticator SHALL destroy all User-specific Secret Authenticator Security Parameters other than any Allowed Random Number Generator's state. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration L1: At L1, the Authenticator Application SHOULD use the OSes RNG if it is an Allowed RNG according to FIDOAllowedCrypto and add entropy as described in FIDOAllowedCrypto, section "Random Number Generator". Otherwise the Authenticator Application SHALL implement its own Allowed RNG using the OSes RNG and potentially other sources for seeding entropy. L1+: At L1+, if a Key Derivation Function is used and if it is not listed on the "Allowed Cryptography List" FIDOAllowedCrypto, the security strength SHALL at least be greater than or equal to 100 bits and itSHOULD be greater than or equal to 112 bits. This characteristic will be verified as specified in section Specific Calibration for Level 1+. L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	

No.	Requirement	Security Measures
2.1.17	L2 Vendor Questionnaire <i>Describe how this requirement can be verified through documentation review. Please provide explicit design document references.</i> L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-18, SM-19)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher	
	Any time the Authenticator generates an Authenticator Security Parameter which is a key for use with an algorithm specified in the "Allowed Cryptography List" [FIDOAllowedCrypto], the Authenticator SHALL generate keys as required by the standard referenced in the "Allowed Cryptography List" [FIDOAllowedCrypto] for that algorithm.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_CKM.1	
	L3 - TEE PP (GlobalPlatform) Security Target with: FCS_CKM.1, and FCS_RNG.1	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+	

No.	Requirement	Security Measures	
2.1.18	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	(SM-1, SM-16, SM-21)	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, includingDevelopment Information (High level design).		
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.		
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally)		
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code		
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code		
	L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.		
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.		
	L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.		
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.		
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.		
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.		
	VQTPL1L2L2+L3L3+		
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher		
	Any wrapped FIDO biometric data and FIDO user verification reference data that is output from the Authenticator SHALL only be able to be unwrapped by the Authenticator that produced this data.		
NOTE Cryptographic Collision would be an exception.			
Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED			
L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED			
L3/L3+ - Java Card PP (Common Criteria)			

No.	Requirement	Security Measures
2.1.19	Security Target with: FDP_ACC.2 (Firewall) FDP_ACF.1 (Firewall) and optional feature Biometric. Note: a PIN object must be owned by the TA willing to use it: firewall enforces the fact that a PIN object cannot be used by another TA. L3 - TEE PP (GlobalPlatform) Security Target with: Trusted Storage Access Control SFP (binding of TA storage to the TEE (FDP_ACC, FDP_ACF) TA Keys Access Control SFP (FDP_ACC, FDP_ACF) Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat <u>SHALL review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester <u>SHALL verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester <u>SHALL conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester <u>SHALL verify</u> that the provided rationale and evidence meet the requirement. The tester <u>SHALL execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester <u>SHALL verify</u> the provided rationale and documentation meets the requirement. The Tester <u>SHALL execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure	(SM-27)

No.	Requirement	Security Measures
	The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
2.1.20	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher Any wrapped Authenticator User Private Key (UAuth.priv) that is output from the Authenticator SHALL only be able to be unwrapped by the Authenticator that produced this data. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) Security Target with: FDP_ACC.2/Firewall FDP_ACF.1/Firewall A key object must be owned by the TA willing to use it: firewall enforces the fact that a key object cannot be used by another TA. L3 - TEE PP (GlobalPlatform) Security Target with: Trusted Storage Access Control SFP (binding of TA storage to the TEE (FDP_ACC, FDP_ACF) TA Keys Access Control SFP (FDP_ACC, FDP_ACF) Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	(SM-1, SM-6, SM-26)

No.	L1+ Test Procedure Requirement {A2} The tester SHALL <i>verify</i> that the documentation meets the requirement.	Security Measures
2.1.21	L2 Test Procedure {A2} The tester SHALL <i>conduct</i> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <i>verify</i> that the provided rationale and evidence meet the requirement. The tester SHALL <i>execute</i> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. VO - TP - L1 - L2 - L2+ - L3 - L3+ FIDO2: Consumer + Enterprise, GaVR+ : L1 and higher	
	If an Authenticator support Multi-Device Credentials, it MUST support and correctly set the Backup Eligibility and Backup State flags in the Authenticator Data. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u>, FSP and ATE and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u>, FSP and ATE and verified as part of the FIDO evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u>, FSP and ATE and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) NOT COVERED This requirement needs to be expressed in the <u>Security Target</u>, FSP and ATE, and verified as part of the FIDO evaluation by the Lab. Calibration No calibration required. L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire	

(SM-1,
SM-6,
SM-26)

No.	Requirement	Security Measures
	Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	

3.2.2 Random Number Generation

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher An Allowed Random Number Generator or Allowed Key Derivation Function SHALL be used for all key generation resulting in an <u>Authenticator Security Parameter</u> and for any random input for FIDO Relevant signature generation. An Allowed Random Number Generator or Allowed Key Derivation Function SHALL be used to generate the pinToken or pinUvAuthToken in FIDO2 if used by the authenticator. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) FCS_RNG.1 FCS_CKM.1 FCS_COP.1 L3 - TEE PP (GlobalPlatform) Security Target with: FCS_CKM.1, FCS_COP.1, FCS_RNG.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire	

No.	Provide the Security Secretariat with a rationale of how the requirement above is met. Requirement	Security Measures
2.2.1	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-16)
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher The security strength (see the relevant Allowed Deterministic Random Number Generator specification document cited in the "Allowed Cryptography List" [FIDOAllowedCrypto]) of any Authenticator's Allowed Deterministic Random Number Generator SHALL be at least as large as the largest claimed security strength of any key generated or used. If the Authenticator generates a key with an Allowed Key Derivation Function, or uses a key with parameters generated by an Allowed Key Derivation Function (see the "Allowed Cryptography List" [FIDOAllowedCrypto]), then the security level of the Allowed Key Derivation Function SHALL be at least as large as the claimed security level of they key generated or used. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	

No.	L3 - TEE PP (GlobalPlatform) Requirement	Security Measures
2.2.2	Security Target with: FCS_RNG.1	(SM-1, SM-26)
	Calibration GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher If the Authenticator adds Authenticator generated nonces and the nonces are produced randomly, then an Allowed Random Number Generator SHALL be used for nonce generation. Authenticators with unrestricted keys (i.e. Metadata Statement isKeyRestricted: false) don't exclusively control the to-be-signed message and hence have no need to generate a nonce.	

No.	Relation to Companion Program	Requirement	Security Measures
2.2.3		L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards)	(SM-16)
		L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards)	
		L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards)	
		L3 - TEE PP (GlobalPlatform) Security Target with: FCS_RNG.1	
		Calibration GlobalPlatform Calibration at L3 No calibration required	
		CC Calibration at L3/L3+ No calibration required	
		L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	
		L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	
		L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
		L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally)	
		L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
		L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
		L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.	
		L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
		L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
		L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.	
		L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	

No.	The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. Requirement	Security Measures												
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQTPL1L2L2+L3L3+													
2.2.4	UAF; Consumer + Enterprise; TVFR; L2+ and higher The Authenticator generated nonce SHALL be of sufficient length to guarantee that the probability of collision between produced Authenticator nonces for a particular User Authentication Key is less than 2^32 after the maximum number of signatures allowed to be generated using that key. If the Authenticator generated nonce value added is 16 bytes or longer, then this requirement can be considered to have been fulfilled without a separate argument. NOTE This interacts with requirement 5.4, describing the maximum possible number of signatures. <table><thead><tr><th>Bytes in Nonce</th><th>Log Base 2 of Allowed Operations</th></tr></thead><tbody><tr><td>8</td><td>16</td></tr><tr><td>9</td><td>20</td></tr><tr><td>10</td><td>24</td></tr><tr><td>11</td><td>28</td></tr><tr><td>12</td><td>32</td></tr></tbody></table> Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3 - TEE PP (GlobalPlatform) Security Target with: FCS_RNG.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQTPL1L2L2+L3L3+	Bytes in Nonce	Log Base 2 of Allowed Operations	8	16	9	20	10	24	11	28	12	32	(SM-8, SM-22)
	Bytes in Nonce	Log Base 2 of Allowed Operations												
	8	16												
	9	20												
	10	24												
11	28													
12	32													
	UAF + U2F + FIDO2; Consumer + Enterprise; L3 and higher If the Authenticator implements a Deterministic Random Number Generator, then an Allowed Physical True Random Number Generator SHALL always be													

No.	Requirement	Security Measures
	NOTE Random Numbers means non-reproducible random numbers. In the instance that reproducible values are desired, using a Key Derivation Function (KDF) is dealt with elsewhere in this requirement set. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3 - TEE PP (GlobalPlatform) Security Target with: FCS_RNG.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	2.2.5 L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally)	(SM-16)
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.	
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ - TP - L1 - L2 - L2+ - L3 - L3+ FIDO2: Consumer - Enterprise, DaD, L1 and Higher	

No.	The Device Identifier SHALL be generated by an Allowed Random Number Generator. Requirement	Security Measures
2.2.6	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_RNG.1 (TRNG, Physical RNG which support NIST or BSI standards) L3 - TEE PP (GlobalPlatform) Security Target with: FCS_RNG.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire <i>Describe</i> how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure	(SM-1, SM-26)

No.	Requirement	Security Measures
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	

3.2.3 Signature Counters

Authenticators can set the signature counter value in the assertions to "0" to indicate that signature counters are not supported.

An Authenticator that sets the signature counter to any value other than "0" "claims" to support the counter.

NOTE

If the Authenticator claims supporting signature counter(s), it **MAY** implement a single signature counter for all keys or one signature counter per key.

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1 and higher Support of Signature counters is OPTIONAL. The vendor SHALL document whether the Authenticator supports Signature Counters and if they are supported, the vendor SHALL document which of the following the authenticator implements: - one Signature Counter <i>per authentication key</i> - one (global) Signature Counter for all authentication keys (i.e. at least one counter covering multiple keys) If the Authenticator does not use a Signature counter per authentication key, the Vendor SHALL document if additional measures are implemented, for example, if the Authenticator uses a single Signature Counter and an offset per authentication key. NOTE The Vendor will provide a rationale for implementing any another mechanism satisfying this requirement. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration L1: At L1, Authenticators not running in an <u>Allowed Restricted Operating Environment (AROE)</u> [<u>FIDORestrictedOperatingEnv</u>], SHALL support signature counter(s). L1+: At L1+, Authenticators (not running in an <u>Allowed Restricted Operating Environment, AROE</u>) [<u>FIDORestrictedOperatingEnv</u>], SHALL support signature counter(s). L2: No calibration required. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire <i>Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.</i> L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).</i>	

2.3.1

(SM-15)

No.	L2 Vendor Questionnaire Requirement Provide the tester with documentation that specifies how the requirement above is met.	Security Measures
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L1 Test Procedure [A1] The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure [A2] The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure [A2] The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-2; L1 and higher If the Authenticator claims supporting signature counter(s), then the Authenticator SHALL ensure that the signature counter value <i>contained in FIDO signature assertions</i> related to one specific authentication key either - is (a) strictly greater than "0" and always has been greater than "0" for any previously generated FIDO signature assertion related to the same authentication key <i>and</i> is (b) greater than the signature counter value contained in any previously generated FIDO signature assertion related to the same authentication key, or - is set to "0" indicating that the signature counter is not supported. The signature counter can nevertheless be set to "0" when it goes into a permanent error state (counter error). NOTE Once a signature counter value <i>contained in a FIDO signature assertion</i> for one specific authentication key has been set to "0" it will stay at such value for that specific authentication key (due to the requirement 1). [U2FImplCons], [Section 2.6] and [UAFAuthnrCommands] [Section 6.3.4]. If one signature counter per authentication key is implemented (recommended option), it SHALL be incremented by 1 per signature operation. If a global signature counter is implemented, it SHOULD be incremented by a positive random number per signature operation (see [UAFAuthnrCommands] [Section A Security Guidelines, entry SignCounter]). Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	

No.	Requirement	Security Measures
2.3.2	Calibration GlobalPlatform Calibration at L3 No calibration required	(SM-15)
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the Security Secretariat with a rationale of how the requirement above is met.	
	L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the tester with documentation that specifies how the requirement above is met.	
	L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> a rationale for how the requirement above is met. <i>Provide</i> a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale.	
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.	
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ TP L1 L2 L2+ L3 L3+	

3.2.4 Backup and Syncing

This section lists the requirements for backup and syncing Credentials. Below is an overview of the feature of such a Multi-Device Credential compared to Single-Device

Feature	Single-Device Credential	Multi-Device Credential
Private Key never leaves the device	V	X
Private Key can be backed up and restored on a different Authenticator	X	V
Can Credentials be restored in case of lost or destroyed Authenticator.	X	V
Can support Device Public Key extension	V	V
Is Transparent to the RP	V	V

Table 3: Comparison of Credential Features

No.	Requirement	Security Measures
2.4.1	FIDO2; Consumer + Enterprise; DaD; L1 and higher	
	Backup Eligible Authenticator Security Parameters (BEASP) can be backed up (for example, to a cloud service) and/or restore them to another Authenticator, including Authenticators with different security parameters. An Authenticator MUST treat <u>Backup Eligible Authenticator Security Parameters</u> as Secret Authenticator Security Parameters, except for the purpose of backup and/or restore them. <u>Backup Eligible Authenticator Security Parameters</u> MAY have different Security Parameters than <u>Authenticator Security Parameters</u>. Multi-Device Credentials and any related Authenticator Security Parameters, including the Attestation Private Keys of the Synching Fabric, except for their Device Public Keys, are defined as <u>Backup Eligible Authenticator Security Parameters</u>. They are currently the only <u>Authenticator Security Parameters</u> accepted as <u>Backup Eligible Authenticator Security Parameters</u>.	
	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FDP_IFC.1, FDP_IFF.1, FDP_ITC and FDP_ETC. Define a backup/restore policy. In addition, the scope (internal AND external data transfer) needs to be verified as part of the FIDO evaluation by the Lab.	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FDP_IFC.1, FDP_IFF.1, FDP_ITC and FDP_ETC. Define a backup/restore policy. In addition, the scope (internal AND external data transfer) needs to be verified as part of the FIDO evaluation by the Lab.	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: FDP_IFC.1, FDP_IFF.1, FDP_ITC and FDP_ETC. Define a backup/restore policy. In addition, the scope (internal AND external data transfer) needs to be verified as part of the FIDO evaluation by the Lab.	
	L3 - TEE PP (GlobalPlatform) Security Target with: FDP_IFC.1 (backup and restore policy) FDP_ETC (backup rules) FDP_ITC (restore rules)	
	Calibration GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	(SM-1)
	L1 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	

No.	L3 GlobalPlatform Vendor Questionnaire Requirement Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence:	Security Measures
	- Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
	FIDO2; Consumer + Enterprise; DaD; L1 and higher An Authenticator supporting Backupable Authenticator Security Parameters MUST provide confidentiality with an Allowed Cryptographic Algorithm during transport and storage. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_COP.1 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_COP.1 L3/L3+ - Java Card PP (Common Criteria) Security Target with: FCS_COP.1 L3 - TEE PP (GlobalPlatform) Security Target with specific cryptographic requirements: FCS_CKM FCS_COP (confidentiality protection of backup data) Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	

No.	Requirement	Security Measures
2.4.2	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	(SM-1)
	L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code	
	L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	VQTPL1L2L2+L3L3+	

3.3 Authenticator's Test for User Presence and User Verification

An **External User Verification** is the same as a user verification except that its user input comes from outside the authenticator boundary. It is marked as such with an **_EXTERNAL** suffix in the User Verification Methods in the "FIDO Registry of Predefined Values" [FIDORegistry] and may appear anywhere the **USER_VERIFY** constants are used (e.g., Metadata and userVerificationMethod extension). For example, **USER_VERIFY_PASSCODE_EXTERNAL** is a **PIN** authenticator for which the **PIN** input (keyboard, touch screen or such) is outside of the authenticator boundary.

The only user verification methods that may be designated as **_EXTERNAL** are **PIN**, password, passcode and pattern. Biometric user verification may not be designated as **_EXTERNAL**.

Implementations of clientPIN and common HLOS PINs (lock screen) can be either external user verification or internal (no **_EXTERNAL** suffix) depending on where the authenticator boundary is drawn. At **L1** and **L1+** the HLOS is often inside the authenticator boundary. At **L2** and higher, since the **HLOS** is rarely inside the authentication boundary, they will typically have to be external user verification.

PIN entry is considered to provide a user presence check. While external user verification is allowed, external user presence checking is not, generally implying that a user verification that is also providing a user presence check must be inside the authenticator boundary.

NOTE

A common scenario occurs with an authenticator typically called a *security key* that has a user presence check that is inside the authenticator boundary, but relies on the CTAP clientPIN for user verification. It would thus declare **USER_VERIFY_PASSCODE_EXTERNAL** and **USER_VERIFY_PRESENCE** in its metadata or **UVM** extension and is certifiable at **L2** and higher.

NOTE

Some may consider external user verification methods to have different security characteristic from those that are not.

Also see the "FIDO Technical Glossary" [FIDOGlossary]. The definitions here are normative and take precedence over those in the FIDO Glossary.

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher	

No.	Requirement	Security Measures
3.1	If the Authenticator indicates it can perform or has performed a user presence check, the Authenticator shall provide a mechanism to obtain a gesture or action from the user establishing the user authorizes the given authentication action. For U2F, indication is by the user presence bit in the Authentication Response Message (see [U2FRawMsgs]). In UAF, this is indicated by USER_VERIFY_PRESENCE being set in the USER_VERIFY flags defined in the "FIDO Registry of Predefined Values" [FIDORegistry]. This indication may appear in the VerificationMethodDescriptor in the metadata for the authenticator. It may also appear in the userVerificationMethod extension (fido.uaf.uvm) [UAFRegistry] in either a registration assertion (TAG_UAFV1_REG_ASSERTION) or an authentication assertion (TAG_UAFV1_AUTH_ASSERTION). If it is indicated in the metadata and the userVerificationMethod extension is present, it must also be indicated in the extension. It is not allowed for the metadata to indicate USER_VERIFY_PRESENCE and for there to be no user presence check performed (see [UAFAuthnrCommands], [UAFAuthnrMetadata]). In FIDO2 this is indicated by the "up"=1 flag in the MakeCredential or GetAssertion responses (see [FIDOCTAP]). NOTE This requirement prevents remote attacks. The user has to confirm an action by pressing a button or providing some other (physical) gesture. NOTE A user presence check could be implicit as part of a user verification such as the case with a fingerprint Authenticator where the user always performs an action. A user presence check could also be part of but separate from an authentication such having to push a button at the same time face recognition is happening. It can also just be a simple push of a button with no user verification at all. NOTE Any user verification method that implicitly performs a user presence check must explicitly indicate that it does, or it will be assumed that it does not. For example, all fingerprint Authenticators should indicate they perform user presence check by setting "up"=1 for FIDO2 and USER_VERIFY_PRESENCE for UAF. NOTE The metadata indication of support for user presence check is irrelevant for certification for U2F and FIDO2, but not UAF. Metadata is the only way for UAF implementations that do not support the fido.uaf.uvm extension to indicate support for user presence check to the relying party.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria)	
	NOT COVERED	
	L3 - TEE PP (GlobalPlatform)	
	PARTIALLY COVERED by the use of TUIPP-module or BIO PP-module. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab.	
	Calibration	
GlobalPlatform Calibration at L3		
No calibration required		
CC Calibration at L3/L3+		
No calibration required		
All Levels Vendor Questionnaire		
This requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.		
All Levels Test Procedure		
The Security Secretariat SHALL <i>verify</i> the requirement during Interoperability Testing.		
VQ TP L1 L2 L2+ L3 L3+		
UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher		

UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher

No.	Requirement	Security Measures
3.2	For FIDO2, if an Authenticator indicates "uv"=1 in either a GetAssertion or a MakeCredential, then the Authenticator MUST have a mechanism to verify the user and have performed user verification or have accepted and verified the pinAuth parameter. (see [FIDOCTAP]). Similarly, for UAF, if an Authenticator indicates it performed user verification in either a registration or authentication by way of the User Verification Method Extension (fido.uaf.uvm) [UAFRegistry], it MUST have performed a user verification. If either a UAF, U2F or FIDO2 authenticator supplies metadata, it MUST correctly indicate how it supports user verification in the <code>userVerificationDetails</code> field [FIDOMetadataStatement]. If it is capable of performing user verification, it must list at least one alternative that is a user verification (e.g., one that is not just <code>USER_VERIFY_PRESENCE</code> or <code>USER_VERIFY_NONE</code> [FIDORegistry]). It must list all the user verification alternatives for all the types it supports. If either a UAF, U2F or FIDO2 authenticator supplies metadata and implements a mode where no user verification is performed or might not be performed, it MUST list one user verification as <code>USER_VERIFY_NONE</code> in the metadata. (All FIDO2 and U2F 1.2 Authenticators are like this. UAF Authenticators can be like this, but almost never are.) NOTE The definition of user verification in the "FIDO Technical Glossary" [FIDOGlossary] considers user presence check to be a form of user verification. That definition is not applicable for this requirement. NOTE See note above on explicitly indicating User Presence for Authenticators that intrinsically perform User Presence as a part of User Verification. NOTE This requirement does not, nor any other requirement, guarantee that user verification is always performed when FIDO2 MakeCredential or UAF registration happens. If a relying party wants this behavior, then it must make sure that it requests it during those operations or that the authenticator does not indicate <code>USER_VERIFY_NONE</code> in its metadata. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) PARTIALLY COVERED by the use of TUIPP-module or BIOPP-module. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required All Levels Vendor Questionnaire This requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. All Levels Test Procedure The Security Secretariat SHALL verify the requirement during Interoperability Testing. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-5)
3.3	3.3 was removed. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2: Consumer + Enterprise: GaVR-1: L1 and higher A time period after a successful user verification, user presence check or both is defined as the <i>cached period</i>. During the cached period the user verification and/or presence check stays valid and the authenticator can perform multiple operations such as registration, generating authentication assertions, enrolling new biometrics without further user verification or presence check. The cached period starts when user verification and/or presence check completes successfully. A cached period is one of three types: 1. user verification 2. user presence check 3. user verification and user presence check A cached period's type is set when it starts and cannot be changed. If another type is needed, a new user verification and/or presence check must be performed; all timeouts and the associated relying party reset.	

No.	The time from the start of the cached period until the first authenticator operation starts is the <i>time-to-start</i> and has a maximum: Requirement	Security Measures
	• The maximum time-to-start the authenticator reports to the relying party in a FIDO protocol response message. • If no report to the relying party, the fixed maximum time-to-start the authenticator lists in its metadata. • If none of the above, a base value of 30 seconds. The time from the start of the cached period until the last authenticator operation completes is the <i>time-to-complete</i> and has a maximum: • The maximum time-to-complete the authenticator reports to the relying party in a FIDO protocol response message. • If no report to the relying party, the fixed maximum time-to-complete the authenticator lists in its metadata. • If none of the above, a base value of 10 minutes. During the cached period, multiple operations (e.g. CTAP methods), may be invoked in the authenticator. A relying party is associated with each cached period. This may be set when it is first created. If not set explicitly when created, then it is set to the first relying party the cached period is used with. If a subsequent operation is invoked for a different relying party, the authenticator must either reject that operation or initiate a new cached period by performing a new user verification and/or presence check. Only one use of the cached user presence check is allowed. Once it is used, a new user presence check must be performed. Usage of the cached user presence, immediately ends the cached period. Any authenticator-external identifier (e.g., pinUvAuthToken) used by a client to refer to a particular cached period instance must be unique for that the authenticator (See also requirement 2.2.1). NOTE This requirement is general and applies to all user verification and/or user presence check caching mechanisms. It covers pinToken, pinUvAuthToken, future mechanisms, proprietary mechanisms and so on. This requirement is general and applies to any FIDO protocol mechanisms or extensions for the relying party to request a particular timeout and for the authenticator to report the timeout in effect. This requirement applies to existing mechanisms like UserVerificationCaching, modifications to UserVerificationCaching or any future mechanisms or extensions, either standardized or proprietary. This requirement is designed to work equally for authenticators that do user verification, biometric enrollment and credential management within the authenticator boundary as for authenticators that use External User Verification (collect PIN input outside the authenticator boundary). NOTE To follow this requirement, an authenticator must either adhere to the base maximum timeout values, report a different value in the metadata or report a different value in FIDO protocol messages. For operations like biometric enrollment that do not associate a relying party, timeouts are either fixed as described in the metadata or are the base values. As of the initial writing of this requirement (January 2020), there are no metadata fields to report the time-to-start or the time-to-complete. There is only one protocol mechanism, UserVerificationCaching, and it only allows selecting and reporting time-to-complete only for UAF. Until additions are made to the metadata statements or UserVerificationCaching is defined for FIDO2 or such, all certified FIDO2 implementations must implement only the base values and there is no way for the relying party to request otherwise. It is allowed for the authenticator to implement additional timeouts such as a lack-of-activity timeout that expires after 30 seconds of receiving no CTAP commands as long as the above requirements are still met. These timeouts are maximums. An authenticator may use shorter timeouts. If an authenticator uses shorter timeouts it does not need to report them to the relying party. The purpose of the maximum time-to-start is to be sure the user can know that they are authorizing for a particular relying party and only that relying party. For example, they might verify for a transaction for First Bank. Something may go wrong with that transaction with no assertion generated for it. If there is no maximum time-to-start, many minutes later, an assertion for Second Bank might be generated without any user verification required. The purpose of the maximum time-to-complete is to limit the time for which authentication is valid for the associated relying party. To give an example of what happens without this timeout, an attacker may come to "own" the non-authenticator part of a user's phone that was used to log in to a bank. That attacker would be able to log back into that bank for hours or days. The bank's server timeouts do not help because the attacker can just re-authenticate. The 10-minute base value for time-to-complete is for two reasons. The first is to allow biometric enrollment, which may involve a number of steps to complete. The second is to accommodate worst-case scenarios such a slow and simple authenticator working with a large number of credentials over a slow CTAP connection that might take as much as 10 minutes to complete. The FIDOCTAP specification has text discussing the lifetime of getting a pinToken from the authenticator, suggesting they can be generated once at power up implying no timeouts are necessary. To pass certification, even at L1, the timeouts described here are required. Some may consider these timeouts to be of little benefit for authenticators using External User Verification because the attacker outside the authenticator boundary can capture and replay the PIN whenever the timeout goes off to renew their authentication. While this is true, not all authenticators collect the PIN outside the authenticator boundary and it is simpler to have a uniform timeout requirement for all authenticators. NOTE The first operation in a cached period may have no associated relying party (e.g. a biometric enrollment). It is currently allowed for subsequent authenticator operations for the same cached period to then have an associated relying party. For example, the user might initiate and complete a biometric enrollment in 5 minutes and then 4 minutes later authenticate to a relying party. There would be a user verification when the biometric enrollment started, but not necessarily for the authentication to the relying party. Similar is true when the relying party operation is first. Note that this gives a 10-minute window after the start of a biometric enrollment for an attacker controlling the platform to generate authentications for one relying party. This non-requirement allows for biometric enrollment and registration with a relying party to be performed in line / together and require only one user verification. NOTE The CTAP specification refers to the authenticator-external identifier as the pinToken or pinUvAuthToken, a randomly generated byte string whose length is a multiple of 16 bytes. Some versions of the CTAP specification say it should be generated once on power up. For certification, this is not allowed. It must be a new identifier for each cached period. Multiple cached periods (e.g., pinUvAuthTokens) are allowed simultaneously, but not required. See also requirement 2.2.1 which requires the identifier be generated with a certified random number generator.	

No.	Relation to Companion Program	Requirement	Security Measures
3.4		L3/L3+ - IC PP (Common Criteria) NOT COVERED	(SM-5)
		L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
		L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
		L3 - TEE PP (GlobalPlatform) NOT COVERED	
		Calibration	
		L1: At L1, the Authenticator Application SHALL follow best security practices specific to the underlying operating environment to enforce the cached periods.	
		L1+: At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment. This characteristic will be verified as specified in section Specific Calibration for Level 1+ .	
		L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE .	
		GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP] . The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]).	
		CC Calibration at L3/L3+ No calibration required	
		L1 Vendor Questionnaire <i>Provide the Security Secretariat with a rationale of how the requirement above is met.</i> At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.	
		L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).</i>	
		L2 Vendor Questionnaire <i>Provide a rationale for how the requirement above is met.</i> <i>Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.</i>	
		L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Partner Program Requirements • Source Code	
		L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Partner Program Requirements • Source Code	
		L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Partner Program Requirements • Source Code	
		L1 Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing.	
		L1+ Test Procedure	

No.	Requirement	Security Measures
	{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> the provided rationale and evidence meets the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
3.5	UAF; Consumer + Enterprise; GaVR-1; L1 and higher 3.5 was removed. VQ TP L1 L2 L2+ L3 L3+	
3.6	UAF; GaVR-1; L1 and higher 3.6 was removed. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; L2 and higher All Authenticator user input and output must be protected from data injection, disclosure, modification or substitution through use of a Trusted Path. This trusted path SHALL allow a user to communicate directly with the Authenticator, SHALL only be able to be activated by the Authenticator or the user, and cannot be imitated by software outside of the AROE. At some certifications levels an exception is made to this requirement for <u>external user verification</u>. See the calibration for this requirement. UAF Transaction Confirmation only has to adhere to this requirement and use a trusted path when it sets either the TRANSACTION_CONFIRMATION_DISPLAY_TEE or TRANSACTION_CONFIRMATION_DISPLAY_HARDWARE flag in tcDisplay. There is no exception for FIDO2 Transaction Authorization Extensions [WebAuthn]. NOTE All Authenticators have a need to accept user input or provide user output except those that are Silent Authenticators [FIDOGlossary] or exclusively implement <u>external user verification</u>. For instance, plaintext ASPs may be entered into or output from the Authenticator in an encrypted form (e.g. display text digitally signed). This means that any user output performed under this requirement needs to be protected from a display overlay attack. The exception for external user verification methods is only for the user input and output. Stored / enrolled reference data (templates) and the comparison of the input to these <u>must still</u> be protected per requirements at the required calibration level. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) OPTIONALLY COVERED if TUI PP-Module or BIO PP-Module is used (if the Authenticator is not Silent), covered by the AROE Security Target (the input/output from/to the user should be provided through the AROE's TUI and/or biometric system). Calibration L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE. Authenticators may implement <u>external user verification</u>. If they do so, they must indicate so in both the metadata and in the <u>UVM</u> extension. Calibration at L2 At L2, Authenticators may implement external user verification. If they do so, they must indicate so in both the metadata and in the UVM extension. At L2, a dedicated screen for the Authenticator, not connected to and not usable by anything outside the <u>Authenticator Boundary</u>, is accepted as a	

No.	Requirement	Security Measures
3.7	GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see [CEMV3-1R5]). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see [CEMV3-1R5]). L2 Vendor Questionnaire Provide the tester with documentation that specifies how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	(SM-5, SM-10, SM-29)
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1 and higher If the Authenticator claims to accept any input from the user, then the Authenticator SHALL protect against injection or replay of user verification data (e.g. password, PIN, biometric data and such) and/or the user presence check signal. When we say "the Authenticator claims to accept any input from the user", we mean that the Authenticator declares a user verification or user presence check method other than <u>external user verification methods</u>. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is not fully covered by the PP and needs to be provided by the Authenticator Application additionally to the Security Target with	

No.	Requirement	Security Measures
	FPT_PHP.3 "Resistance to physical attack". This requirement needs to be expressed in the Security Target and verified as part of the FIDO evaluation by the Lab. L3/L3+ - 3S in SoC PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is not fully covered by the PP and needs to be provided by the Authenticator Application additionally to the Security Target with FPT_PHP.3 "Resistance to physical attack". This requirement needs to be expressed in the Security Target and verified as part of the FIDO evaluation by the Lab. L3/L3+ - Java Card PP (Common Criteria) PARTIALLY COVERED This FIDO requirement is not fully covered by the PP and needs to be provided by the Authenticator Application additionally to the Security Target with FAU_ARP.1 "Security Alarms". This requirement needs to be expressed in the Security Target and verified as part of the FIDO evaluation by the Lab. L3 - TEE PP (GlobalPlatform) OPTIONALLY COVERED if TUIPP-Module or BIO PP-Module is used, covered by the AROE Security Target with the SFR FTP_TRP.1. Calibration L1: At L1, the Authenticator Application SHALL follow best security practices specific to the underlying operating environment for protecting against injection or replay of FIDO user verification or user presence checkdata. This especially means that the Authenticator Application SHALL NOT provide any API for injecting FIDO user verification or user presence data. L1+: At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment and it SHALL implement software protection techniques to protect against replay and injection (e.g. obfuscation and anti-tracing). This characteristic will be verified as specified in section Specific Calibration for Level 1+. L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the AROE. Authenticators may implement external user verification methods. If they do so, they must indicate so in both the metadata and in the UVM extension, if supported. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see [CEMV3-1R5]). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see [CEMV3-1R5]).	
3.8	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire	(SM-5, SM-27)

No.	Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: Requirement	Security Measures
	- Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1 and higher Authenticators implementing user verification methods other than user presence check [FIDOGlossary], SHALL rate-limit user verification attempts in order to prevent brute-force attacks. [FIDOMetadataStatement], sections 3.1, 3.2, 3.3 and [UAFAuthnrCommands], Appendix A Security Guidelines, entry "Matcher". The overarching requirement is based on an upper limit for the probability of a successful brute-force attack. The upper limits specified in "calibration" below. For the purposes of this requirement, a brute-force attack is defined as follows: The attacker tries all possible input combinations (e.g. passwords, PINs, patterns, biometrics...) in order to pass the user verification. In the case of biometric user verification, the attacker brings a potentially unlimited number of "friends" that can try whether their biometric characteristic is accepted (as false accept). In all cases the number of trials per time is limited by the verification speed of the authenticator and the integrity of the authenticator is not violated (e.g. no decapping of chips, no malware, ...) - since there are other requirements dealing with such attacks. NOTE - The rate limiting requirement applies to all user verification methods (other than user presence check). - The below calibration of the rate limiting for the different levels is expressed as a formula that expresses the chance a false input is accepted in a determined time period. The chance that your UV method accepts a false input (ie, randomly guessing the correctPIN, the FAR of a fingerprint, ...) times the allowed number of attempts in that period must be smaller or equal to this chance. Because of how the formula is constructed, you can allow a certain number of tries and then block without keeping time, as long as that puts the chance below the 170/10000. Note that if you increase the time period, the allowed chance will increase too but the higher you go in levels, the smaller the chance is per time period. - Implementing a more strict rate limiting method is allowed. - The rate limits were set to accommodate certain mobile phone PIN settings and are considered way too lax, which is why we recommend a much higher standard below. - We <i>recommend</i> - Allowing up to 3 failed user verification attempts without any penalty and then imposing a delay of at least 30 seconds before the 4th one, increasing exponentially with each successive attempt (e.g., 1 minute before the 5th one, 2 minutes before the 6th one), or - Disable the biometric user authentication and offer another factor (e.g., a different biometric modality or a PIN/Passcode if it is not already a required factor) if such an alternative method is already available after the 16th failed user verification attempt. Disabling the first user verification method and falling back to an alternative user verification method MAY take place at any time without imposing additional delays. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	

No.	L3/L3+ - Java Card PP (Common Criteria) Requirement	Security Measures
3.9	NOT COVERED L3 - TEE PP (GlobalPlatform) PARTIALLY COVERED Security Target with: FPT_STM.1 (if the implementation relies on AROE time stamp services) This requirement needs to be provided by the Authenticator Application. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab.	
	Calibration L1: At L1, the time dependent probability of a successful <u>brute-force attack</u> on the authenticator SHALL be $P(t) \leq \text{maximum}(170/10000, (24 \cdot t + 16) / 10000), \text{ with } t \text{ being the time in days.}$ For a 4 digit PIN it means up to 170 non-biometric user verification attempts in the first 6.4 days and then at least one hour delay per one of them. For a 6 digit PIN it means up to 17000 non-biometric user verification attempts in the first 6.4 days and then at least 1 hour delay per 100 of them. For a biometric, the FAR times the number of allowed attempts must be smaller than 0.017 for the first 6.4 days. After those 6.4 days, the allowed chance will increase. L1+: At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment and it SHALL implement software protection techniques to protect the implementation of the measure (e.g. obfuscation and anti-tampering). The time dependent probability of a successful <u>brute-force attack</u> on the authenticator SHALL be $P(t) \leq \text{maximum}(170/10000, (12 \cdot t + 16) / 10000), \text{ with } t \text{ being the time in days.}$ For a 4 digit PIN it means up to 170 non-biometric user verification attempts in the first 12.8 days and then at least a two hour delay per one of them. For a 6 digit PIN it means up to 17000 non-biometric user verification attempts in the first 12.8 days and then at least a two hour delay per 100 of them. For a biometric, the FAR times the number of allowed attempts must be smaller than 0.017 for the first 12.8 days. After those 12.8 days, the allowed chance will increase. L1+: This characteristic will be verified as specified in section <u>Specific Calibration for Level 1+</u>. L2: At L2, the time dependent probability of a successful <u>brute-force attack</u> on the authenticator SHALL be $P(t) \leq \text{maximum}(170/10000, (12 \cdot t + 16) / 10000), \text{ with } t \text{ being the time in days.}$ For a 4 digit PIN it means up to 170 non-biometric user verification attempts in the first 12.8 days and then at least a two hour delay per one of them. For a 6 digit PIN it means up to 17000 non-biometric user verification attempts in the first 12.8 days and then at least a two hour delay per 100 of them. For a biometric, the FAR times the number of allowed attempts must be smaller than 0.017 for the first 12.8 days. After those 12.8 days, the allowed chance will increase. At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the Authenticator Boundary, i.e. inside the <u>AROE</u>.	
	GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]).	(SM-1, SM-5, SM-27)
	CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5)). Note This implies that an attack potential calculation should be undertaken to determine what the actual rate limit should be to meet the requirement at the level. It is likely to be more restrictive for the end user than the rate described in the requirement text. L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5)). Note This implies that an attack potential calculation should be undertaken to determine what the actual rate limit should be to meet the requirement at the level. It is likely to be more restrictive for the end user than the rate described in the requirement text.	
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Provide a rationale for how the requirement above is met.	
	Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit	

No.	Requirement	Security Measures
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L2+ and higher	

No.	Requirement	Security Measures
3.10	If the authenticator supports biometric user verification (e.g. fingerprint, face recognition, etc.), then the authenticator biometric component SHALL be certified according to BioLevel 1+ or BioLevel 2+, as defined in [FIDO Biometrics Requirements]. The Level Calibration, correspondence to Companion Programs, Vendor Questionnaires, and Test Procedures for this requirement are all specified in [FIDO Biometrics Requirements]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 Refer to [CAFVM], [FSDPP] and [BEAT] CC Calibration at L3/L3+ L3: Refer to [CAFVM], [FSDPP] and [BEAT]. L3+: Refer to [CAFVM], [FSDPP] and [BEAT]. L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - FIDO Biometric Evaluation Report L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - FIDO Biometric Evaluation Report L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-5, SM-27)
	UAF + FIDO2; Consumer + Enterprise; TVFR; L1 and higher A FIDO authenticator MUST indicate it supports user verification in its GetInfo response if at any time it indicates it performed user verification in a FIDO2 MakeCredential or GetAssertion response (see [FIDOCTAP]), or in a UAF authentication or UAF registration response. (see [UAFProtocol]) If an authenticator indicates it always performs user verification in its metadata statement then it must always indicate it performs user verification in its GetInfo response. Indication that user verification is always performed in the metadata is by way of setting one or more of the defined bits for the different types of user verification (e.g., setting USER_VERIFY_FINGERPRINT). That is, setting any bit other than USER_VERIFY_PRESENCE, USER_VERIFY_NONE or USER_VERIFY_ALL. (see [UAFAuthnrCommands], [UAFAuthnrMetadata]) If an authenticator indicates it supports user verification in its GetInfo response then it MUST always indicate that in its GetInfo response until factory reset is performed. If an authenticator indicates it supports user verification in its GetInfo response, it MUST perform user verification before these three operations: - Enabling additional user verification methods. - Adding, changing or removing user verification reference data (e.g. PIN or biometric templates). - Un-enrolling or removing credentials. NOTE This requirement is to ensure that authentication keys created under the control of one set of user verification data stay under control of the that set until factory reset, even through expansion of that set of user verification data through additional verification data and methods.	

No.	Requirement	Security Measures
3.11	NOTE This requirement assumes there is only one set of user verification reference data per authenticator and every biometric template, PIN and such is equivalent. NOTE If any one of the authenticator's user verification methods is an external user verification, this may be used to allow changing the user verification reference data of a user verification method inside the authenticator boundary. Some relying parties may consider this to reduce the security of the user verification methods inside the authenticator boundary.	(SM-1, SM-5)
	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required.	
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing.	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	

No.	Requirement	Security Measures
	The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ TP L1 L2 L2+ L3 L3+	

3.4 Privacy

No.	Requirement	Security Measures
4.1	UAF + U2F + FIDO2; Consumer; GaVR-1; L1 and higher An Authenticator SHALL NOT have any Correlation Handle that is visible across multiple Relying Parties. If the authenticator puts the exact identical attestation key into a group of Authenticators (e.g., group of devices, phones, security keys...) so that the attestation key doesn't become a Correlation Handle, then each group of Authenticators MUST be at least 100,000 in number. If less than 100,000 Authenticators are made, then they MUST all have the same attestation key. NOTE The goal of this requirement is that, for privacy reasons, the Authenticator will not leak information about the user across multiple Relying Parties by sharing a <u>Correlation Handle</u>. This requirement specifically applies to KeyIDs/CredentialIDs, KeyHandles etc. The public key used to verify a signed attestation, or the key ID of the public key used to verify an attestation becomes a Correlation Handle when it is unique per Authenticator and used with an attestation scheme like Full Basic Attestation. One approach to mitigate this is to use the identical key in 100,000 or more authenticators. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: <u>Development Information</u> (Architecture and Interfaces) <u>Test Documentation</u>	(SM-23)

No.	- Mapping to Companion Program Requirements - Source Code (optionally) Requirement	Security Measures
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer; GaVR-1; L1 and higher An Authenticator SHALL NOT provide information to one Relying Party that can be used to uniquely identify that Authenticator instance to a different Relying Party. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.	

No.	Requirement	Security Measures
4.2	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-23)
	UAF + FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher An external party with two (AAID, KeyID) / (AAGUID, CredentialID) tuples produced using the Authenticator SHALL NOT be able to establish that they were produced using the same Authenticator. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_RNG.1 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_RNG.1 Note 1: PP0117 introduces a concept of Root-of-Trust with a specific T-Insecure-State and associated objectives and SFRs. Note 2: The O.Identification objective is added in PP0117. Note 3: P.Gen-Unique-ID in PP0117 replaces and extends P.Process-TOE in PP0084 L3/L3+ - Java Card PP (Common Criteria)	

No.	Security Target with: FCS_RNG.1	Requirement	Security Measures
4.3	L3 - TEE PP (GlobalPlatform) Security Target with: FCS_RNG.1		(SM-23)
	Calibration GlobalPlatform Calibration at L3 No calibration required		
	CC Calibration at L3/L3+ No calibration required		
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.		
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).		
	L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.		
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: <u>Development Information</u> (Architecture and Interfaces) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code (optionally)		
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: <u>Development Information</u> (High Level Design) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code		
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: <u>Development Information</u> (Low Level Design) <u>Test Documentation</u> - Mapping to Companion Program Requirements - Source Code		
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.		
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale.		
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.		
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.		
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.		
VQ TP L1 L2 L2+ L3 L3+			

No.	Requirement	Security Measures
4.4	UAF; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator's response to a "Deregister" command SHALL NOT reveal whether the provided KeyID was registered. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure	(SM-23)

No.	Requirement	Security Measures
	The tester SHALL <i>verify</i> that the provided rationale and evidence meet the requirement. The tester SHALL <i>execute</i> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
4.5	UAF+U2F; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator's response to any command (e.g. an "Authenticate") SHALL NOT reveal whether a key was registered for the given AppID / RP ID without the Authenticator either (1) requiring a KeyID / Credential ID as input or (2) verifying the user (using a method other than user presence check) - unless the authenticator registered a key to that entity. NOTE This requirement is intended to avoid third parties having physical access to an Authenticator to determine the AppIDs/RP IDs the Authenticator has been registered to - without having user consent. This means that Authenticators that (a) persistently store the Uauth key pair inside the Authenticator boundary and (b) that implement <i>no</i> user verification or <i>only</i> implement user presence check need to provide a response that cannot be distinguished from a valid authentication response. Such Authenticators could maintain a dedicated Uauth key pair for generating responses for unknown AppIDs / RP IDs. The corresponding public key shall never leave the Authenticator (since with knowledge of the corresponding public key the response could be distinguished from a response for a registered AppID / RP ID). Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 At L3 GlobalPlatform, the protection against timing attacks SHALL be strong enough to resist attackers with Enhanced-basic attack potential (see [!TEE-PP]). The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [!TEE-PP] and [!TEE-EM]). CC Calibration at L3 At L3, the protection against timing attacks SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [!AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see [!CEMV3-1R5]). CC Calibration at L3+ At L3+, the protection against timing attacks SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [!AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see [!CEMV3-1R5]). L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire	SM-5

No.	Requirement	Security Measures
	• Development Information (Architecture and Interfaces) • Test Documentation • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Test Documentation • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. The Tester shall conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester shall conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. The Tester shall conduct vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher	

No.	Requirement	Security Measures																			
4.6	The Authenticator SHALL implement the CredProtect extension.	SM-5																			
	Relation to Companion Program																				
	L3/L3+ - IC PP (Common Criteria) NOT COVERED																				
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED																				
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED																				
	L3 - TEE PP (GlobalPlatform) NOT COVERED																				
	Calibration																				
	GlobalPlatform Calibration at L3 No calibration required																				
	CC Calibration at L3/L3+ No calibration required																				
	All Levels - Vendor Questionnaire This requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required.																				
All Levels - Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing.																					
VQ TP L1 L2 L2+ L3 L3+																					
FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher																					
Depending on the CredProtect Level of the created Credential, an Authenticator SHALL NOT reveal certain information. This includes in the protocol response, on any display the authenticator may have or any other method.																					
Presence of credentials																					
If the credential was created with the userVerificationOptionalWithCredentialIDList option, the Authenticator SHALL NOT reveal whether a key was registered for the given RP ID without the Authenticator either (1) requiring a Credential ID as input or (2) verifying the user (using a method other than user presence check).																					
If the credential was created with the userVerificationRequired option, the Authenticator SHALL NOT reveal whether a key was registered for the given RP ID without the Authenticator verifying the user (using a method other than user presence check).																					
User fields																					
If the Credential was created with the userVerificationOptionalWithCredentialIDList, userVerificationRequired or userVerificationOptional option, the Authenticator SHALL NOT reveal Name, DisplayName and Icon of a User without verifying the user (using a method other than user presence check). The User ID field MAY be returned if a signature is returned.																					
RP fields.																					
If the Credential was created with the userVerificationRequired option, the Authenticator SHALL NOT reveal ID, Name and Icon of a RP without verifying the user (using a method other than user presence check).																					
If the Credential was created with the userVerificationOptionalWithCredentialIDList, the Authenticator SHALL NOT reveal ID, Name and Icon of an RP without either (1) requiring a Credential ID as input or (2) verifying the user (using a method other than user presence check).																					
If the Credential was created with the userVerificationOptional option, the Authenticator MAY reveal Name, DisplayName and Icon of an RP without verifying the user.																					
NOTE If User Verification is NOT performed this comes down to:																					
<table><tr><th>Information</th><th>userVerificationRequired</th><th>userVerificationOptionalWithCredentialIDList</th><th>userVerificationOptional</th></tr><tr><td>Presence of credentials</td><td>No</td><td>If provided in the credential list</td><td>Yes</td></tr><tr><td>User Name, User DisplayName, User Icon</td><td>No</td><td>No</td><td>No</td></tr><tr><td>User ID</td><td>No</td><td>If provided in the credential list</td><td>Yes</td></tr><tr><td>RP ID, RP Name and RP Icon</td><td>No</td><td>If provided in the credential list</td><td>Yes</td></tr></table>		Information	userVerificationRequired	userVerificationOptionalWithCredentialIDList	userVerificationOptional	Presence of credentials	No	If provided in the credential list	Yes	User Name, User DisplayName, User Icon	No	No	No	User ID	No	If provided in the credential list	Yes	RP ID, RP Name and RP Icon	No	If provided in the credential list	Yes
Information	userVerificationRequired	userVerificationOptionalWithCredentialIDList	userVerificationOptional																		
Presence of credentials	No	If provided in the credential list	Yes																		
User Name, User DisplayName, User Icon	No	No	No																		
User ID	No	If provided in the credential list	Yes																		
RP ID, RP Name and RP Icon	No	If provided in the credential list	Yes																		
NOTE This requirement does not specify a default for the CredProtect value because this depends on the version of the technical specification. Because the CredProtect extension was defined after the initial spec (FIDO_2_0) was released, the default is userVerificationOptional as this is the behavior specified in that spec. With this default, it is possible to implement the CredProtect extension without violating the initial spec.																					

No.	Once a new specification is released (or at least defined), we can either define the default here provided we link it to the technical spec version identifier or we can leave the definition of the default up to the technical spec.	Security Measures
4.7	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire <i>Provide the Security Secretariat with a rationale of how the requirement above is met.</i> At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).</i> L2 Vendor Questionnaire <i>Provide a rationale for how the requirement above is met.</i> <i>Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.</i> L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A0} The Security Secretariat SHALL verify the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement.	(SM-5, SM-10)

No.	The tester SHALL <i>execute</i> independent tests and/or a sample of vendor tests to verify the test results. Requirement	Security Measures
	L3 Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
4.8	UAF; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator SHALL NOT reveal the stored username(s) (UAF) prior to verifying the user. [UAFAuthnrCommands], Section 6.3.4. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	(SM-5, SM-10)

No.	Requirement	Security Measures
	L1 Test Procedure {A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
4.9	UAF; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator SHALL NOT output unencrypted AppIDs or KeyIDs that are associated with a Key Handle prior to verifying the user. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	(SM-5, SM-23)

No.	Requirement	Security Measures
	- Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
	FIDO2; Enterprise; GaVR-1; L1 and higher An Authenticator SHALL NOT have any Correlation Handle that is visible across multiple Relying Parties, except the unique identifier present in the Enterprise Attestation Certificate or the Enterprise Attestation Certificate itself. NOTE The goal of this requirement is that, for privacy reasons, the Authenticator will not leak information about the user across multiple Relying Parties by sharing a <u>Correlation Handle</u>, except what is available through Enterprise Attestation. This requirement specifically applies to KeyIDs/CredentialIDs, KeyHandles etc. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire	

No.	Provide the Security Secretariat with a rationale of how the requirement above is met. Requirement	Security Measures
4.10	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-23)
	FIDO2; Consumer; GaVR-1; L1 and higher The Authenticator SHALL NOT support Enterprise Attestation. If the firmware supports Enterprise Attestation, it shall be disabled through the Security Configuration of the Authenticator in such a way only the vendor or its delegates can enable it. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform)	

No.	Requirement	Security Measures
4.11	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-5, SM-23)
	FIDO2; Enterprise; GaVR-1; L1 and higher The FIDO2 Enterprise Attestation feature, mode 1, allows the Authenticator to be configured with a RP ID list. Authenticators that do not support mode 2 will fall back to mode 1 when mode 2 is requested for compatibility reasons, this requirement also applies in that case. The Authenticator MUST NOT return an Enterprise Attestation for <u>RP IDs</u> not on this list.	

No.	Requirement	Security Measures
4.12	An Authenticator MAY require additional conditions before returning an Enterprise Attestation. This list MUST contain only RP IDs owned by the Customer or its Data Processors (as defined by the GDPR). This RP ID list MUST only be modifiable by the Vendor or its delegates, specifically, it MUST NOT be modifiable by the Customer. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A1} The Security Secretariat SHALL review the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.	(SM-5, SM-23)

No.	Requirement	Security Measures
	L3 Test Procedure	
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	L3+ Test Procedure	
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ TP L1 L2 L2+ L3 L3+	

3.5 Physical Security, Side Channel Attack Resistance and Fault Injection Resistance

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L2 and higher	

No.	Requirement	Security Measures
5.1	The vendor SHALL document the physical security and side channel attack protections used by the Authenticator.	(SM-1, SM-20, SM-24, SM-26, SM-29)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) Security Target with: ADV_TDS, ADV_ARC.1	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ADV_TDS, ADV_ARC.1 Note: in PP0117 the T.RND threat is extended to cover active manipulation of the entropy source and not only its analysis	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: ADV_TDS, ADV_ARC.1	
	L3 - TEE PP (GlobalPlatform) Security Target with: Development information (architecture and interfaces), Security Guidance	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L2 Vendor Questionnaire <i>Provide the tester with documentation that specifies how the requirement above is met.</i>	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code	
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code	
	L2 Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	
	VQ TP L1 L2 L2+ L3 L3+	
UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1+		

No.	Requirement	Security Measures
5.1.1	The vendor shall document the logical security and side channel attack protections used by the Authenticator.	(SM-1, SM-20, SM-24, SM-26, SM-29)
	Calibration	
	No calibration required.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
5.2	N/A 5.2 was removed. VQ TP L1 L2 L2+ L3 L3+	
5.3	UAF + U2F + FIDO2; Consumer + Enterprise; L3 and higher	(SM-20, SM-24, SM-26)
	The Authenticator shall resist physical tampering that allows the attacker to violate FIDO Security Goals or FIDO Authenticator Security Requirements.	
	NOTE <i>The keys can be zeroed in response to an attack so the Authenticator is no longer usable. This is the way the relying party can be informed of the attack. If the Authenticator includes a biometric user verification feature, the calibration as defined below must address that feature to the same level of vulnerability assessment.</i>	
	NOTE Resistance to physical tampering obviates the need for physical tamper evidence.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3.1	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3.1	
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1	
	L3 - TEE PP (GlobalPlatform) COVERED by Calibration	
	Calibration	
	GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP] . The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]).	
	CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards] . The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see [CEMV3-1R5]). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards] . The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see [CEMV3-1R5]).	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence:	
	- Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:	
	Development Information (High Level Design)	

No.	- Mapping to Companion Program Requirements - Source Code Requirement	Security Measures
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1+ and higher Each secret or private key that is an Authenticator Security Parameter SHALL have a key use limit establishing the maximal number of times that particular key can be used within a particular Authenticator. NOTE Key refresh needs to be initiated by the <u>RP</u> for ideal user experience. In the current protocol, there is no provision for the Authenticator to initiate key refresh. This requirement interacts with requirements 2.1.3, 2.2.4, 5.5, 5.6. This is a requirement that provides flexibility in satisfying other requirements. The idea is that key use limit could be established such that the other requirements cited here are fulfilled (providing the vendor the ability to restrict the number of possible key uses rather than using longer nonces or better side-channel countermeasures), and additionally provides the option for the vendor to defend the Authenticator against attacks that are not yet known. Both cryptographic and side-channel attacks on the Authenticator can be enabled by having access to information associated with distinct cryptographic operations under the same key, so the vendor can elect to impose a conservative key use limit in order to defend against such attacks, especially for attacks that are not yet known and thus cannot easily be otherwise defended against. Any limit that allows the Authenticator to fulfill the other related requirements is sufficient for compliance to the requirement set. Some examples follow: If a vendor doesn't require any particular key use limit to satisfy additional requirements, and they are not concerned with the possibility of unknown cryptographic attack, then this limit can be simply the maximal possible uses of this key, given the hardware constraints of the Authenticator (i.e., the rate of key use that the hardware can support multiplied by the total expected lifetime of the Authenticator). In this instance, the Authenticator need not retain the number of uses of each key. For example, if a device can perform one key use per second and has an expected lifetime of 5 years, then a reported key use limit of roughly $(5 \times 365 + 1) \times 86400$ (less than 2^{28}) would be sufficient. If the vendor does wish to limit the number of possible key uses, but does not wish to store state associated with this data, then the vendor can limit the average key use rate such that the total number of uses of a given key throughout the expected lifetime of the Authenticator is sufficiently low. For an example, if an Authenticator vendor wishes to limit the total number of key uses of a user key to 10,000,000 (less than 2^{24}) and the Authenticator has a expected lifetime of 5 years, then the Authenticator MUST enforce a long term average key use rate of roughly 1 key use every 158 seconds. If a vendor does not wish to arbitrarily limit the rate at which keys can be used, but does wish to restrict the number of possible key uses, then they can store a count of the number of times a particular key has been used, and then disable use of the key at the limit. Some keys (e.g., the User Private Key, or the Attestation key) cannot be painlessly replaced within the FIDO protocol (this requires re-enrolling, or replacing the Authenticator, respectively), so a suitably large limit could be chosen to prevent usability problems. FIDO Authenticators typically require a user verification before using a private key. Such manual interaction requires a minimum amount of time. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	

No.	Calibration	Requirement	Security Measures
5.4		GlobalPlatform Calibration at L3 No calibration required	(SM-24, SM-26)
		CC Calibration at L3/L3+ No calibration required	
		L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, includingDevelopment Information (High level design).	
		L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references.	
		L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally)	
		L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
		L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code	
		L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.	
		L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
		L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results.	
		L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
		L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL execute a sample of tests from the tests documentation provided to verify the developer test results.	
		VQ TP L1 L2 L2+ L3 L3+	
UAF + U2F + FIDO2; Consumer + Enterprise; L3 and higher			
The Authenticator SHALL NOT leak Secret Authenticator Security Parameter data (e.g. due to power, near field, or radio leakage) at a rate that would allow an attacker to weaken the key below the claimed security strength of the key, even after an attacker has observed all allowed key uses.			
NOTE This interacts with requirement 5.4.			
Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3, ADV_ARC.1			
L3/L3+ - 3S in SoC PP (Common Criteria)			

No.	Requirement	Security Measures
5.5	Security Target with: FPT_PHP.3, FPT_ITT, ADV_ARC.1 L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) COVERED by Calibration Calibration GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5)). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5)). L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	(SM-20)
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L1+, L2+ and higher The variations in the amount of time required to perform a cryptographic algorithm SHALL NOT allow remote attackers to reduce the security of Authenticator Security Parameters which are secret or private keys below their claimed security strength. NOTE This requirement is mandatory for L1+, L2+-and-higher but it remains relevant for L2 as a developer guideline. It refers to all Secret Authenticator Security Parameters, and not just the authentication and attestation keys. This means it includes keys used to wrap these parameters, including keys that might be used to wrap biometric reference data.	

No.	The defense against remote timing attacks requires securing the cryptographic operation implementations and/or hardening the Allowed Restricted Operating Environment (AROE, see [FIDORestrictedOperatingEnv]) cache implementation:	Security Measures
5.6	Securing cryptographic operations: Concerning symmetric-key algorithms, It is recommended to use Hardware-based cryptographic algorithms replacing the software-based implementation and thus eliminating the side-channel information leaked from the execution of cryptographic operations. Otherwise, the software implementation will need to consider randomization of the control flow so that there is no fixed relation between the execution path and the cache set. Or, it will enable using the same amount of cache independently from the keys used. AROE cache enhanced implementations: It is recommended to secure the cache memory implementation in order to restrict the impact from the Rich OS on the AROE cache memory. This could be done by programming memory allocations so that the Rich OS memory will never be mapped to the AROE cache memory. The implementation can also consider flushing sensitive secure cache to memory to eliminate the information on the table access. For more details on how to implement adequate counter-measures please review the following research papers: - for ECC, remote timing attack (protocol timing) refer to https://eprint.iacr.org/2011/232 - for ECC, local cache timing attack (local cache timing) refer to http://eprint.iacr.org/2014/161 - for RSA cache timing refer to https://eprint.iacr.org/2015/898 - for AES cache timing refer to https://eprint.iacr.org/2014/435 NOTE This interacts with requirement 5.4.	
	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3, ADV_ARC.1 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3, ADV_ARC.1 L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) COVERED by Calibration	
	Calibration L1+: At L1+, the Authenticator Application SHALL implement adequate countermeasures to protect against timing attacks. This characteristic will be verified as specified in section Specific Calibration for Level 1+. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5).	(SM-20, SM-29)
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code	
	L3+ Vendor Questionnaire	

No.	Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: Requirement	Security Measures
	- Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L1+ Test Procedure (A2) The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
5.7	UAF + U2F + FIDO2; Consumer + Enterprise; L3 and higher The length of time required to perform a cryptographic algorithm using a Secret <u>Authenticator Security Parameter</u> SHALL NOT be dependent on the value of that secret or private key. NOTE No time variations are allowed in this requirement, in comparison to requirement 5.6, in which some time variations are allowed. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3, ADV_ARC.1 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3, ADV_ARC.1 L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) COVERED by Calibration Calibration GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ No calibration required L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	(SM-20, SM-29)

No.	Requirement	Security Measures
	- Development Information (High Level Design) - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Mapping to Companion Program Requirements - Source Code L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
5.8	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-2; L2 and higher All physical and logical debug interfaces to the Authenticator which enable violation of FIDO Authenticator Security Goals or FIDO Authenticator Security Requirements SHALL be disabled and unusable in fielded Authenticators. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: OSP, AGD_PRE L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: OSP, AGD_PRE, FMT_LIM L3/L3+ - Java Card PP (Common Criteria) Security Target with: OSP, AGD_OPE, AGD_PRE L3 - TEE PP (GlobalPlatform) COVERED if Debug Module is not used (TEE platform is closed). If Debug Module is used, COVERED by Security Target. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements	(SM-23, SM-26)

No.	• Source code (optionally) Requirement	Security Measures
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
5.8.1	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-2; L1+ The Authenticator should detect any debug activity and prevent from violation of FIDO Authenticator Security Goals or FIDO Authenticator Security Requirements. Calibration At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment and it SHALL implement anti-debugging techniques. This characteristic will be verified as specified in section Specific Calibration for Level 1+. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-23, SM-26)
	UAF + U2F + FIDO2; Consumer + Enterprise; L1+, L3 and higher The Authenticator SHALL be resistant to induced fault attacks. NOTE This requirement is mandatory for L1+, L3 and higher but it is still relevant for L2 and higher as a developer guideline. The developer will need to take into account SW-based fault induction side channel attack and implement relevant countermeasures such as enabling memory error detection. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: <u>FPT_PHP.3</u> L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: <u>FPT_PHP.3</u>	

No.	L3/L3+ - Java Card PP (Common Criteria) Requirement	Security Measures
5.9	Security Target with: FDP_SDI.2 FAU_ARP.1 L3 - TEE PP (GlobalPlatform) COVERED by Calibration Calibration GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5). L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Mapping to Companion Program Requirements • Source Code L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> the provided rationale and evidence meet the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	(SM-28, SM-21)
	UAF + U2F + FIDO2; Consumer + Enterprise; L1 and higher The Authenticator SHALL NOT implement any vendor specific features by embedding data or commands in MakeCredential Exclude lists, GetAssertion Allow Lists or any other field not intended for that purpose. Relation to Companion Program Security Target with: ADV_ARC (self-protection) ATE_IND and AVA (to test that fields cannot be misused) L3/L3+ - 3S in SoC PP (Common Criteria)	

No.	Requirement	Security Measures
5.10	Security Target with: ADV_ARC (self-protection) ATE_IND and AVA (to test that fields cannot be misused) L3/L3+ - Java Card PP (Common Criteria) Security Target with: ADV_ARC (self-protection) ATE_IND and AVA (to test that fields cannot be misused) L3 - TEE PP (GlobalPlatform) Security Target with: ADV_ARC (self-protection) ATE_IND and AVA (to test that fields cannot be misused)	(SM-28, SM-21)
	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> the provided rationale and evidence meet the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> vulnerability analysis and penetration testing to meet the calibration requirements.	
	VQ TP L1 L2 L2+ L3 L3+	

3.6 Attestation

For compliance with L1, Surrogate Basic Attestation [UAFProtocol] in the case of UAF / self-signed attestation certificates in the case of U2F is acceptable.

No.	Requirement	Security Measures
6.1	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1+ and higher The vendor SHALL use attestation certificates / ECDA Issuer public keys [FIDOEcdaaAlgorithm] dedicated to a single Authenticator model. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: Development Information (Architecture and Interfaces) Test Documentation Operational User Guidance and Preparative Procedures Guidance Mapping to Companion Program Requirements - Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: Development Information (High Level Design) Test Documentation Operational User Guidance and Preparative Procedures Guidance Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: Development Information (Low Level Design) Test Documentation Operational User Guidance and Preparative Procedures Guidance Mapping to Companion Program Requirements - Source Code L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL verify that the provided rationale and evidence meet the requirement. The tester SHALL execute independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.	(SM-3)

No.	The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. Requirement	Security Measures
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
6.2	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher Each Authenticator being declared as the same model (i.e. having the same AAID, AAGUID or having at least one common attestationCertificateKeyIdentifier in the MetadataStatement), SHALL fulfill at least the security properties stated for that Authenticator model. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirement MUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire <i>Describe</i> how this requirement can be verified through documentation review. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • <u>Operational User Guidance</u> and <u>Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Operational User Guidance</u> and <u>Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Operational User Guidance</u> and <u>Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	(SM-3)

No.	Requirement	Security Measures
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQTPL1L2L2+L3L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L1 and higher The Authenticator SHALL accurately describe itself in its provided metadata. The vendorSHALL provide all mandatory Metadata Statement fields see [FIDOMetadataRequirements]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met. At L1, in addition to the rationale provided by the vendor, this requirementMUST be demonstrated to the Test Proctor during Interoperability Testing. Documentation is not required. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: Development Information (Architecture and Interfaces) Operational User Guidance and <u>Preparative Procedures Guidance</u> Mapping to Companion Program Requirements Source code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: Development Information (High Level Design) Operational User Guidance and <u>Preparative Procedures Guidance</u> Mapping to Companion Program Requirements Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	(SM-3)

No.	Requirement	Security Measures
	- Development Information (Low Level Design) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L1 Test Procedure {A0} The Security Secretariat SHALL <u>verify</u> the requirement during Interoperability Testing. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; DaD; L1+ and higher	

No.	Requirement	Security Measures
6.4	The vendor SHALL document whether the attestation root certificate is shared across multiple Authenticator models. In such case, the attestation certificate MUST contain an extension indicating the Authenticator model (e.g. AAID or AAGUID). Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required L1+ Vendor Questionnaire <i>Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).</i> L2 Vendor Questionnaire <i>Describe how this requirement can be verified through documentation review. Please provide explicit design document references.</i> L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-3)

No.	Requirement	Security Measures
6.5	UAF + FIDO2; Consumer + Enterprise; DaD; L1+ and higher	
	The vendor SHALL document whether the attestation certificate includes the Authenticator model (e.g. AAID or AAGUID).	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria)	
	NOT COVERED	
	L3 - TEE PP (GlobalPlatform)	
	NOT COVERED	
	Calibration	
	GlobalPlatform Calibration at L3	
	No calibration required.	
	CC Calibration at L3/L3+	
	No calibration required	
L1+ Vendor Questionnaire		
Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).		
L2 Vendor Questionnaire		
Provide the tester with documentation that specifies how the requirement above is met.		
L3 GlobalPlatform Vendor Questionnaire		
Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence:		
- Development Information (Architecture and Interfaces) <u>Operational User Guidance and Preparative Procedures Guidance</u> - Mapping to Companion Program Requirements - Source code (optionally)		
L3 Vendor Questionnaire		
Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:		
<u>Development Information</u> (High Level Design) <u>Operational User Guidance and Preparative Procedures Guidance</u> - Mapping to Companion Program Requirements - Source Code		
L3+ Vendor Questionnaire		
Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents:		
<u>Development Information</u> (Low Level Design) <u>Operational User Guidance and Preparative Procedures Guidance</u> - Mapping to Companion Program Requirements - Source Code		
L1+ Test Procedure		
{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
L2 Test Procedure		
{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.		
L3 GlobalPlatform Test Procedure		
The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.		
L3 Test Procedure		
The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.		
L3+ Test Procedure		
The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.		
VQ TP L1 L2 L2+ L3 L3+		
FIDO2; Enterprise; GaVR-1; L1+ and higher		

No.	An Enterprise Attestation capable Authenticator that inserts a unique identifier in its Enterprise Attestation certificate SHALL use a unique private key per identifier. Requirement	Security Measures
6.6	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required. CC Calibration at L3/L3+ No calibration required L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The Tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure	(SM-23)

No.	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	Security Measures
	Requirement	
	The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
	VQ TP L1 L2 L2+ L3 L3+	

3.7 Operating Environment

NOTE

At L1 and L1+ we allow the Authenticator Application to run in any operating environment. At L1+ we expect the Authenticator Application to have substantial self-protection measures against hostile operating environments. For the levels L2 through L3+, the Authenticator Application needs to run in an [Allowed Restricted Operating Environment \(FIDO Restricted Operating Env\)](#). Consequently the requirements in this section only apply to L2 and higher, except requirement 7.7. That means that Operating Environment can be read as Restricted Operating Environment (ROE), and even more as Allowed Restricted Operating Environment (AROE), in all requirements of this section, except for requirement 7.7.

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L2 and higher	

No.	Requirement	Security Measures
7.1	The Authenticator Application SHALL run in an Allowed Restricted Operating Environment (AROE)[FIDORestrictedOperatingEnv]. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-1)
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L2 and higher The operating environment SHALL be configured so that all operating environment security functions used by the Authenticator are active and available for use to support the FIDO Authenticator Security Goals or FIDO Authenticator Security Requirements.	

No.	Relation to Companion Program	Requirement	Security Measures
7.2		L3/L3+ - IC PP (Common Criteria) NOT COVERED	(SM-1)
		L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
		L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
		L3 - TEE PP (GlobalPlatform) NOT COVERED	
		Calibration GlobalPlatform Calibration at L3 No calibration required	
		CC Calibration at L3/L3+ No calibration required	
		L2 Vendor Questionnaire <i>Provide a rationale for how the requirement above is met.</i> <i>Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.</i>	
		L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Test Documentation • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source code (optionally)	
		L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Operational User Guidance and Preparative Procedures Guidance • Test Documentation • Mapping to Companion Program Requirements • Source Code	
		L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Operational User Guidance and Preparative Procedures Guidance • Test Documentation • Mapping to Companion Program Requirements • Source Code	
		L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale.	
		L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results.	
		L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	
		L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.	

No.	VQ	TP	L1	L2	L2+	L3	L3+	Requirement	Security Measures
	UAF	U2F	FIDO2	Consumer	Enterprise	GaVR-3	L2 and higher		
7.3								The operating environment SHALL prevent non-Authenticator processes from reading, writing and modifying running or stored <u>Authenticator Application</u> and its associated memory.	(SM-1)
								Relation to Companion Program	
								L3/L3+ - IC PP (Common Criteria)	
								Security Target with: ADV_ARC.1 with MMU Feature	
								L3/L3+ - 3S in SoC PP (Common Criteria)	
								Security Target with: ADV_ARC.1 with MMU Feature	
								OR	
								Security Target with optional Composite Software Isolation Package	
								L3/L3+ - Java Card PP (Common Criteria)	
								Security Target with: ADV_ARC.1 with Firewall Feature	
							L3 - TEE PP (GlobalPlatform)		
							Security Target with: FCS_COP.1, FDP_ACC.1 , FDP_ACF.1 , FDP_IFC.2 , FDP_IFF.1 , FDP_ITT.1 , FDP_RIP.1, FDP_ROL.1, FIA_ATD.1, FIA_UID.2, FIA_USB.1, FMT_MSA.1, FMT_MSA.3, FMT_SMF.1, FMT_SMR.1, FPT_FLS.1, FPT_INI.1, and FPT_ITT.1		
							Calibration		
							L2: At L2, the requirement SHALL be fulfilled by mechanisms functioning entirely inside the <u>AROE</u> .		
							GlobalPlatform Calibration at L3		
							At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in <u>[TEE-PP]</u> . The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see <u>[TEE-PP]</u> and <u>[TEE-EM]</u>).		
							CC Calibration at L3/L3+		
							L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks <u>[AttackPotentialSmartcards]</u> . The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see <u>CEMV3-1R5</u>).		
							L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks <u>[AttackPotentialSmartcards]</u> . The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see <u>CEMV3-1R5</u>).		
							L2 Vendor Questionnaire		
							Provide a rationale for how the requirement above is met.		
							Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.		
							L3 GlobalPlatform Vendor Questionnaire		
							Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence:		
							- Development Information (Architecture and Interfaces) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source code (optionally)		
							L3 Vendor Questionnaire		
							Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:		
							- Development Information (High Level Design) - Operational User Guidance and Preparative Procedures Guidance		

No.	- Mapping to Companion Program Requirements - Source Code Requirement	Security Measures
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Operational User Guidance and Preparative Procedures Guidance - Mapping to Companion Program Requirements - Source Code L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-3; L2 and higher The operating environment SHALL NOT be able to be modified in a way that undermines the security of the Authenticator. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Operating Environment fully protected in integrity (boot time configuration + integrity checking) L3/L3+ - 3S in SoC PP (Common Criteria) Operating Environment fully protected in integrity (boot time configuration + integrity checking) L3/L3+ - Java Card PP (Common Criteria) Operating Environment fully controlled in integrity boot time configuration + integrity checking) L3 - TEE PP (GlobalPlatform) Security Target with: FAU_ARP.1, FPT_FLS.1, FPT_INI.1, and FPT_TEE.1 Calibration L2: At L2, the requirementSHALL be fulfilled by mechanisms functioning entirely inside theAROE. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirementSHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protectionSHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5). L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit	

No.	Requirement	Security Measures
	design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and evidence meet the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L2 and higher The security configuration of the operating environment SHALL be fully under control of the Authenticator vendor or its delegates such that the security configuration present at commercial shipment cannot be changed except for in-the-field updates that are also fully under control of the Authenticator device vendor or its delegates. NOTE In some environments (e.g. PC), the user (i.e. anyone other than the Authenticator vendor or its delegates) might change the security configuration of the Authenticator. However, it is the responsibility of the Authenticator to detect potential changes in the Authenticator security configuration and provide the appropriate RP response through a FIDO assertion if the changed configuration still meets the expected security properties according to the Metadata Statement (or stop working and either protect the security parameters at the prior level or securely destroy them if it doesn't). The Authenticator certification will include all security configuration items available to the user. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: AGD_PRE AGD_OPE ADV_ARC ALC_LCD L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: AGD_PRE, AGD_OPE, ADV_ARC, ALC_LCD L3/L3+ - Java Card PP (Common Criteria) Security Target with:	

No.	Requirement	Security Measures
7.5	AGD_PRE AGD_OPE GP management L3 - TEE PP (GlobalPlatform) PARTIALLY COVERED Security Target with: FPT_INI.1, FPT_FLS.1, and FPT_TEE.1. This requirement needs to be expressed in the <u>Security Target</u> and verified as part of the FIDO evaluation by the Lab. Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-28)
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-1; L2 and higher The security properties of the Authenticator SHALL NOT be modifiable by anyone other than the Authenticator device vendor or its delegates. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: AGD_PRE AGD_OPE ADV_ARC ALC_LCD L3/L3+ - 3S in SoC PP (Common Criteria)	

No.	Requirement	Security Measures
7.6	Security Target with: AGD_PRE, AGD_OPE, ADV_ARC, ALC_LCD L3/L3+ - Java Card PP (Common Criteria) Security Target with: AGD_PRE and AGD_OPE L3 - TEE PP (GlobalPlatform) Security Target with: FCS_COP.1, FPT_INI.1, FPT_FLS.1, and FPT_TEE.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • Development Information (Architecture and Interfaces) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (High Level Design) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Information (Low Level Design) • Operational User Guidance and Preparative Procedures Guidance • Mapping to Companion Program Requirements • Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-1, SM-28)
	FIDO2; Enterprise; GaVR-1; L1 and higher The Vendor MUST verify that the RP ID list provided by the Customer and configured into the device only contains RP IDs owned by the Customer or the Customer's Data Processors (as defined by the GDPR). If the device supports EA mode 2, the Vendor SHALL inform the Customer that the RP IDs configured in the browsers can only be RP IDs owned by the	

No.	Customer or the Customer's Data Processors (as defined by the GDPR): Requirement	Security Measures
7.7	Relation to Companion Program L3/L3+ - IC PP (Common Criteria) NOT COVERED L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED L3/L3+ - Java Card PP (Common Criteria) NOT COVERED L3 - TEE PP (GlobalPlatform) NOT COVERED	(SM-1, SM-28)
	Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Operational User Guidance and Preparative Procedures Guidance</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A2} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale.	
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	

No.	Requirement	Security Measures
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	

3.8 Self-Tests and Firmware Updates

No.	Requirement	Security Measures
	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-2; L2 and higher An Authenticator SHALL either (a) be resistant to induced fault analysis (requirement 5.9) or (b) after powering up, an Authenticator SHALL run a known answer self-test for any deterministic cryptographic function prior to using that function, or (c) the Authenticator SHALL verify the validity of its software and Firmware using an Allowed Signature Algorithm. If the most recent known answer self-test did not pass, the corresponding cryptographic function SHALL NOT be used. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3, FPT_INI L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) Security Target with: FAU_ARP.1, FPT_TEE.1, FPT_INI.1, FCS_COP.1, and FPT_FLS.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. <i>Provide</i> a rationale for how the requirement above is met. <i>Provide</i> a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. 8.1 L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	(SM-21, SM-24)

No.	Requirement	Security Measures
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this are consistent with the vendor's provided rationale. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	
8.1.1	UAF + U2F + FIDO2; Consumer + Enterprise; GaVR-2; L1+ An Authenticator shall either (a) be resistant to induced fault analysis (requirement 5.9) or (b) during runtime an Authenticator shall run known answer self-tests for any deterministic cryptographic function prior to using that function, or (c) the Authenticator shall verify the validity of its software and Firmware using an Allowed Signature Algorithm. If the most recent known answer self-test did not pass, the corresponding cryptographic function shall not be used. Calibration No calibration required. L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. <i>Provide</i> the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. VQ TP L1 L2 L2+ L3 L3+	(SM-21, SM-24)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher If the Authenticator mediates the update of its software, then the Authenticator SHALL use an Allowed Data Authentication or Signature Cryptographic Function, as required by the standard referenced in the "Allowed Cryptography List" [FIDOAllowedCrypto], to verify that the software being loaded has not been tampered with. If the loaded software does not pass, then the Authenticator SHALL NOT update the software. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FCS_COP.1 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FCS_COP.1 Note: PP0117 release 2 will cover firmware and software updates with an additional functional package L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) Security Target with: FAU_ARP.1, FPT_TEE.1, FPT_INI.1, FCS_COP.1, and FPT_FLS.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L1 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	

No.	Requirement	Security Measures
8.2	L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> a rationale for how the requirement above is met. <i>Provide</i> a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met. L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. VQ TP L1 L2 L2+ L3 L3+	(SM-16, SM-26, SM-24)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L2 and higher An Authenticator SHALL either (a) be resistant to induced fault analysis (requirement 5.9) or (b) the Authenticator SHALL verify that any generated Authenticator Security Parameters which are public / private keys have the correct mathematical relationships prior to outputting the public key or using the private key for signature generation, or (c) the Authenticator SHALL verify the validity of its software and Firmware using an Allowed Signature Algorithm. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3, FPT_INI	

No.	L3/L3+ - Java Card PP (Common Criteria)	Requirement	Security Measures
8.3	Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) Security Target with: FAU_ARP.1, FPT_TEE.1, FPT_INI.1, FCS_COP.1, and FPT_FLS.1 Calibration GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. Provide a rationale for how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: - Development Information (Architecture and Interfaces) - Test Documentation - Mapping to Companion Program Requirements - Source Code (optionally) L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (High Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Information (Low Level Design) - Test Documentation - Mapping to Companion Program Requirements - Source Code L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. The tester SHALL <u>execute</u> independent tests and/or a sample of vendor tests to verify the test results. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results.		(SM-21)
	VQ TP L1 L2 L2+ L3 L3+ UAF + U2F + FIDO2; Consumer + Enterprise; L1+, L2+ and higher		

No.	Requirement	Security Measures
8.4	If the Authenticator is not resistant to induced fault analysis as defined in requirement 5.9, the Authenticator SHALL verify that any produced signature is valid prior to outputting the signature. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: FPT_PHP.3 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: FPT_PHP.3 L3/L3+ - Java Card PP (Common Criteria) Security Target with: FAU_ARP.1 L3 - TEE PP (GlobalPlatform) COVERED by Calibration Calibration L1+: At L1+, the Authenticator Application SHOULD minimize its dependency to the underlying operating environment and it SHALL implement software protection techniques to protect against induced fault attacks (e.g.whitebox crypto for crypto operations, and anti-tampering to protect the signature verification). This characteristic will be verified as specified in section Specific Calibration for Level 1+. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, the protection SHALL be strong enough to be protected against enhanced-basic effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.3 or higher vulnerability analysis (see CEMV3-1R5). L3+: At L3+, the protection SHALL be strong enough to be protected against moderate or high effort software and hardware attacks [AttackPotentialSmartcards]. The vulnerability assessment methodology is defined by AVA_VAN.4 or higher vulnerability analysis (see CEMV3-1R5). L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L1+ Test Procedure (A2) The tester SHALL <i>verify</i> that the documentation meets the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <i>verify</i> that the provided rationale and evidence meet the requirement. The Tester SHALL <i>execute</i> independent tests and/or a sample of vendor tests to verify the test results. The Tester SHALL <i>conduct</i> vulnerability analysis and penetration testing to meet the calibration requirements. L3 Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <i>conduct</i> vulnerability analysis and penetration testing to meet the calibration requirements. L3+ Test Procedure The Tester SHALL <i>verify</i> the provided rationale and documentation meets the requirement. The Tester SHALL <i>execute</i> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <i>conduct</i> vulnerability analysis and penetration testing to meet the calibration requirements. VQ TP L1 L2 L2+ L3 L3+	(SM-21)
	UAF + U2F + FIDO2; Consumer + Enterprise; L1 and higher If any firmware binary in the authenticator changes, the vendor MUST update the firmware version. For FIDO2, this includes the firmware version in GetINFO, the HID INIT command and other reported firmware versions. For U2F, this includes the firmware version in the HID INIT command and other reported firmware versions. For UAF, it includes the "AuthenticatorVersion" as returned in the Reg assertion. Relation to Companion Program	

No.	Requirement	Security Measures
8.5	L3/L3+ - IC PP (Common Criteria) NOT COVERED	(SM-21)
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) >NOT COVERED	
	L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met.	
	L2 Vendor Questionnaire Provide the Security Secretariat with <u>arationale</u> of how the requirement above is met. Provide a documentation review procedure to confirm that the Authenticator's design is consistent with the provided rationale. Please provide explicit design document references.	
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting evidence: • <u>Development Information</u> (Architecture and Interfaces) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code (optionally)	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (High Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents: • <u>Development Information</u> (Low Level Design) • <u>Test Documentation</u> • Mapping to Companion Program Requirements • Source Code	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure The tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	

No.	VQ	TP	L1	L2	L2+	L3	L3+	Requirement	Security Measures
-----	----	----	----	----	-----	----	-----	-------------	-------------------

3.9 Manufacturing and Development

NOTE

At L1 and L1+, the creation of the final Authenticator Application is considered the Authenticator manufacturing.

No.	Requirement	Security Measures
9.1	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher	(SM-28)
	If Authenticator Security Parameters which are cryptographic keys are generated during manufacturing, then these keys SHALL be generated as required by the standard referenced in the "Allowed Cryptography List" [<u>FIDOAllowedCrypto</u>] for that algorithm using an Allowed Random Number Generator.	
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria)	
	NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria)	
	NOT COVERED	
	L3 - TEE PP (GlobalPlatform)	
	NOT COVERED	
	Calibration	
	L1: At L1, the creation of the final <u>Authenticator Application</u> is considered the Authenticator manufacturing.	
	L1+: At L1+, the creation of the final <u>Authenticator Application</u> (either final compilation or individualization of the compiled code) is considered the Authenticator manufacturing.	
	L2: No calibration required.	
	GlobalPlatform Calibration at L3	
	No calibration required	
	CC Calibration at L3/L3+	
	No calibration required	
	L1 Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>provide</i> the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>provide</i> the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design).	
	L2 Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>describe</i> how this requirement can be verified through documentation review. Please provide explicit design documentation references.	
	L3 GlobalPlatform Vendor Questionnaire	
	Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references.	
	L3 Vendor Questionnaire	
	Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	
	• <u>Operational User Guidance and Preparative Procedures Guidance</u> • <u>Development Security Life-Cycle Support</u> • Mapping to Companion Program Requirements	
	L3+ Vendor Questionnaire	
	Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	
	• <u>Operational User Guidance and Preparative Procedures Guidance</u> • <u>Development Security Life-Cycle Support</u> • Mapping to Companion Program Requirements	
	L1 Test Procedure	

No.	Requirement	Security Measures
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> a development site audit to validate the security measures defined in the life-cycle support documents VQ TP L1 L2 L2+ L3 L3+	
9.2	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L2 and higher Access to the private component of any Authenticator's attestation key SHALL be restricted to security-qualified authorized factory personnel. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - Java Card PP (Common Criteria) Security Target with: ALC_DVS.2 L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration L1+: At L1+, this characteristic will be verified as specified in section Specific Calibration for Level 1+. The security protection controls (physical, procedural, personnel, and other security measures) on the production environment MUST be adequate to provide the confidentiality and integrity of the design and implementation of the Authenticator that is necessary to ensure that secure operation of the Authenticator is not compromised. L2: At L2, security protection controls (physical, procedural, personnel, and other security measures) on the production environment MUST be adequate to provide the confidentiality and integrity of the design and implementation of the Authenticator that is necessary to ensure that secure operation of the Authenticator is not compromised. NOTE For example, production machines will not be directly connected to unprotected networks (e.g. the Internet). Only security-qualified authorized factory personnel SHALL have access to all means of processing the handling of attestation key life cycle (generation, provisioning, and verification). Security measures for protecting the life cycle management of the key generation and key provisioning SHALL be provided in the Vendor Questionnaire. NOTE Security-qualified authorized factory personnel should be limited to a small number of people. It should not be every worker in the factory and it should not be all the development engineers. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]).	(SM-28)

No.	CC Calibration at L3/L3+ Requirement	Security Measures
	L3: At L3, ALC_DVS.1 MUST be applied. L3+: At L3+, ALC_DVS.2 MUST be applied. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements. Please provide explicit documentation references. L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Security Life-Cycle Support • Mapping to Companion Program Requirements L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: • Development Security Life-Cycle Support • Mapping to Companion Program Requirements L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and documentation meet the requirement. L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct a development site audit to validate the security measures defined in the life-cycle support documents VQ TP L1 L2 L2+ L3 L3+	
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1+ and higher The equipment used to generate, store and provision Authenticator Security Parameters SHALL be secured to prevent modification of all provisioned Authenticator Security Parameters and secured to prevent capture of provisioned Secret Authenticator Security Parameters. The equipment used by the authenticator vendor to generate, store and provision other keys whose compromise would affect the security of the Authenticator and the ability to identify it based on certificates in the FIDO Metadata Service [FIDOMetadataService] SHALL also be secured. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - Java Card PP (Common Criteria) Security Target with: ALC_DVS.2 L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration L1+: At L1+, this characteristic will be verified as specified in section Specific Calibration for Level 1+.	

No.	Requirement	Security Measures
9.3	All Authenticator Security Parameters must be protected by some form of integrity protection and all Secret Authenticator Security Parameters must never be exposed in the clear. Use of Allowed Cryptographic Algorithms [FIDOAllowedCrypto1-2] is preferred, but not required for these protections (if the lack of security is compensated by physical controls). L2: At L2, all Authenticator Security Parameters must be protected by some form of integrity protection and all Secret Authenticate Security Parameters must never be exposed in the clear. Use of Allowed Cryptographic Algorithms [FIDOAllowedCrypto] is preferred, but not required for these protections (if the lack of security is compensated by physical controls). NOTE For example, attestation secret keys provisioned over a serial cable between the Authenticator device and the equipment used to store and inject keys should be encrypted and integrity protected to prevent factory personnel from snooping the cable or carrying out a man-in-the-middle attack on the cable. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, ALC_DVS.1 (see [CC3V3-1R5]) MUST be applied. L3+: At L3+, ALC_DVS.2 (see [CC3V3-1R5]) MUST be applied. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements. Please provide explicit documentation references. L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Security Life-Cycle Support - Mapping to Companion Program Requirements L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Security Life-Cycle Support - Mapping to Companion Program Requirements L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement. L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement. L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and documentation meet the requirement. L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>execute</u> a sample of tests from the tests documentation provided to verify the developer test results. The Tester SHALL <u>conduct</u> a development site audit to validate the security measures defined in the life-cycle support documents VQ TP L1 L2 L2+ L3 L3+	(SM-28)
	UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1 and higher A revision control system SHALL be implemented for the Authenticator and all of its components, and for all associated Authenticator documentation. This revision control system SHALL, at minimum, track changes to all software or hardware specifications, implementation files, and all tool chains used in the production of the final Authenticator. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ALC_CMC.4	

No.	ALC_CMS.4	Requirement	Security Measures
9.4	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ALC_CMC.4 ALC_CMS.4		(SM-28)
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: ALC_CMC.4 ALC_CMS.4		
	L3 - TEE PP (GlobalPlatform) NOT COVERED		
	Calibration L1: At L1, the use of a revision control system SHALL only be proven for the Authenticator Application. L1: At L1+, the use of a revision control system SHALL only be proven for the Authenticator Application. L2: No calibration required. GlobalPlatform Calibration at L3 No calibration required CC Calibration at L3/L3+ No calibration required		
	L1 Vendor Questionnaire Provide the Security Secretariat with a rationale of how the requirement above is met.		
	L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including Development Information (High level design).		
	L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references.		
	L3 GlobalPlatform Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements. Please provide explicit documentation references.		
	L3 Vendor Questionnaire TProvide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Security Life-Cycle Support - Mapping to Companion Program Requirements		
	L3+ Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Security Life-Cycle Support - Mapping to Companion Program Requirements		
	L1 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.		
	L1+ Test Procedure {A2} The tester SHALL verify that the documentation meets the requirement.		
	L2 Test Procedure {A2} The tester SHALL conduct the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.		
	L3 GlobalPlatform Test Procedure The Tester SHALL verify that the provided rationale and documentation meet the requirement.		
	L3 Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement.		
	L3+ Test Procedure The Tester SHALL verify the provided rationale and documentation meets the requirement. The Tester SHALL conduct a development site audit to validate the security measures defined in the life-cycle support documents		

No.	VQ	TP	L1	L2	L2+	L3	L3+	Requirement	Security Measures
9.5	UAF, L2F, FIDO2, Consumer, Enterprise, TVFP, L1 and higher							Each version of each configuration item that comprises the Authenticator and associated documentation SHALL be assigned a unique identification.	(SM-28)
	Relation to Companion Program							L3/L3+ - IC PP (Common Criteria) Security Target with: ALC_CMC.4 ALC_CMS.4	
	L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ALC_CMC.4 ALC_CMS.4								
	L3/L3+ - Java Card PP (Common Criteria) Security Target with: ALC_CMC.4 ALC_CMS.4								
	L3 - TEE PP (GlobalPlatform) NOT COVERED								
	Calibration							L1: At L1, the configuration items comprising the <u>Authenticator Application</u> are relevant.	
	L1+: At L1+, the configuration items comprising the <u>Authenticator Application</u> are relevant.								
	L2: No calibration required.								
	GlobalPlatform Calibration at L3 No calibration required								
	CC Calibration at L3/L3+ No calibration required								
	L1 Vendor Questionnaire <i>Provide the Security Secretariat with a <u>rationale</u> of how the requirement above is met.</i>								
	L1+ Vendor Questionnaire <i>Provide the tester with a <u>rationale</u> of how the implementation meets the requirements, including <u>Development Information</u> (High level design).</i>								
	L2 Vendor Questionnaire <i>Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references.</i>								
	L3 GlobalPlatform Vendor Questionnaire <i>Provide the tester with a <u>rationale</u> for how the implementation meets the requirements. Please provide explicit documentation references.</i>								
	L3 Vendor Questionnaire <i>Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:</i> • <u>Development Security Life-Cycle Support</u> • Mapping to Companion Program Requirements								
	L3+ Vendor Questionnaire <i>Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:</i> • <u>Development Security Life-Cycle Support</u> • Mapping to Companion Program Requirements								
	L1 Test Procedure <i>{A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.</i>								
	L1+ Test Procedure <i>{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.</i>								
	L2 Test Procedure <i>{A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.</i>								
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and documentation meet the requirement.								

No.	Requirement	Security Measures
9.6	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> a development site audit to validate the security measures defined in the life-cycle support documents VQ TP L1 L2 L2+ L3 L3+ UAF + U2F + FIDO2; Consumer + Enterprise; TVFR; L1+ and higher	(SM-28)
	There SHALL be management and control over all personnel that can enter the physical part of the factory where attestation key material is configured into the authenticators. NOTE This refers to all factory workers possibly including those that have little or nothing to do with the manufacturing line itself, such as cleaning and repair staff. The point of this requirement is to defend against counterfeit devices being run through the manufacturing line to receive real attestation keys. For example, loading dock staff working at 2 AM might conspire to manufacture counterfeit devices. Relation to Companion Program L3/L3+ - IC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - 3S in SoC PP (Common Criteria) Security Target with: ALC_DVS.2 L3/L3+ - Java Card PP (Common Criteria) Security Target with: ALC_DVS.2 L3 - TEE PP (GlobalPlatform) NOT COVERED Calibration L1+: At L1+, standard per-person badge access systems or standard brass keys and door locks are acceptable. Any personnel without a key or badge MUST be escorted by one with a key or badge. L2: At L2, standard per-person badge access systems or standard brass keys and door locks are acceptable. Any personnel without a key or badge MUST be escorted by one with a key or badge. GlobalPlatform Calibration at L3 At L3 GlobalPlatform, this requirement SHALL be met for all inputs to the Authenticator. At L3 GlobalPlatform, the protection mechanisms SHALL resist attackers with Enhanced-basic attack potential as defined in [TEE-PP]. The vulnerability assessment methodology is defined by AVA_VAN_AP.3 (see [TEE-PP] and [TEE-EM]). CC Calibration at L3/L3+ L3: At L3, ALC_DVS.1 (see [CC3V3-1R5]) must be applied. L3+: At L3+, ALC_DVS.2 (see [CC3V3-1R5]) must be applied. L1+ Vendor Questionnaire Provide the tester with a rationale of how the implementation meets the requirements, including <u>Development Information</u> (High level design). L2 Vendor Questionnaire Describe how this requirement can be verified through documentation review. Please provide explicit design documentation references. L3 GlobalPlatform Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements. Please provide explicit documentation references. L3 Vendor Questionnaire Provide the tester with a rationale for how the implementation meets the requirements, including the following supporting documents: - Development Security Life-Cycle Support - Mapping to Companion Program Requirements L3+ Vendor Questionnaire TP Provide the tester with a <u>rationale</u> for how the implementation meets the requirements, including the following supporting documents:	

No.	Requirement	Security Measures
10.1	If the Authenticator supports Enterprise Attestation, it MUST be sold to an Enterprise for use with its employees, contractors or defined members. It MUST NOT be used with the customers of the Enterprise. It MUST NOT be sold to end-users on the open market.	(SM-28)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
	L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>provide</i> the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>provide</i> the tester with a rationale of how the implementation meets the requirements.	
	L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why. If Yes, <i>describe</i> how this requirement can be verified through documentation review.	
	L3 GlobalPlatform Vendor Questionnaire Describe how this requirement can be verified through documentation review.	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> a development site audit to validate the security measures defined in the life-cycle support documents	
	VQ TP L1 L2 L2+ L3 L3+	
	FIDO2; Consumer+Enterprise; TVFR; L1 and higher	

No.	Requirement	Security Measures
10.3	An Authenticator MUST NOT support features that use protocol features for other purposes than the intended purpose. This includes, but is not limited to: - Tunneling information through the allow list. (For example, firmware updates.) - Adding additional information in the Credential ID. (For example, adding transaction data.)	(SM-28)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
	L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>provide</i> the tester with a rationale of how the implementation meets the requirements.	
	L2 Vendor Questionnaire Is this requirement applicable to the Authenticator? If No, then <i>describe</i> why. If Yes, <i>describe</i> how this requirement can be verified through documentation review.	
	L3 GlobalPlatform Vendor Questionnaire Describe how this requirement can be verified through documentation review.	
	L3 Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L3+ Vendor Questionnaire Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L1 Test Procedure {A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure {A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure {A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement. The Tester SHALL <u>conduct</u> a development site audit to validate the security measures defined in the life-cycle support documents	
	VQ TP L1 L2 L2+ L3 L3+	
	FIDO2: Consumer+Enterprise; TVFR; L1 and higher	
	During a FIDO Reset, the device perform the following actions:	

No.	Requirement	Security Measures
10.4	- the PIN MUST be removed - Any Biometric information MUST be removed - ALL Credentials and related information MUST be removed - LargeBlob storage MUST be cleared - BLE pairing MUST be removed - Regenerate the Device ID - Generate a new value for the Credential Store State - Disable Enterprise Attestation - Invalidate all PUATs (including Persistent PUAT) - Reset to default the following features - Always require user verification - Minimum PIN Length - Long Touch for Reset	(SM-28)
	Relation to Companion Program	
	L3/L3+ - IC PP (Common Criteria) NOT COVERED	
	L3/L3+ - 3S in SoC PP (Common Criteria) NOT COVERED	
	L3/L3+ - Java Card PP (Common Criteria) NOT COVERED	
	L3 - TEE PP (GlobalPlatform) NOT COVERED	
	Calibration	
	GlobalPlatform Calibration at L3 No calibration required	
	CC Calibration at L3/L3+ No calibration required	
	L1 Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>provide</i> the Security Secretariat with a <u>rationale</u> of how the requirement above is met.	
	L1+ Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>provide</i> the tester with a rationale of how the implementation meets the requirements.	
	L2 Vendor Questionnaire	
	Is this requirement applicable to the Authenticator? If No , then <i>describe</i> why.	
	If Yes, <i>describe</i> how this requirement can be verified through documentation review.	
	L3 GlobalPlatform Vendor Questionnaire	
	Describe how this requirement can be verified through documentation review.	
	L3 Vendor Questionnaire	
	Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L3+ Vendor Questionnaire	
	Provide the tester with a <u>rationale</u> for how the implementation meets the requirements.	
	L1 Test Procedure	
	{A1} The Security Secretariat SHALL <u>review</u> the provided rationale to verify the requirement is met.	
	L1+ Test Procedure	
	{A2} The tester SHALL <u>verify</u> that the documentation meets the requirement.	
	L2 Test Procedure	
	{A2} The tester SHALL <u>conduct</u> the documentation review described by the vendor, and confirm that all the results of this review meet the requirement.	
	L3 GlobalPlatform Test Procedure	
	The Tester SHALL <u>verify</u> that the provided rationale and evidence meet the requirement.	
	L3 Test Procedure	
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	
	L3+ Test Procedure	
	The Tester SHALL <u>verify</u> the provided rationale and documentation meets the requirement.	

No.	The Tester SHALL conduct a development site audit to validate the security measures defined in the life-cycle support documents Requirement							Security Measures
	VQ	TP	L1	L2	L2+	L3	L3+	

A. Differences between versions

Differences between FIDO 1.6 and 1.7 security and privacy requirements

Clarify that UVM extension is optional

List up things to delete during Reset

Prevent misuse of protocol features

Update of Vendor Questionnaire boxes for requirements 1.11, 1.12, 3.7 and 5.6

Differences between FIDO 1.5 and 1.6 security and privacy requirements

The companion program and calibration boxes are revamped for a better understanding

A new companion program is available for L3/L3+, the PP 0117 (3S in SoC).

New security requirements are added to deal with Passkeys

Requirement 1.12 about Multi-Device Credentials

Requirement 2.1.21 about Multi-Device Credentials

Requirement 2.4.1 about Backup Eligible Authenticator Security Parameters (BEASP)

Requirement 2.4.2 about BEASP

Requirement 5.10

Requirement 3.4 clarify that using the cached user presence ends the cached period.

Differences between FIDO 1.4 and 1.5 security and privacy requirements

The L1+ security level is added

This allows software-protected authenticators using security mechanisms described in ETSI TR 103 642 to get certified.

Differences between FIDO 1.3 and 1.4 security certification requirements

The GlobalPlatform Companion Program is added

This allows authenticators using GP-certified TEE's to get speedier certification.

This is slotted in at L3, so there are now two paths to get L3 certification. A vendor must pick one and stick to it.

The HW Examples Table is Updated

This table now gives very specific examples rather than describing classes or groups of hardware. These are only examples. Vendor's HW is likely to be different and must be specifically evaluated. The examples table is not a short cut or used in certification.

Major Clarification for User Verification

Requirements 3.1, 3.2, 3.4 and 3.7 are updated and 3.11 is added.

How an authenticator indicates it supports user presence and user verification is better specified and described. This is for indication in the metadata, in the response to the server and in the user verification method extension.

Timeouts when changing the PIN, enrolling more fingerprints and such are more clearly specified.

L2 Calibration was added for requirement 3.7 to day that trusted path must be implemented inside the AROE.

Some of the user verification requirements are now completely verified at interop test. Documentation is not required.

Allow clientPIN and smartphone lock screen PIN at L2

Requirements 3.2, 3.7 and 3.8 are updated and 3.11 is added.

At L2 and higher authenticators that implement multiple user verification methods must support the user verification method extension.

External PIN, password and pattern authenticators are allowed for L2 and above certification. Authenticators that do this must explicitly indicate this in metadata and the user verification method extension. New authentication "_EXTERNAL" methods are defined in the FIDO registry for this. This allows L2 certification of FIDO2 clientPIN and authenticators making use of smart phone lock screen PINs.

There is a clear requirement that no new user verification methods or templates are added for an authenticator without a user verification from existing templates or methods. For example, the user must successfully enter a PIN or pass fingerprint verification to add a new finger for an authenticator that support PIN and fingerprint.

Privacy Requirements Partially Restored

Requirements 3.5 and 3.6, which are UAF-only, are restored and give strong privacy.

Requirement 4.6 was added. It is FIDO2 only. It gives the calibrated per security level requirements for implementation of the FIDO 2 privacy extension.

Clarification on sharing identical attestation key in 100,000 devices...

No change in concept. Just clarification on how attestation keys should be shared with 100,000 devices.

Induced Fault Clarification

L3 and L3+ calibration was removed for requirement 8.4 as it was unnecessary

Minor Level Naming Fix

Some leftover references to L4 and L5 were corrected.

Minor Correlation Handle Definition Fix

Correlation Handle was defined twice.

Version Number Corrections

Some of the version older numbers in cross references in the document set were wrong.

Partner Program Renamed

"Partner Program" is renamed to "Companion Program".

External References Corrections

Many of the external references had broken links and other issues. They have been corrected.

Enterprise Attestation

The Enterprise and Consumer profiles were added and defined.

The Enterprise Attestation feature was restricted to the Enterprise profile

The Enterprise profile requirements were adjusted for Enterprise Attestation

Differences between FIDO 1.4 and 1.5 security certification requirements

B. Old version of Table 2.2

This section is non-normative.

The objective of this table, "Examples of underlying platforms and physical attacks", was to describe various implementations of an Authenticator, and the potential certification level they can target, to help the reader decide which security level certification he could apply for the Authenticator. To this effect, there were two columns describing examples and corresponding certification level. However, the table was also describing ratings for the different implementations, based on JIL Rating (smart card type evaluation) or TEE rating (TEE type evaluation). These ratings apply to different evaluation schemes and cannot be compared.

CC rating and evaluation methodology (CEM, [CEMV3-1R5]) is generic and thus adapted to all types of products. This was the basis of the other evaluation methodologies below, but there are significant differences in the approaches leading to not comparable rating scores (split of identification and exploitation, different criteria, different weights for criteria, etc.):

- JIL rating and evaluation methodology are adapted to smart cards [AttackPotentialSmartcards].
- TEE rating and evaluation methodology are adapted to TEE [TEE-EM].
- FIDO L1+ rating and evaluation methodology are adapted to SW-only products [L1plus-Eval].

Comparatively, the evaluations against CC Protection Profiles done by Microsoft (for laptops, e.g. <https://docs.microsoft.com/en-us/windows/security/threat-protection/windows-platform-common-criteria>) and Google (for mobile devices, e.g. <https://www.niap-ccevs.org/Product/Compliant.cfm?PID=10941>) to rate their products are relying on the generic CEM methodology and the conformance claimed for vulnerability is AVA_VAN.1.

The JIL methodology is not suited for TEE products, the TEE methodology is not suited for smart cards products, and neither JIL nor GP TEE evaluation methodologies are suited for laptops and for mobile devices. It is therefore inadequate to present in the table multiple ratings for the same products. Each methodology answer the needs and objectives of the relevant stakeholders and are specified, and maintained, by the industry actors, which are deeply experimented in the evaluation of their products (RETEX). In addition, the table may erroneously suggest the proposed implementation examples can be certified at highest assurance level while no details on the implementation are given: what is the authenticator boundary, how is authenticator logically protected on that implementation etc. In fact, the examples given could be rated at 30, but could also be rated at 15 or 20, this will highly depend on the implementation, and the type of attacks it defends. As such, it is not because a given implementation has some resistance to physical attacks (directly on the die or memories as suggested in examples) that the product will succeed the certification: a security certification shall consider all the possible attack paths and must conclude there is no attack path below a defined threshold defined specifically in each evaluation method: the "absolute" rating, meaning the product is "resistant against attacker with potential X" can only be given through an evaluation/certification, where all attack paths are examined.

This is why the following table, kept here for history, has been replaced in the core document.

Case#	Examples	Common-Criteria CC Companion Program Smart Card (JIL Rating)	GlobalPlatform GP Companion Program (TEE Rating)	Typical FIDO Certification Level
AA	Mobile phone with HW key store	NA	NA	L1
A	IoT device 100MHz 32-bit CPU accessing DIMM socket memory. Low speed memory socket interface	7	10	L2
B	Laptop with high performance 2GHz CPU accessing DDR4 memory in a SO-DIMM. High speed memory socket interface	18	20	L2..L3
C	Laptop with high performance 2GHz CPU accessing DDR4 memory in a SO-DIMM with buried trace	18	21	L2..L3
D	Mobile phone SoC with 2GHz CPU with PoP memory	20	23	L2..L3
E	Mobile phone SoC with 2GHz CPU with memory and CPU die in the same package	23	26	L3
F	IoT device 32-bit 100MHz CPU with memory and CPU on the same die	27	30	L3+
G	SoC with CPU with strong inline memory encryption and integrity protection HW	33	34	L3+
H	Smart Card or Secure Element. Memory and CPU on the same die with hardware countermeasures	33	34	L3+

C. References

C.1 Normative references

[AttackPotentialSmartcards]

. [Application of Attack Potential to Smartcards](https://www.sogis.eu/documents/cc/domains/sc/JIL-Application-of-Attack-Potential-to-Smartcards-v3.2.pdf) January 2019. URL: <https://www.sogis.eu/documents/cc/domains/sc/JIL-Application-of-Attack-Potential-to-Smartcards-v3.2.pdf>

[CEMV3-1R5]

. [CCMB-2017-04-004 Common Methodology for Information Technology Security Evaluation - Evaluation Methodology](https://www.ccm-b-2017-04-004/Common%20Methodology%20for%20Information%20Technology%20Security%20Evaluation%20-%20Evaluation%20Methodology.pdf). April 2017. URL:

<https://www.commoncriteriaportal.org/files/ccfiles/CEMV3.1R5.pdf>

[FIDOAllowedCrypto]
Dr. Joshua E. Hill; Douglas Biggs; Dr. Beatrice Peirani; Rolf Lindemann. *FIDO Authenticator Allowed Cryptography List* URL: <https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-allowed-cryptography-list-v1.7-rd-20260506.html>

[FIDOAllowedCrypto1-2]
Dr. Joshua E. Hill; Douglas Biggs. *FIDO Authenticator Allowed Cryptography List v1.2* 29 June 2018. URL: <https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-allowed-cryptography-list-v1.2-fd-20180629.html>

[FIDOBiometricsRequirements]
Stephanie Schuckers; Greg Cannon; Elham Tabassi; Meagan Karlsson; Elaine Newton. *FIDO Biometrics Requirements*. October 2020. URL: <https://fidoalliance.org/specs/biometric/requirements/Biometrics-Requirements-v2.0-fd-20201006.html>

[FIDOCTAP]
C. Brand; A. Czeskis; J. Ehrensvarð; M. Jones; A. Kumar; R. Lindemann; A. Powers; J. Verrept. *FIDO 2.0: Client To Authenticator Protocol*. 30 January 2019. URL: <https://fidoalliance.org/specs/fido-v2.0-ps-20190130/fido-client-to-authenticator-protocol-v2.0-ps-20190130.html>

[FIDOEcdAaAlgorithm]
R. Lindemann; J. Camenisch; M. Drijvers; A. Edgington; A. Lehmann; R. Urian. *FIDO ECDSA Algorithm*. 23 May 2022. Proposed Standard. URL: <https://fidoalliance.org/specs/fido-v2.0-id-20180227/fido-ecdsa-algorithm-v2.0-id-20180227.html>

[FIDOGlossary]
R. Lindemann; D. Baghdasaryan; B. Hill; J. Hodges; J. Verrept. *FIDO Technical Glossary*. 23 May 2022. Proposed Standard. URL: <https://fidoalliance.org/specs/common-specs/fido-glossary-v2.1-ps-20220523.html>

[FIDOMetadataRequirements]
Meagan Karlsson; Roland Atoui; Beatrice Peirani. *FIDO Authenticator Metadata Requirements*. URL: <https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-metadata-requirements-v1.7-rd-20260506.html>

[FIDOMetadataStatement]
B. Jack; R. Lindemann; Y. Ackermann. *FIDO Metadata Statements*. 05 January 2026. Proposed Standard. URL: <https://fidoalliance.org/specs/mds/fido-metadata-statement-v3.1.1-ps-20260105.html>

[FIDORegistry]
R. Lindemann; Y. Ackermann; D. Baghdasaryan; B. Hill. *FIDO Registry of Predefined Values*. 05 January 2026. Proposed Standard. URL: <https://fidoalliance.org/specs/common-specs/fido-registry-v2.3-ps-20260105.html>

[FIDORestrictedOperatingEnv]
Laurence Lundblade; Meagan Karlsson. *FIDO Authenticator Allowed Restricted Operating Environments List* URL: <https://fidoalliance.org/specs/fido-security-requirements/fido-authenticator-allowed-restricted-operating-environments-list-v1.7-rd-20260506.html>

[FIDOSecRef]
R. Lindemann; D. Baghdasaryan; B. Hill; J. Hill; D. Biggs. *FIDO Security Reference*. 23 May 2022. Proposed Standard. URL: <https://fidoalliance.org/specs/common-specs/fido-security-ref-v2.1-ps-20220523.html>

[ISOIEC-18045]
Information technology -- Security techniques -- Methodology for IT security evaluation August 2008. URL: <https://www.iso.org/standard/46412.html>

[JCPP]
. *Java Card Protection Profile - Open Configuration* May 2012. URL: https://www.commoncriteriaportal.org/files/ppfiles/ANSSI-CC-profil_PP-2010-03en.pdf

[L1plus-Eval]
TBD. *Application of attack potential to FIDO L1+ (AAP)* May 2019. URL: <https://members.fidoalliance.org/wg/SPWG/document/10636>

[PP-0117]
EUROSMART. *BSI-CC-PP-0117 Secure Sub-System in System-on-Chip (3S in SoC) Protection Profile* 28 February 2022. Version 1.5. URL: <https://www.eurosmart.com/bsi-completes-evaluation-of-eurosmarts-secure-sub-system-in-system-on-chip-protection-profile-pp-0117/>

[PP0084]
. *BSI-CC-PP-0084-2014 Security IC Platform Protection Profile with Augmentation Packages* URL: https://www.commoncriteriaportal.org/files/ppfiles/pp0084b_pdf.pdf

[RFC2119]
S. Bradner. *Key words for use in RFCs to Indicate Requirement Levels* March 1997. Best Current Practice. URL: <https://tools.ietf.org/html/rfc2119>

[TEE-EM]
GlobalPlatform. *GPD_GUI_044 TEE Evaluation Methodology*. Most recent version applies. Available only to GlobalPlatform members. URL: <https://globalplatform.org/specs-library/tee-protection-profile-v1-3/>

[TEE-PP]
. *GPD_SPE_021 TEE Protection Profile version 1.3* September 2020. URL: <https://globalplatform.org/specs-library/tee-protection-profile-v1-3/>

[U2FimplCons]
D. Balfanz. *FIDO U2F Implementation Considerations v1.0* Proposed Standard. URL: <https://fidoalliance.org/specs/fido-u2f-v1.2-ps-20170411/fido-u2f-implementation-considerations-v1.2-ps-20170411.html>

[U2FPP]
. *BSI-PP-CC-0096-2017 FIDO Universal Second Faction (U2F) Authenticator Common Criteria Protection Profile* 26 June 2017. In Development. URL: https://www.bsi.bund.de/SharedDocs/Downloads/DE/BSI/Zertifizierung/Reporte/ReportePP/pp0096b_pdf.pdf?__blob=publicationFile&v=2

[U2FRawMsgs]
D. Balfanz; J. Ehrensvarð; J. Lang. *FIDO U2F Raw Message Formats v1.2* Proposed Standard. URL: <https://fidoalliance.org/specs/fido-u2f-v1.2-ps-20170411/fido-u2f-raw-message-formats-v1.2-ps-20170411.html>

[UAFAuthnCommands]
D. Baghdasaryan; J. Kemp; R. Lindemann; R. Sasson; B. Hill; J. Hodges; K. Yang. *FIDO UAF Authenticator Commands*. Proposed Standard. URL: <https://fidoalliance.org/specs/fido-uaf-v1.2-ps-20201020/fido-uaf-authn-cmds-v1.2-ps-20201020.html>

[UAFAuthnMetadata]
B. Hill; D. Baghdasaryan; J. Kemp. *FIDO UAF Authenticator Metadata Statements*. Proposed Standard. URL: <https://fidoalliance.org/specs/fido-v2.0-id-20180227/fido-metadata-statement-v2.0-id-20180227.html>

[UAFProtocol]
R. Lindemann; D. Baghdasaryan; E. Tiffany; D. Balfanz; B. Hill; J. Hodges; K. Yang. *FIDO UAF Protocol Specification v1.2* Proposed Standard. URL: <https://fidoalliance.org/specs/fido-uaf-v1.2-ps-20201020/fido-uaf-protocol-v1.2-ps-20201020.html>

[UAFRegistry]
R. Lindemann; D. Baghdasaryan; B. Hill. *FIDO UAF Registry of Predefined Values* Proposed Standard. URL: <https://fidoalliance.org/specs/fido-uaf-v1.2-ps-20201020/fido-uaf-reg-v1.2-ps-20201020.html>

[WebAuthn]
Dirk Balfanz (Google); Alexei Czeskis (Google); Jeff Hodges (Google); J.C. Jones (Mozilla); Michael B. Jones (Microsoft); Akshay Kumar (Microsoft); Rolf Lindemann (Nok Nok Labs); Emil Lundberg (Yubico); Vijay Bharadwaj (Microsoft); Arnar Birgisson (Google); Hubert Le Van Gong (PayPal); Angelo Liao (Microsoft); John Bradley (Yubico); Christiaan Brand (Google); Adam Langley (Google); Giridhar Mandyam (Qualcomm); Nina Satragno (Google); Nick Steele (Gemini); Jiewen Tan (Apple); Shane Weeden (IBM); Mike West (Google); Jeffrey Yasskin (Google). *Web Authentication: An API for accessing Public Key Credentials Level 2* 8 April 2021. TR. URL: <https://www.w3.org/TR/webauthn-2/>

C.2 Informative references

[AES-Proposal]
Joan Daemen; Vincent Rijmen. *AES Proposal: Rijindael*. March 1999. URL: https://cs.ru.nl/~joan/papers/JDA_VRI_Rijndael_V2_1999.pdf

[BEAT]
N. Tekampe; A. Merle; J. Bringer; M. Gomez-Barrero; J. Fierrez; J. Galbally (UAM). *BEAT: Towards the Common Criteria evaluations of biometric systems* URL: <https://www.beat-eu.org/project/deliverables-public/d6-5-toward-common-criteria-evaluations-of-biometric-systems>

[CAFVM]
. *CCDB-2008-09-002 Characterizing Attacks to Fingerprint Verification Mechanisms* 2011. published. URL: <https://www.commoncriteriaportal.org/files/supdocs/CCDB-2008-09-002.pdf>

[CC3V3-1R5]
. *CCMB-2017-04-001 Common Criteria for Information Technology Security Evaluation, Part 3: Security assurance requirements* April 2017. URL: <https://www.commoncriteriaportal.org/files/ccfiles/CCPART3V3.1R5.pdf>

[CYBER]
ETSI TR 103 642 CYBER: *Security techniques for protecting software in a white box model* October 2018. URL: https://www.etsi.org/deliver/etsi_tr/103600_103699/103642/01.01.01_60/tr_103642v010101p.pdf

[FIDO-SR-Mapping-Table]
R. Atoui; J. Hill. *FIDO Security Requirements Partner Program Mapping Table* Working Draft. URL: https://fidoalliance.org/specs/fido-security-requirements/FIDO%20SRs%20L3-L3+%20Companion%20Program%20Mapping%20Table_20200824_RELEASE.xlsx

[FIDOAuthenticatorCertificationPolicy]
Rae Rivera; Roland Atoui; Beatrice Peirani. *FIDO Certification Program - Policy Authenticator Certification* September 2020. URL: <https://media.fidoalliance.org/wp->

- [content/uploads/2020/12/FIDO-Authenticator_Certification_Program_policy_v1.3_FINAL_September2020.pdf](#)
- [FIDO Lab Policy]
CWG. *FIDO Certification Program - Security Laboratory Accreditation Policy* May 2017. Published. URL: https://media.fidoalliance.org/wp-content/uploads/SecurityLaboratoryAccreditationPolicy_v1.1_20170526.pdf
- [FIDO Metadata Service]
B. Jack; R. Lindemann; Y. Ackermann. *FIDO Metadata Service*. 05 January 2026. Proposed Standard. URL: <https://fidoalliance.org/specs/mds/fido-metadata-service-v3.1.1-ps-20260105.html>
- [FSDPP]
Arnold Abromeit; Nils Tekampe; Boris Leidner. *BSI-CC-PP-0063 Fingerprint Spoof Detection Protection Profile (FSDPP)* 2009. URL: https://www.bsi.bund.de/SharedDocs/Downloads/DE/BSI/Zertifizierung/Reporte/ReportePP/pp0063b_pdf.pdf?jsessionid=F3E8E04854B2BE0ABB3006A2258043F1.1_cid369?__blob=publicationFile&v=1
- [ISO/IEC-7498-2]
. *ISO/IEC 7498-2:1989 Information processing systems — Open Systems Interconnection — Basic Reference Model — Part 2: Security Architecture* 1989. URL: <https://www.iso.org/standard/14256.html>
- [SP800-132]
Meltem Sönmez Turan; Elaine Barker; William Burr; Lily Chen. *NIST Special Publication 800-132: Transitions: Recommendation for Password-Based Key Derivation* December 2010. URL: <http://csrc.nist.gov/publications/nistpubs/800-132/nist-sp800-132.pdf>